

Norman U-115 Series Tee-Type Filters



Up to
20,000 PSI


- Stainless Steel Housings
- Pleated Stainless Steel, Glass Fiber and Cellulose Elements for Greater Dirt Holding Capacity
- 2-100 Micron



NORMAN FILTER COMPANY, L.L.C.

PHONE: 708-233-5521 • FAX: 708-430-5961

sales@normanfilters.com • www.normanfilters.com

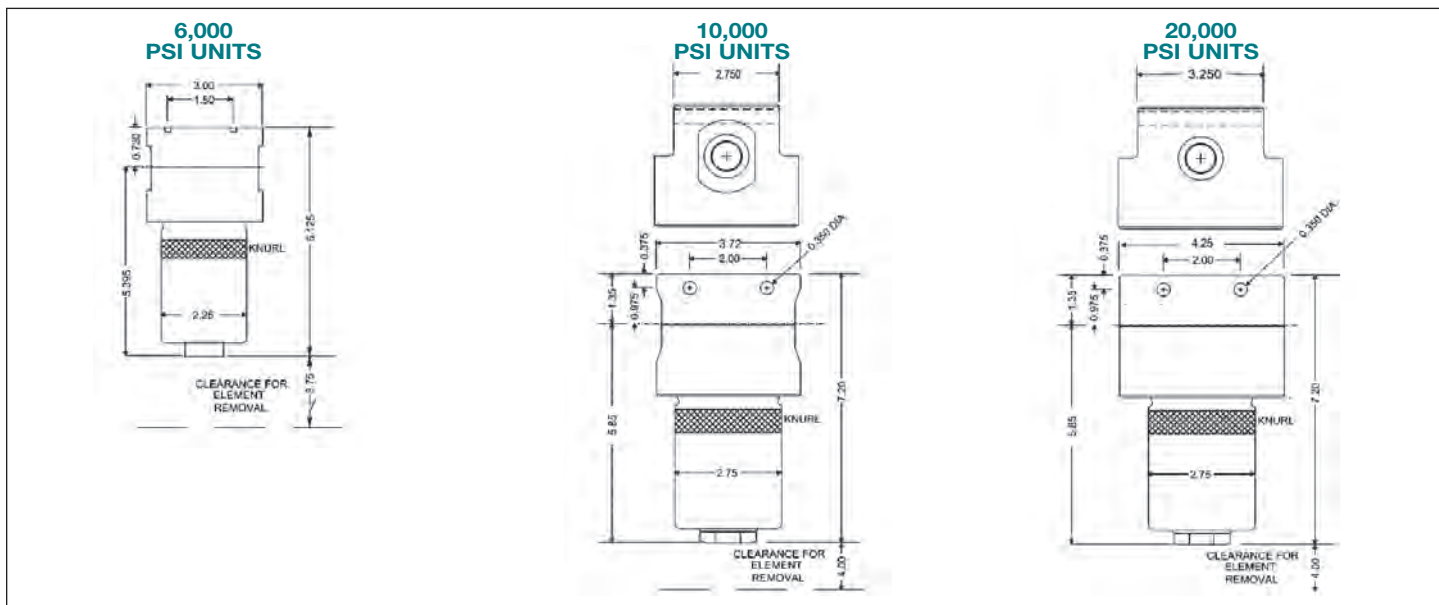

SPECIFICATIONS

Housing Material:

316 Stainless Steel
6,000 PSI
17-4 Stainless Steel
10,000 PSI

Element Media:

304 Stainless Steel Mesh
10, 25, 40, 75 Micron ABS
Glass Fiber
3, 5, 10, 25 Micron ABS
Cellulose
10, 25, 40 Micron ABS

Flow Rate:

7.5 GPM (100 SSU oil)

Pressure Ratings:

	316SS	17-4SS
Operating	6,000	10,000
Proof	9,000	15,000
Burst	24,000	40,000

Element Temperature Range:

304 Stainless Mesh: -425°F to +1,000°F
Glass Fiber: -70°F to +350°F
Cellulose: -65°F to +275°F


O-Ring Temperature Range:

Buna N: -40°F to +250°F
Viton: -20°F to +350°F
Ethylene Propylene: -65°F to +300°F
Teflon™: -148°F to +400°F
Kalrez™: -40°F to +600°F

Teflon™ and Kalrez™ are registered trademarks of DuPont

HOW-TO-ORDER

Housing Material	Element Code	Code	Fitting Size	Code	Fitting Type	Micron Rating						Collapse Rating				O-Ring Material				Optional Accessories			
G 17-4 Stainless	A Cellulose	2	1/8"	P	NPT Female	2X	2	10	•	•	•	•	•	•	P	150# Cellulose	L	Buna-N	DR-1	1/8" NPT Bowl Drain			
T 316 Stainless	F Glass Fiber	4	1/4"	S	MS33649	B3	—	3	•	•	•	•	•	A	300# Glass Fiber	N	Viton	DR-2	1/4" NPT Bowl Drain				
P 17-4 Stainless	G Stainless Mesh	6	3/8"			03	3	10	•	•	•	•	•	C	3250# Glass Fiber	E	Ethylene Propylene	EE	40 PSID				
		8	1/2"			05	5	18	•	•	•	•	•	D	4500# Stainless Mesh	M	Teflon™	EER	Elec. Switch*				
		250	1/4" M/P*			B5	—	5	•	•	•	•	•			K	90 Durometer Nitrile*	R	Switch + Valve*				
		375	3/8" M/P*			7	7	7	•	•	•	•	•			H	Kalrez™	S1	50 PSID Valve*				
		562	9/16" M/P*			10	10	25	•	•	•	•	•					S2	1/8" NPT DP Ports				
						B10	—	10	•	•	•	•	•					S3	1/4" NPT DP Ports				
						20	20	40	•	•	•	•	•					S4	1/8" SAE DP Ports				
						25	25	40	•	•	•	•	•					S3	1/4" SAE DP Ports				
						B25	—	25	•	•	•	•	•					S4	1/4" SAE DP Ports				
						40	40	75	•	•	•	•	•					V	40 PSID				
						100	100	200	•	•	•	•	•					VR	Indicator*				
																			VR	Indicator + Valve*			

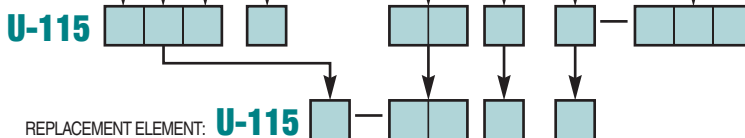

NORMAN FILTER COMPANY, L.L.C.

9850 SOUTH INDUSTRIAL DRIVE
BRIDGEVIEW, ILLINOIS 60455
PHONE: 708-233-5521
FAX: 708-430-5961
EMAIL: SALES@NORMANFILTERS.COM
WWW.NORMANFILTERS.COM

DISTRIBUTED BY: