



RQ-K2000 SERIES Integrated Rostrum



Microphone
C/W Indicator



*Reading Light
(optional)



Easy Carry



High Power
Loudspeaker



*Trolley Wheel with
Lockable Wheel
(optional)

Everything you ever wanted in a Rostrum

Introducing the awesome new **EMIX** Rostrum. The Integrated Rostrum is the most innovative, unique, functional and beautiful Rostrum in the market today. Crafted from the finest wood and laminated with PVC material. This awesome Integrated Rostrum come with a standard powerful sound system that will deliver your message with unparalleled clarity, and a rich elegant presentation.


The Rostrum penter polyster fabric with poly vinyl chloride (PVC) coating and it is 0.6 mm thick. It will help to protect your Rostrum from scratches as well as help resist against liquip spills.

Features


- > Built-in 60 watts Amplifier come with 2 way system (10" speaker & 2" tweeter)
- > Tape or CD record output jack provided
- > Independent phantom power for condenser microphone
- > Wide frequency response with wide dispersion
- > Recessed brass reading lamp with on / off switch
- > External booster amplifier can be used

INTEGRATED ROSTRUM

RQ-K2000 SERIES Integrated Rostrum

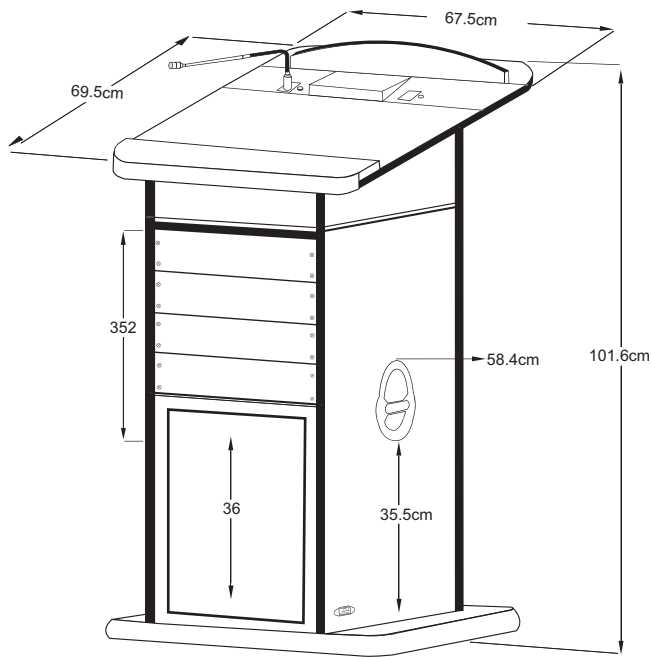

Rostrum Dimension

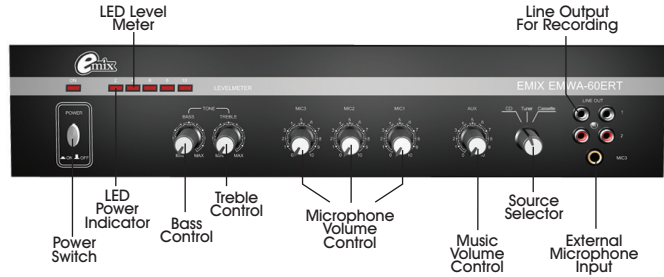

Cassette / CD / USB / AM/FM Tuner



CD / USB / AM/FM Tuner

Model	Version Description
R-2003	Empty Rostrum with 19" Mounting Track without Lamp / Mic Panel Mounting hole
RQ-K2006	Built-in Speaker with Mixing Amplifier / Cassette / CD / USB / AM/FM Tuner
RQ-K2008	Built-in Speaker with Mixing Amplifier / CD / USB / AM/FM Tuner

Model	RQ-K Series
Rated Power	30W
Max Power	60W
Speaker Size	10"
Rated Impedance	8Ω
Speaker Rated Power	100W
Sound Pressure Level (at 1KHz , 1m)	98dB
Frequency Response	60Hz - 20KHz
Opening Angle	90° x 40°
Tone Control	
Bass	±10dB 100Hz
Treble	±10dB 10KHz
Input	
Mic 1, Phantom Power	Priority, with Volume Control
Mic 2, Phantom Power	With Volume Control
Mic 3, Phantom Power	With Volume Control
CD / Tuner / Cassette	With Volume Control
Power Consumption	5A
Main Voltage	230, 50/60Hz
Color	Dark Rose Wood
Dimensions (W x H x D)	740 x 1100 x 528 mm
Weight	55kg

FM / AM RADIO TUNER	
Tuning Range	530kHz ~ 1720kHz (AM) 87.5 ~ 108mHz (FM)
Sensitivity	< 10uV
Frequency Response	100Hz ~ 12kHz
Total Harmonic Distortion	< 0.8% (1mV ; 40kHz)
Signal Noise Ratio	> 60dB
Automatic Tuning Sensitivity	< 50uV

CASSETTE	
Motor	DC Servo Motor
Frequency Response	60Hz - 13kHz
Signal to Noise	58dB

CD / MP3 / USB	
Audio Output Level	1.2V (±2dBu)
Frequency Response	40Hz - 20kHz
Total Harmonic Distortion	< 0.1%
Signal Noise Ratio	> 70dB
Remote Control	Included

INTEGRATED ROSTRUM