

Synergy[®]



TREND[®]
WINDOWS  & DOORS

Residential Series

contents

Trend® Windows & Doors	2
Trend® Windows	
Double Hung	3
Awning	5
Casement	7
Sliding	9
Bay	11
Trend® Doors	
Sliding	13
Alfresco Stacker	15
Provincial Hinged	17
Thermashield®	19
SoundMizer® Acoustics	20
Product Installation	21
Guarantee	21
Care & Maintenance	22

Trend® National Customer Assistance Centre

(between 8:30am - 4:30pm EST, M-F)

13 72 74

www.trendwindows.com.au

email: info@trendwindows.com.au

NOTE: Hardware displayed in photography may vary from state to state due to supplier or availability. Trend® Windows & Doors Pty Ltd reserve the right to make changes to product(s) without notice.

trend® windows & doors

Create a welcoming ambience and sense of style in your home with Trend® Windows & Doors.

Choose from the largest, most comprehensive range in Australia with more design and performance features than ever before.

Trend® offers experience, quality and service that you can rely on. Trend® understands that choosing the right windows and doors for your home is critical, so here are some pointers to assist you.

Quality & Durability

Windows and doors should be strong and well made, providing you with many years of effortless performance. All Trend® windows and doors carry the Australian Window Performance label.

Trend® will inspire you with the options available and provide you with the expertise to create a perfect environment in your home.

Design & Style

Colour, style, size and shape of windows and doors enhance the charm and character of your home, both inside and out. You can create exactly the look and feel you want for your home, with just the right amount of natural light.

Energy Efficiency

Enhancing the comfort of your home depends significantly on the amount of ventilation and insulation provided by your windows and doors.

A cool breeze in summer is refreshing and staying warm in winter is essential. With Australia's diverse climate it is important to consider the best design options for your location and individual needs.

Trend® can offer advice on how to save money on energy costs by choosing the appropriate sash style, glass type and style for your particular climatic conditions.

Safety & Security

Your family needs to feel safe and secure, so it is essential to use locks and frames that will deter unwanted entry.

Trend® can assist you with these decisions as Trend® products adhere to the highest standards of safety and security.

Your Individual Needs

You may have specific needs, such as arches, glazing bars or bay windows or a specific glass or hardware type.

Trend® provides you with complete design flexibility.

Bushfire Protection

Xtreme® bushfire protection that has been tested by CSIRO to BAL-40, which is fully compliant to AS1530.8.1 within AS3959-2009 is available.



Members of the Australian Window Association

double hung window



Synergy® double hung windows offer a timeless elegance equally at home in contemporary designs as in more traditional houses.

The flexible design lets you adjust airflow to the season and your frame of mind. Open the top, the bottom or both sashes. Interlocking top and bottom sashes also provide added strength and security.

All with the benefits of aluminium, low maintenance, durability and a broad range of powdercoat finishes. You can also create that timber look and feel by combining classic round profile, colonial bars or horns with wide style sashes.

- 1 Energy Efficiency Options
To reduce energy consumption, Thermashield® systems are available in various WERS ratings and glazing styles.
- 2 Acoustic Options
SoundMizer® acoustic solutions are available for double hung windows.
- 3 Key Locks
Widestyle double hung windows are available with key lock as standard. Optional vent locks are also available.
- 4 Interlocking Meeting Rails
The interlocking meeting rails on the sashes combine together when closed to improve the overall weather performance strength.
- 5 Weather Sealing
All sashes are fitted with weathertight seals to keep out dust and water.

- 6 Sash Styles
Available in three sash styles - standard, designer and widestyle. Both designer and widestyle are available with optional ovolo bar. Widestyle double hung has a solid timber look and colonial horns are supplied as standard (If no colonial horns are required please advise at time of quoting).
- 7 Complementary Accessories
 - 180° non-load bearing couplers, two types available for added mullion strength when required.
 - 135° and 90° non-load bearing corner couplers to suit bay and kitchen windows.
 - Adjustable aluminium storm mould.
 - Aluminium 180° and 90° mullion covers to hide load bearing posts.
- 8 Options
 - Colonial, federation and custom styles with ovolo bar layouts.
 - Easy-to-fit flyscreens.
 - Wide range of powdercoat finishes are available.

This product rates to BAL-29.

Note: Double glazing is only available in widestyle double hung



awning window



Synergy® awning windows epitomise the easy living Australian way of life. Maximising space and light with contemporary, clean designs.

For a more classic look consider the ovolo round sash bar profile - perfect for traditional style homes.

On a practical level, the optional high quality stainless steel chain winder stop windows slamming, while the hood protects against the elements.

- 1 **Energy Efficiency Options**
To reduce energy consumption, Thermashield® systems are available in various WERS ratings and glazing styles.
- 2 **Acoustic Options**
SoundMizer® acoustic solutions are available for awning windows.
- 3 **Key Lock Chain Winder**
Awning window winder mechanism is designed specifically for high performance, security and reliability. Supplied with a stainless steel chain as standard for long life and reliability. The mechanisms are mounted securely to the window with a concealed 2-point fixing. Key lock is standard for added security.
- 4 **Continuous Hinge Hood**
The sash is protected from the weather by a continuous hinge hood.
- 5 **Weather Protection**
The tubular splayed sash, with self-draining trough, assists the continuous surround bulb seal to protect against the weather.
- 6 **Sash Corner Protection**
The bottom rail sash corners are protected by custom nylon covers that act as a sash guide into the frame.
- 7 **Complementary Accessories**
 - 180° non-load bearing couplers, two types available for added mullion strength when required.
 - 135° and 90° non-load bearing corner couplers to suit bay and kitchen windows.
 - Adjustable aluminium storm mould.
 - Aluminium 180° and 90° mullion covers to hide load bearing posts.
- 8 **Window Placement**
Care should be taken with locating opening awning windows in pedestrian traffic areas.
- 9 **Options**
 - Easy-to-fit tension loaded flyscreens that can be fitted and removed from the inside.
 - Wide range of powdercoat finishes are available.
 - Xtreme® BAL-40 bushfire protection is available.



casement window

QLD ONLY



Synergy® casement windows are a classic design, bringing character and romance to any home.

Their strong angular lines overcome that boxy feeling and are great at capturing cooling summer breezes.

Our durable, lever operated cam catch ensures everything closes securely and you can also order specially designed fly screens.

On a practical level the 90° opening allows the outside of each window to be easily cleaned from the inside.

- 1 Energy Efficiency Options
To reduce energy consumption, Thermashield® systems are available in various WERS ratings and glazing styles.
- 2 Acoustic Options
SoundMizer® acoustic solutions are available for casement windows.
- 3 Opening
The 90° opening of casement windows makes cleaning on both sides of the sash uncomplicated. Sashes are fitted with stainless steel stays, which allow the sash to move away from the window jamb.
- 4 PVC Bulb Seal
Sash perimeter is fitted with a PVC bulb seal ensuring a weather tight seal.
- 5 Complementary Accessories
 - 180° non-load bearing couplers, two types for added mullion strength when required.
 - 135° and 90° non-load bearing corner couplers to suit bay and kitchen windows.
 - Adjustable aluminium storm mould.
 - Extruded aluminium 180° mullion covers to hide load bearing posts.
- 6 Window Placement
Care should be taken with locating opening casement windows in pedestrian traffic areas.
- 7 Options
 - Colonial, federation and custom styles with ovolo bar layouts.
 - Wide range of powdercoat finishes are available.

This product rates to BAL-29.



sliding window



Synergy® sliding windows are perfect for capturing that special view or garden outlook.

They create a clean uncluttered look that opens the room up so you can enjoy that indoor - outdoor feeling that makes the most of warm summer evenings or winter sun.

The extra durable rollers ensure the aluminium frames always glide smooth and true.

While optional ventilation key locks allow you to lock the windows partially open to catch cooling breezes.

- 1 **Energy Efficiency Options**
To reduce energy consumption, Thermashield® systems are available in various WERS ratings and glazing styles.
- 2 **Acoustic Options**
SoundMizer® acoustic solutions are available for sliding windows.
- 3 **Locks**
Sliding windows are supplied with key lock cam handle as standard or with optional vent lock.
- 4 **Removable Fixed Sash**
The fixed sash on sliding windows is removable to enable re-handing on site. It is also possible to remove the sash and take it offsite for repair.
- 5 **Glazing**
Double glazing is available for these sashes. Sash glass is protected by a full wrap-around glazing channel. The window can also be re-glazed from inside the building.
- 6 **Sill Baffle**
The sliding window has an external full width sill baffle covering drainage outlets, thereby reducing infiltration of dust and drafts.
- 7 **Sash Rollers**
Sash rollers are height adjustable and sashes glide effortlessly on graphite impregnated rollers. Double bogey adjustable roller for heavy or double glazed sashes are also available.
- 8 **Weathershield Fin**
The weathershield fin prevents metal to metal contact in the operation of sliding sashes, resulting in a reduction of air and dust penetration.
- 9 **Complementary Accessories**
 - 180° non-load bearing couplers, two types available for added mullion strength when required.
 - 135° and 90° non-load bearing corner couplers to suit bay and kitchen windows.
 - Adjustable aluminium storm mould.
 - Extruded aluminium 180° and 90° mullion covers to hide load bearing posts.
- 10 **Options**
 - Colonial and federation bar layouts.
 - Easy-to-fit flyscreens.
 - Wide range of powdercoat finishes are available.
 - Xtreme® BAL-40 bushfire protection is available.



b a y w i n d o w




A bay window adds distinctive charm and character to bedrooms or living areas, by helping to make the most of views - creating sun filled reading nooks for winter or cool and shady relaxing spaces in summer.

An individual touch that sets your house apart from the crowd.

With this in mind, you can design your bay window around any combination of windows in the Synergy[®] range.

It's your home - the choice is up to you.

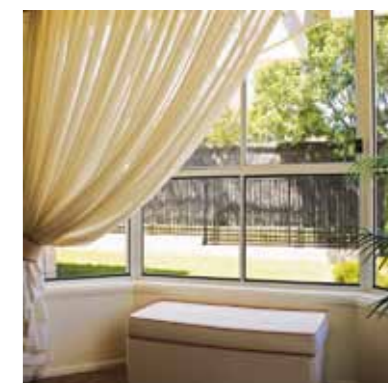

sliding door



Synergy® sliding doors make living smooth and easy - blending outdoors seamlessly with indoors. Create sliding walls of glass and add a fresh dimension to your home so it feels brighter and bigger.


Perfect for framing a view or making more of your garden and balconies. Synergy® sliding doors come in variety of styles to suit both contemporary and more traditional designs.

Adjustable, extra durable rollers ensure they always glide easily and the powder coated finish is equally easy to look after.

Options include matching screen and barrier doors. Sump sills are available for exposed areas. Wheelchair access is available with the Easyrider™ sill.

- 1 Energy Efficiency Options
To reduce energy consumption, Thermashield® systems are available in various WERS ratings and glazing styles.
- 2 Acoustic Options
SoundMizer® acoustic solutions are available for sliding doors.
- 3 Locks
Sliding doors are fitted with standard locks and upgrade to "D" handle is optional.
- 4 Protected Rolling Track
An extruded aluminium splayed threshold protects both glass door and flydoor rolling tracks.
- 5 Wheelchair Access
Aluminium threshold features the Easyrider™ sill, which is ideal for wheelchair access.
- 6 Heavy Duty Rollers
Sliding doors are fitted with heavy duty, double bogey, roller systems for smooth operation.
- 7 Frames
Frame is 102mm wide (with standard locks).
Maximum door height is 2400mm.
Maximum panel width is 1500mm.
Maximum door width is 6010mm.
- 8 Interlockers
Three types of interlockers are available depending on structural pascal ratings. The sliding door structural rating is 1500 pascals (kPa).
- 9 Screen Door
An external extruded aluminium sliding screen door can be fitted with spring loaded acetal wheels. Ensuring the screen door stays on the track and operates smoothly.
- 10 Safety Glazing
Toughened Safety A Grade glass with a visual motif at mid-point provided. Laminated glass is used in all non-standard door sizes. Glass sits into the extrusion door glazing pocket up to 13mm.
- 11 Complementary Accessories
 - 180° non-load bearing couplers.
 - 135° non-load bearing corner couplers.
 - Adjustable aluminium storm mould.
 - Extruded aluminium 180° mullion covers to hide load bearing posts.
- 12 Options
 - Colonial and federation bars and ovolo adaptor.
 - Easy-to-fit flyscreens.
 - Wide range of powdercoat finishes are available.

This product rates to BAL-29.

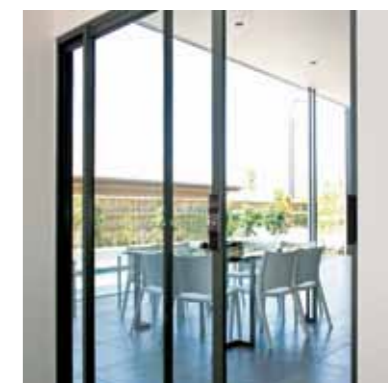

alfresco stacker door




The modern fine-line styling of Synergy® alfresco stacker doors complement contemporary living perfectly.

Alfresco stacker doors open wide for easy access to your patio, courtyard, sundeck or garden. Make the most of your home by extending and combining your indoor and outdoor living areas.

Open up your outdoor view with Synergy® alfresco stacker doors.

- 1 Energy Efficiency Options
To reduce energy consumption, Thermashield® systems are available in various WERS ratings and glazing styles.
- 2 Acoustic Options
SoundMizer® acoustic solutions are available for alfresco stacker doors.
- 3 Locks
Sliding doors are fitted with standard lock and can be upgraded.
- 4 Protected Rolling Track
An extruded aluminium splayed threshold protects both glass door and flydoor rolling tracks.
- 5 Wheelchair Access
The aluminium threshold features the Easyrider™ sill, which is ideal for wheelchair access.
- 6 Heavy Duty Rollers
Sliding doors are fitted with heavy duty, double bogey, roller systems for smooth operation.
- 7 Frames
Frame is 162mm wide (including screen track) with the slimline sash.
Maximum door height is 2400mm.
Maximum panel width is 1500mm.
Maximum door width is 4500mm (3 lites).
Maximum door width is 6400mm (6 lites).
- 8 Interlockers
Three types of interlockers are available depending on structural pascal ratings. The stacker door structural rating is 1500 pascals (kPa).
- 9 Screen Door
An external extruded aluminium sliding screen door can be fitted with spring loaded acetal wheels. Ensuring the screen door stays on the track and operates smoothly.
- 10 Safety Glazing
Toughened Safety A Grade glass with a visual motif at mid-point provided. Laminated glass is used in all non-standard door sizes. Glass sits into the extrusion door glazing pocket up to 13mm.
- 11 Complementary Accessories
 - 180° non-load bearing couplers.
 - 135° non-load bearing corner couplers.
 - Adjustable aluminium storm mould.
 - Extruded aluminium 180° mullion covers to hide load bearing posts.
- 12 Options
 - Colonial and federation bars and ovolo adaptor.
 - Easy-to-fit flyscreens.
 - Wide range of powdercoat finishes are available.

This product rates to BAL-29.

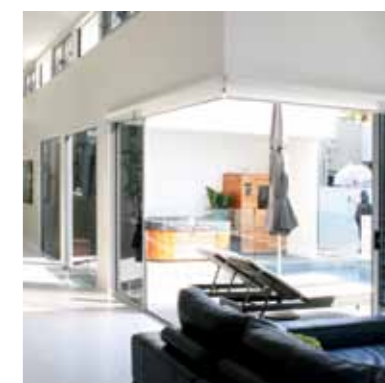

provincial hinged door



Trend® knows doors inside out. More than just a means to an end, the right door will transform the flow of a room or an entire house, bringing the outdoors in and making the most of available space.

Whether you're looking for a traditional frame, something more contemporary or classic french doors, we'll help you find exactly the right design to suit the character of your home.

Combinations of glass and/or aluminium raised or flat panels can be combined with any door to make a grand statement or simply let the sun shine in. Ovolo colonial style small pane glass panels can be added - giving you a timeless timber look with all the durability and strength of aluminium.

- 1 Energy Efficiency Options
To reduce energy consumption, Thermashield® systems are available in various WERS ratings and glazing styles.
- 2 Acoustic Options
SoundMizer® acoustic solutions are available for provincial hinged doors.
- 3 Locks
Standard night latch 4 point deadlock is fitted for security and weather tightness. Night latch feature is when the door handle is visually displayed in the vertical position this means that the door is locked on the inside without the use of a key, and can only be accessed with a key from the outside.
- 4 Hinges
The door is hung on adjustable lift off hinges to eliminate binding. The door can also be supplied with parliament hinges where the door is to swing out flush to brickwork.
- 5 Drained Sill
A fully drained sill is standard to improve weathering on the door.
- 6 Side-lites
Matching side-lites in the style of swing doors are available. Other options like high-lites and arches are also available.
- 7 Opening
Door can be ordered as open-in or open-out.
- 8 Safety Glazing
Toughened Safety A Grade glass with a visual motif at mid-point provided. Laminated glass is used in all non-standard door sizes.
- 9 Options
 - Screen door is available.
 - Colonial, federation and custom styles with ovolo bar layouts.
 - Wide range of powdercoat finishes are available.
 - Xtreme® BAL-40 bushfire protection is available.



thermashield system



Windows and doors that utilise the advanced properties of Thermashield® energy efficient systems, offer a much more precise way to shield your home from weather extremes.

The Thermashield® system makes it easy to evaluate the level of protection required for specific windows and doors in your home.

To get the best energy savings, and the most comfort, different windows and doors are required for different climates. In cold climate areas, Thermashield® can prevent heat loss, air leakage, and create warmer window surfaces, while significantly reducing solar heat gain in hot climate areas.

High-performance Thermashield® systems make buildings more energy efficient, more comfortable and reduce peak heating and cooling loads.

high-performance
energy
efficient
systems



soundmizer acoustics

SoundMizer®

With the constant need to combat extremes of noise, windows and doors can often be the weakest link in the isolation of noise from outside a home.

SoundMizer® products are high-performance, acoustic windows and doors designed to minimise troublesome noise.

All acoustic products are tested by industry laboratories and adhere to current Australian standards. Solutions are available for high-traffic areas including freeways, railway environments and airport surroundings.

Acoustic solutions up to Rw 46 can be achieved with single and secondary glazing elements for any noisy environment.



ACOUSTIC SOLUTIONS
designed to
minimise
troublesome noise



trend® guarantee

- (a) The following statement only applies to a consumer sale of goods or services as defined in the Australian Consumer Law:
- (i) Our Goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the Goods repaired or replaced if the Goods fail to be of acceptable quality and the failure does not amount to a major failure.
- (b) Trend guarantees the Goods supplied will be free against defects arising from faulty workmanship or materials for a period of seven (7) years (one (1) year for Goods considered by Trend® as moving parts) from date of delivery and guarantees that services will be rendered with due care and skill. The guarantees are subject to the following conditions being complied with by the Customer:
- (i) The Goods are installed (where Goods are not installed by Trend® and maintained in accordance with the manufacturer's recommendations (refer to Trend®'s Installation Guide and Care and Maintenance Guide, available at www.trendwindows.com.au or from Trend®'s Sales offices) and has not been subject to misuse, abuse or neglect;
 - (ii) Timber Goods are sealed (within one (1) month of delivery) with two coats of paint, varnish or sealer to both faces and edges including top and bottom. Exterior quality finishes in light reflective colours (NOT dark colours) must be applied to all Goods exposed to direct sunlight or the elements;
 - (iii) All solid construction timber doors are hung with three (3) 100mm hinges;
 - (iv) A warp in a door will not be considered a defect unless it exceeds 4mm for doors up to 2,150mm high, 6mm for door heights between 2,150mm and 2,400mm and 7mm for door heights above 2,400mm;
 - (v) Aluminium product surfaces that have been treated with a powdercoat finish provide a much higher resistance to scratching or scuffing and protect against normal weather conditions. However Trend® does not warrant against fading or colour change due to normal weather conditions that will cause any coloured surface to fade or darken gradually.
- (c) Notwithstanding clause 9(a), the liability of Trend® in respect of a breach of a consumer guarantee or any warranty made under these Terms and Conditions for any Goods not of a kind ordinarily acquired for personal, domestic or household use is limited, to the extent permitted by law and at the option of Trend® to:
- (i) in the case of supply of Goods;
 - (A) replacing the Goods or the supply of equivalent Goods;
 - (B) the repair of the Goods;
 - (C) the payment of the cost of replacing the Goods or of acquiring equivalent Goods; or
 - (D) the payment of the cost of having the Goods repaired.
 - (ii) in the case of supply of Services;
 - (A) the supplying of the Services again; or
 - (B) the payment of the cost of having the Services supplied again.
- (d) To the extent permitted by law, all other warranties whether implied or otherwise, not set out in these Terms and Conditions are excluded and Trend® is not liable in contract, tort (including, without limitation, negligence or breach of statutory duty) or otherwise to compensate the Customer for:
- (i) any increased costs or expenses;
 - (ii) any loss of profit, revenue, business, contracts or anticipated savings;
 - (iii) any loss or expense resulting from a claim by a third party; or
 - (iv) any special, indirect or consequential loss or damage of any nature whatsoever caused by Trend®'s failure to complete or delay in completing the order to deliver the Goods.
- (e) To claim the warranty provided under this clause, the Customer must, within 7 days of identifying the defect in the Goods, provide written notice of the defect to the supplier from whom the Goods were purchased or to the nearest Trend® location listed on the Trend® website.
- (f) Where Trend® determines that the Customer is entitled to the warranty under this clause and the Goods have not been affixed to property to the extent that Trend® cannot easily remove the Goods from the property, Trend® agrees to bear the cost of claiming the warranty.
- (g) The benefits provided to the Customer by the warranty are in addition to other rights and remedies available to the Customer under the law.

installation instructions

1. Fit flashing to window surround as required.
 2. Frame must be packed plumb, square and not twisted between the opening. Ensure the sill is fully supported, failure to do so may result in sill roll on windows.
 3. Secure aluminium windows by nailing through reveal. Timber windows should be secured by back nailing through stud, not face of frame to stud. Alternatively, on cavity brick construction use galvanised building lugs located at 450mm maximum centres.
 4. Keep sash closed whilst installing frames.
 5. Sill bricks should be at least 15mm clear of window frame to allow for settlement.
 6. Do not stand on the windows, or use them as a support for scaffolding, or slide material through the frame.
 7. Do not permit weight of eaves or arch bars to bear on aluminium or timber frames.
 8. Remove cement mortar dropping from windows immediately, taking care to avoid scratching glass and frames, as permanent damage can result.
 9. Timber windows should have a first coat of an appropriate paint, oil or stain applied to all faces of the product within thirty (30) days of delivery. Do not paint timber in dark colours. Prior to sealing, avoid placing timber near gum trees, sawdust and metal filings, as staining may occur to all faces.
- No guarantee will be given if timber or aluminium painted surfaces come into contact with acid when cleaning brickwork.

care & maintenance

On site, windows and doors should be stored in a clean dry area free from cement, lime, paint, acid etc.

During installation they must be protected from building fall-out such as wet plaster, mortar, paint and welding splatter. Remove wet plaster, cement, mortar and other droppings immediately, using ample clean water and a sponge or rag, to avoid permanent staining or scratching of finished surfaces.

If removal is delayed and scraping becomes necessary the surface finish may suffer.

Door tracks and window sills should be protected from planks, scaffolding and barrows, and kept clean of grit and dirt.

Acid used for cleaning brickwork must be prevented from dripping onto aluminium or timber surfaces. Should this fail the acid must be immediately washed off with ample clean water.

If using a hose or similar apparatus to clean windows and/or doors ensure the hose nozzle/jet fitting is set to a fine spray as shown in the diagram. At no time should a window or door be hit with full force of a hose nozzle/jet setting.

If strippable coatings or pressure sensitive tapes are used to protect exposed surfaces, care must be taken not to damage the finish during their removal. Prolonged exposure to sunlight can make them increasingly difficult to remove.





maintenance conditions

1. All powdercoated surfaces should be cleaned using a soft cloth or sponge with a solution of warm water.

Where the atmosphere is deemed to be non-hazardous eg. rural, the period between cleaning frequency can be extended up to twelve (12) months.

In industrial environments or environments with atmospheric pollution the normal frequency of cleaning should be at not more than three (3) monthly intervals. However, where there is high atmospheric pollution, such as a marine/coastal environment, cleaning should be conducted at monthly intervals.

2. Remove cement mortar dropping from windows immediately, taking care to avoid scratching glass and frames, as permanent damage can result. Trend® Windows & Doors will not be liable for any damage that may occur if the timber or aluminium painted surfaces come into contact with acid when cleaning brickwork.
3. Timber products **MUST BE** sealed (within one (1) month of delivery) with two coats of paint, varnish or sealer to both faces and edges including top and bottom. Exterior quality finishes in light reflective colours (not DARK colours) must be applied to all products exposed to direct sunlight or the elements.



contact

NEW SOUTH WALES

GIRRAWEEEN *National Head Office*

44-52 Mandoon Road
Girraween, NSW 2145
Tel: (02) 9840 2000
Fax: (02) 9840 2100

CHATSWOOD

3/384 Eastern Valley Way
Chatswood, NSW 2067
Tel: (02) 9882 1155
Fax: (02) 9882 1566

DUBBO

1/55 Douglas Mawson Drive
Dubbo, NSW 2830
Tel: (02) 6884 4055
Fax: (02) 6884 4057

NEWCASTLE

56-60 Munibung Road
Cardiff, NSW 2285
Tel: (02) 4956 7139
Fax: (02) 4956 9146

NOWRA

Unit 1A, 175 Princes Highway
South Nowra, NSW 2541
Tel: (02) 4423 1500
Fax: (02) 4423 5100

OURIMBAH (Fountaindale)

5 Catamaran Road
Ourimbah, NSW 2258
Tel: (02) 4389 1402
Fax: (02) 4389 8460

PORT MACQUARIE

35 Jindalee Road
Port Macquarie, NSW 2444
Tel: (02) 6581 5100
Fax: (02) 6581 4056

TAMWORTH

7-11 Hume Street
Tamworth, NSW 2340
Tel: (02) 6765 4066
Fax: (02) 6765 2584

WOLLONGONG

Tel: (02) 4256 1966
Fax: (02) 4256 3863

ACT

74 Sheppard Street
Hume, ACT 2620
Tel: (02) 6260 1266
Fax: (02) 6260 1381

ALBURY (Distributor)

Groundup Building Products
347 Cnr Townsend & Ebdon
Streets
Albury, NSW 2640
Tel: (02) 6021 444
Fax: (02) 6021 5955

TASMANIA (Distributor)

GP Glass
26 Loone Lane
Spreyton, TAS 7310
Tel: (03) 6427 3166
Fax: (03) 6427 3161

VICTORIA

BAYSWATER *Victorian Head Office*

92 Canterbury Road
Bayswater North, VIC 3153
Tel: (03) 9751 7000
Fax: (03) 9751 7010

HAWTHORN

192 Burwood Road
Hawthorn, VIC 3122
Tel: (03) 9214 4000
Fax: (03) 9214 4040

SEAFORD

Seaford, VIC 3198
Tel: (03) 9770 8888
Fax: (03) 9775 1811

BALLARAT

72-74 Main Road
Ballarat, VIC 3350
Tel: (03) 5338 7837
Fax: (03) 5331 3335

Geelong, VIC 3220
Mob: 0418 522 515
Fax: (03) 5261 4234

WARRNAMBOOL (Distributor)

Greene's Bricks & Windows
7 Robson Street
Warrnambool, VIC 3280
Tel: (03) 5561 6446
Fax: (03) 5561 6442

QUEENSLAND

ORMEAU *Queensland Head Office*

134 Lahrs Road
Ormeau, QLD 4208
Tel: (07) 5549 4100
Fax: (03) 5549 4111

COORPAROO

189 Cavendish Road
Coorparoo, QLD 4151
Tel: (07) 3394 2897
Fax: (07) 3397 0119

CABOOLTURE

27-43 Skyreach Street
Caboolture, QLD 4510
Tel: (07) 5428 9200
Fax: (07) 5428 9222

HERVEY BAY

6 Miller Street
Urangan, QLD 4655
Tel: (07) 4125 3188
Fax: (07) 4125 2188

SOUTH AUSTRALIA

15-17 Indama Street
Regency Park, SA 5010
Tel: (08) 8347 0866
Fax: (08) 8347 0522

PRODUCTS NOT AVAILABLE
IN WESTERN AUSTRALIA

Trend® National Customer Assistance Centre

(between 8:30am - 4:30pm EST, M-F)

13 72 74

www.trendwindows.com.au

email: info@trendwindows.com.au

