

**SENATOR**  
QUALITY TOOLING

**Dust Sheet -  
Cotton Twill**



Economy cotton twill provides excellent protection to carpets, flooring and furniture whilst decorating.

**Dimensions (L x W):** 6ft x 3ft.



**Dimensions  
(L x W)**  
6ft x 3ft

**Order Code**  
**SEN-533**  
**-7010K**

**KENNEDY**  
QUALITY INDUSTRIAL TOOLING

**Dust Sheets -  
Cotton Twill**



Tough cotton twill provides excellent protection to carpets, flooring and furniture when painting.



**Dimensions  
(L x W)**  
12ft x 9ft

**Order Code**  
**KEN-533**  
**-7000K**

**Dust Sheet - Polythene**

Disposable polythene dust sheet, thin polythene sheeting suitable for use once then thrown away.



**Dimensions  
(L x W)**  
12ft x 9ft

**Order Code**  
**SEN-533**  
**-7040K**

**Dust Sheet Roll - Polythene**

Disposable polythene dust sheet on a roll, suitable for staircases. Thin polythene sheeting suitable for use once then thrown away.



**Dimensions  
(L x W)**  
50m x 2m

**Order Code**  
**KEN-533**  
**-7060K**

**KENNEDY**  
QUALITY INDUSTRIAL TOOLING

**18 Piece Decorator's  
Painting Kit**

**Contents:**

- 2x 25mm industrial paint brush.
- 13, 50, 75 and 100mm industrial paint brushes.
- 240mm economy paint tray - plastic.
- 230mm wide birdcage (jumbo) paint roller.
- 230mm long pile polyester roller refill.
- 230mm medium pile polyester roller refill.
- 230mm wide foam paint roller refill.
- Long pile radiator roller complete.
- Long pile radiator roller refill.
- Metal telescopic handle.
- General-purpose masking tape 19mm x 50m and 50mm x 50m.
- 460mm canvas tool bag.
- Dustsheet.

**new**

**Order Code**  
**KEN-595**  
**-4140K**

**18  
PIECES**



**25 Piece Decorator's Preparation Kit**

**Contents:**

- 5x dust masks.
- 5x sheets grade 0 glass paper and grade 2 glass paper.
- 50 and 75mm half tang scraper.
- 38mm chisel point half tang putty knife.
- 200mm half tang combination shavehook.
- Window scraper.
- Sanding block - fine and medium.
- 310ml cartridge of decorators acrylic caulk.
- 310ml cartridge gun - plastic.
- 460mm canvas tool bag.

**new**

**Order Code**  
**KEN-595**  
**-4100K**

**25  
PIECES**



Made from high quality polypropylene and suitable for use with all types of paint, liquids, compounds, fasteners and fixings. Tapered design to allow stacking. Lids are sold separately. Supplied as standard with plastic handles (except \*).

| Capacity<br>(Litres) | Dia. x<br>Height (mm) | Order Code<br><b>KEN-533</b> |
|----------------------|-----------------------|------------------------------|
| 300ml*               | 89 x 66               | <b>-1540K</b>                |
| 500ml*               | 100 x 720             | <b>-1545K</b>                |
| 1ltr                 | 140 x 102             | <b>-1550K</b>                |
| 2.5ltr               | 198 x 134             | <b>-1560K</b>                |
| 5ltr                 | 235 x 205             | <b>-1564K</b>                |
| 10ltr                | 282 x 229             | <b>-1568K</b>                |
| 300ml                | Lid Only              | <b>-1570K</b>                |
| 500ml                | Lid Only              | <b>-1571K</b>                |
| 1ltr                 | Lid Only              | <b>-1573K</b>                |
| 2.5ltr               | Lid Only              | <b>-1575K</b>                |
| 5ltr                 | Lid Only              | <b>-1577K</b>                |
| 10ltr                | Lid Only              | <b>-1579K</b>                |



### Tile Nipper

For nibbling shapes in wall and floor tiles. Suitable for use on both ceramic wall and floor tiles. Drop forged steel handles and tungsten carbide tips.


**Capacity:** 6mm ( $\frac{1}{4}$ ").



| Size<br>(mm) | Weight<br>each | Order Code<br><b>KEN-558</b> |
|--------------|----------------|------------------------------|
| 200 (8")     | 345g           | <b>-8260K</b>                |

### **SENATOR** QUALITY TOOLING **Tile Cutting Pliers**

Tungsten carbide cutting wheel. The self-adjusting top jaw ensures a clean break. Suitable for use on ceramic tiles or glass.

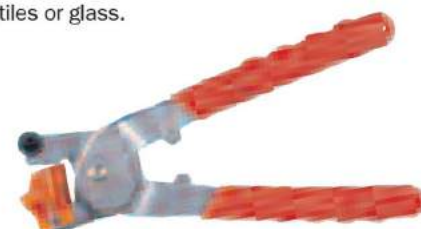

| Capacity<br>(mm)       | Weight<br>each | Order Code<br><b>SEN-533</b> |
|------------------------|----------------|------------------------------|
| 16 ( $\frac{5}{8}$ " ) | 250g           | <b>-2070K</b>                |
| Spare cutter           | 5g             | <b>-2170K</b>                |

### Contour Gauges

Allows profiles to be traced quickly and easily.



| Overall<br>Length (mm) | Weight<br>each | Order Code<br><b>KEN-533</b> |
|------------------------|----------------|------------------------------|
| 128 (5")               | 270g           | <b>-1960K</b>                |
| 255 (10")              | 500g           | <b>-1950K</b>                |

### Glass & Tile Cutter

Zinc alloy handle with a tungsten carbide cutting wheel.



| Overall<br>Length | Weight<br>each | Order Code<br><b>KEN-533</b> |
|-------------------|----------------|------------------------------|
| 130mm             | 45g            | <b>-1980K</b>                |

### Six Wheel Glass & Tile Cutter

Six wheel cutting head with tungsten carbide cutting wheels.



| Overall<br>Length | Weight<br>each | Order Code<br><b>KEN-533</b> |
|-------------------|----------------|------------------------------|
| 135mm             | 40g            | <b>-1990K</b>                |

### Tile Cutter/Scorer

Solid plastic handle with double-edged tungsten, extra hard, carbide cutting tip.



| Overall<br>Length | Weight<br>each | Order Code<br><b>KEN-533</b> |
|-------------------|----------------|------------------------------|
| 100mm             | 40g            | <b>-2050K</b>                |

## DECORATING TOOLS

**GROUP  
533**


Plastic paint kettles with steel wire handle. Inner lip has a 'V' cut to allow non-drip pouring.



| Capacity | Order Code<br><b>KEN-533</b> |
|----------|------------------------------|
| 1ltr     | <b>-1520K</b>                |
| 2.5ltr   | <b>-1530K</b>                |

### Grout & Adhesive Spreader

Non-scratch plastic spreader. The grooved edge ensures that the adhesive is evenly spread. The flexible edge is suitable for removing excess grout.



| Overall<br>Length | Weight<br>each | Order Code<br><b>KEN-533</b> |
|-------------------|----------------|------------------------------|
| 180mm             | 43g            | <b>-1960L</b>                |

### Tile Spacers

**Average pack quantity:** 250.



| Width | Weight<br>per pk | Order Code<br><b>KEN-533</b> |
|-------|------------------|------------------------------|
| 2mm   | 55g              | <b>-1940K</b>                |

### Grout Remover

Long life tempered steel blade. Grout can be loosened and removed quickly and easily, for repair, renewal or 'facelift'.



| Weight<br>each | Order Code<br><b>SEN-533</b> |
|----------------|------------------------------|
| 50g            | <b>-2090K</b>                |




GROUP  
**533**

## SCISSORS

**SENATOR**  
QUALITY TOOLING

### Paper Scissors

Non-twist blades manufactured from the finest quality stainless steel with plastic handles.

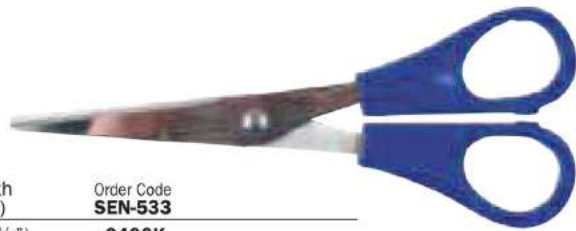

| Length<br>mm | Order Code<br><b>SEN-533</b> |
|--------------|------------------------------|
| 140 (5½")    | <b>-0400K</b>                |

### General Purpose Household Scissors

Hardened and ground steel blades with asymmetrical plastic handles.



| Length<br>mm | Order Code<br><b>SEN-533</b> |
|--------------|------------------------------|
| 180 (7")     | <b>-0410K</b>                |
| 215 (8½")    | <b>-0420K</b>                |
| 255 (10")    | <b>-0430K</b>                |

### Kitchen Scissors - Offset Handle

The asymmetrical plastic handle design allows the scissors to be used comfortably just above the work surface when cutting cloth in a straight line. The straight and curved blade tips are suitable for both long cuts and precise stitch cutting. Hardened and ground steel blades.



| Length<br>mm | Order Code<br><b>SEN-533</b> |
|--------------|------------------------------|
| 115 (4½")    | <b>-0480K</b>                |
| 180 (7")     | <b>-0490K</b>                |
| 210 (8¼")    | <b>-0500K</b>                |

**KENNEDY**  
QUALITY INDUSTRIAL TOOLING

### Heavy-Duty General Purpose Scissors

Large red loop handles.



| Length<br>mm | Order Code<br><b>KEN-533</b> |
|--------------|------------------------------|
| 205 (8")     | <b>-3880K</b>                |

**KENNEDY**  
QUALITY INDUSTRIAL TOOLING

### Paper Scissors



Non-twist blades manufactured from the finest quality stainless steel with plastic handles.

**Set contents:** 160mm and 180mm.



| Length<br>mm | Order Code<br><b>KEN-533</b> |
|--------------|------------------------------|
| 160 (6¼")    | <b>-3800K</b>                |
| 180 (7")     | <b>-3810K</b>                |

### 2 Piece Paper Scissor Set

160mm and 180mm paper scissors.

**2  
PIECES**



| Weight<br>each | Order Code<br><b>KEN-533</b> |
|----------------|------------------------------|
| 320g           | <b>-3850K</b>                |

### 3 Piece Scissor Set

190mm kitchen, 205mm heavy-duty and 215mm household.

**3  
PIECES**



| Weight<br>each | Order Code<br><b>KEN-533</b> |
|----------------|------------------------------|
| 240g           | <b>-3700K</b>                |

### 4 Piece General-Purpose Scissor Set

215mm tailors, 215mm kitchen, 170mm paper and 125mm thread cutting.

**4  
PIECES**



| Weight<br>each | Order Code<br><b>KEN-533</b> |
|----------------|------------------------------|
| 320g           | <b>-3720K</b>                |



**Plastic Handled**

The asymmetrical plastic handle design allows the scissors to be used comfortably just above the work surface when cutting cloth in a straight line. The straight and curved blade tips are suitable for both long cuts and precise stitch cutting.



| Length<br>mm | Order Code<br>KEN-533 |
|--------------|-----------------------|
| 215 (8½")    | -3380K                |
| 240 (9½")    | -3390K                |

**Tailor's Thread Cutting Snips**
**Plastic Handled**

Handy, economical lightweight plastic snips with finger hole for stability. Replaceable stainless steel blades (uses Kennedy 533-375 blades). Useful for cutting threads, wires, string, plastic pull straps etc.



| Length<br>(mm) | Order Code<br>KEN-533 |
|----------------|-----------------------|
| 125 (5")       | -3750K                |

**Bi-Material Side Bent Scissors**

The asymmetrical plastic handle design with hardened and ground steel blades allows the scissors to be used comfortably just above the work surface when cutting cloth in a straight line. The straight and curved blade tips are suitable for both long cuts and precise stitch cutting. Sharp stainless steel blades.



| Length<br>mm | Order Code<br>KEN-533 |
|--------------|-----------------------|
| 240 (9½")    | -3780K                |

**Multi-Purpose Shears**

High strength reinforced offset steel blades with serrated cutting edge. Suitable for moderate to heavy cutting applications.



| Length<br>(mm) | Weight<br>each | Order Code<br>KEN-533 |
|----------------|----------------|-----------------------|
| 180 (7")       | 60g            | -2370K                |

**Bi-Material Handled  
Slimline Scissors**

Ideal for fine and intricate detailed work.



| Length<br>mm | Order Code<br>KEN-533 |
|--------------|-----------------------|
| 140 (5½")    | -3920K                |
| 165 (6½")    | -3930K                |

**Bi-Material Handled Offset  
Scissors**

The asymmetrical Bi-material comfort handle design with hardened and ground steel blades allows the scissors to be used comfortably just above the work surface when cutting cloth in a straight line. The straight and curved blade tips are suitable for both long cuts and precise stitch cutting. Sharp stainless steel blades.



| Length<br>mm | Order Code<br>KEN-533 |
|--------------|-----------------------|
| 190 (7½")    | -3940K                |
| 215 (8½")    | -3950K                |
| 245 (9¾")    | -3960K                |

**Bi-Material Grip Scissors Set**
**Contents:**

Slimline Scissors: 140mm and 165mm  
Offset Scissors: 190mm, 215mm and 245mm


**5  
PIECES**

| Order Code<br>KEN-533 |
|-----------------------|
| -3900K                |

**SCISSORS**
**GROUP  
533**
**General-Purpose Shears**

Traditional pattern stainless steel scissors with high polished finish. Asymmetrical handle design for

improved user comfort and control.

| Length<br>(mm) | Weight<br>each | Order Code<br>KEN-533 |
|----------------|----------------|-----------------------|
| 150 (6")       | 80g            | -2260K                |
| 180 (7")       | 130g           | -2270K                |

**Paper Hanging Shears**

All metal, with stainless steel blades to produce perfect cuts.



| Length<br>(mm) | Weight<br>each | Order Code<br>KEN-533 |
|----------------|----------------|-----------------------|
| 255 (10")      | 270g           | -2200K                |

**Sidebent Shears**

Stainless steel blades, large loop comfortable handles. For trimming.



| Length<br>(mm) | Weight<br>each | Order Code<br>KEN-533 |
|----------------|----------------|-----------------------|
| 180 (7")       | 190g           | -2070K                |
| 205 (8")       | 190g           | -2080K                |
| 230 (9")       | 280g           | -2090K                |
| 255 (10")      | 440g           | -2100K                |
| 305 (12")      | 720g           | -2120K                |

**Fibre Optic Cutters**
**FOC145**

Designed for cutting fibre optics, KEVLAR materials, plastic canvas, upholstery, headlines, cloth, fabric, string and many more. Lightweight and easy to use for both right and left handed users. Easy reach thumb lock. Long lasting precision ground hardened high carbon alloy steel with molybdenum and vanadium blades. Serrated bladereduces slippage.

**Overall length:** 145mm (5").  
**Cutting length:** 32mm (1").

| Weight<br>each | Order Code<br>KEN-533 |
|----------------|-----------------------|
| 82g            | -3570K                |

**Fibre Optic Shears**
**FOC160**

Designed for cutting fibre optics, KEVLAR materials, plastic canvas, upholstery, headlines, cloth, fabric, string and many more. Long lasting precision ground hardened high carbon alloy steel with Molybdenum and Vanadium blades. Serrated blade reduces slippage. Adjustable pivot point adjusts the tension between the blades. Extended tang for durability.

**Overall length:** 160mm  
**Cutting length:** 42mm.

| Weight<br>each | Order Code<br>KEN-533 |
|----------------|-----------------------|
| 82g            | -3580K                |



Manufactured from chrome vanadium steel with hardened parallel opening jaws that are ground and polished, laser etched with metric graduations for rapid repeatable reference setting. The wide grooved profile of the opening mechanism and coarsely knurled adjusting screw ensures smooth adjustment. Fully insulated, conforms to **EN 60900:2012** standards for safe electrical applications up to 1000V.




| Overall Length | Capacity | Weight each | Order Code<br>KEN-534 |
|----------------|----------|-------------|-----------------------|
| 200mm          | 24mm     | 336g        | -6080K                |
| 250mm          | 30mm     | 551g        | -6100K                |
| 300mm          | 34mm     | 870g        | -6120K                |

### Insulated Spanners


Chrome vanadium single ended open jaw spanners. Spanner dimensions conform to **DIN 7446**. Fully insulated to conform to **VDE 0680/201** and **EN 60900:2012** standards for safe electrical applications up to 1000V.

#### Single End Open Jaw



| Size | Weight each | Order Code<br>KEN-534 |
|------|-------------|-----------------------|
| 10mm | 30g         | -8800K                |
| 11mm | 45g         | -8810K                |
| 12mm | 60g         | -8820K                |
| 13mm | 60g         | -8830K                |
| 14mm | 70g         | -8840K                |
| 15mm | 85g         | -8850K                |
| 16mm | 115g        | -8860K                |
| 17mm | 110g        | -8870K                |
| 18mm | 135g        | -8880K                |
| 19mm | 150g        | -8890K                |
| 21mm | 205g        | -8910K                |
| 24mm | 250g        | -8940K                |


### Insulated Single End Ring Spanners



| Size | Weight each | Order Code<br>KEN-534 |
|------|-------------|-----------------------|
| 10mm | 85g         | -9200K                |
| 11mm | 110g        | -9210K                |
| 12mm | 120g        | -9220K                |
| 13mm | 125g        | -9230K                |
| 14mm | 175g        | -9240K                |
| 15mm | 135g        | -9250K                |
| 16mm | 175g        | -9260K                |
| 17mm | 190g        | -9270K                |
| 18mm | 220g        | -9280K                |
| 19mm | 250g        | -9290K                |
| 21mm | 310g        | -9310K                |
| 22mm | 325g        | -9320K                |
| 24mm | 340g        | -9340K                |

### Insulated Hacksaw

Die cast frame with 'D' style handle for user comfort and control. Wing nut blade tensioning. Supplied complete with 300mm 24tpi blade. Fully insulated, conforms to **EN 60900:2012** standards for safe electrical applications up to 1000V.

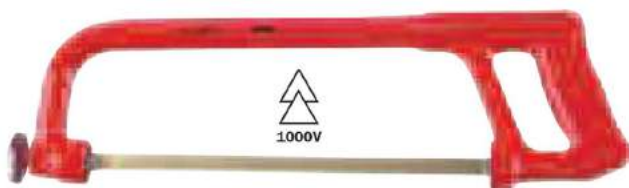

| Overall Length | Weight each | Order Code<br>KEN-534 |
|----------------|-------------|-----------------------|
| 400mm          | 619g        | -0800K                |

### Insulated Pump/Box Joint Pliers

Hardened chromed steel jaws. Sliding pivot joint allows the widest range of jaw openings. Serrated jaws for gripping flat and round parts. The handles cannot be closed together, preventing trapped fingers.



Fully insulated, conforms to **EN 60900:2012** standards for safe electrical applications up to 1000V.



| Overall Length | Weight each | Order Code<br>KEN-534 |
|----------------|-------------|-----------------------|
| 240mm          | 55g         | -4860K                |

### Insulated Tweezers

Straight/bent pattern tweezers with serrated gripping surfaces, quality tested and insulated to 1000V AC.

Conforms to **EN 60900:2012** standards.

Overall length: 145mm. Exposed blade length: 15mm.



#### Straight Pattern



#### Bent Pattern



| Overall Length | Type     | Weight each | Order Code<br>KEN-534 |
|----------------|----------|-------------|-----------------------|
| 145mm          | Straight | 40g         | -1120K                |
| 145mm          | Bent     | 40g         | -1140K                |

### Insulated Junior Hacksaw

Quality tested and insulated to 1000V AC and 1500V DC for live line working. All insulation is moulded in one piece, thus avoiding possible air gaps or other potential hazards. Uses conventional junior hacksaw blades. **EN 60900:2012**.



| Overall Length | Weight each | Order Code<br>KEN-534 |
|----------------|-------------|-----------------------|
| 150mm (6")     | 264g        | -0600K                |



Fully insulated to conform to **VDE 0680/201** and **EN 60900:2012** standards for safe electrical applications up to 1000V.

**Curved Blade**

Steel hook blade for splitting flat and ribbon cables along its length.


**Straight Blade**

Fixed straight blade and protection cap. **Blade length:** 45mm.



| Overall Length | Type     | Weight each | Order Code KEN-534 |
|----------------|----------|-------------|--------------------|
| 180mm          | Curved   | 65g         | -3480K             |
| 180mm          | Straight | 65g         | -3500K             |

**Insulated Dismantling  
Cable Knife**

Insulated dismantling cable knife complete with protection cap. Quality tested to 1000V AC. Comfortable handle, fixed sickle shaped blade for cutting sector cables. Conforms to **VDE 0680/201** and **EN 60900:2012** standards.

**Blade length:** 45mm.



| Overall Length | Weight each | Order Code KEN-534 |
|----------------|-------------|--------------------|
| 180mm          | 70g         | -3540K             |

**Insulated Sockets & Accessories**

All products are quality tested and fully insulated to 1000V AC. Conforms to **VDE 0680/201** (except extension bars) and **EN 60900:2012** standards. All 1/2" square drive.

**Insulated Reversible Ratchet Handle**


| Weight each | Order Code KEN-534 |
|-------------|--------------------|
| 660g        | -7400K             |

**200mm Insulated T-Handle**


| Weight each | Order Code KEN-534 |
|-------------|--------------------|
| 450g        | -7420K             |

**INSULATED SERVICE TOOLS**
**GROUP  
534**
**Insulated Ratcheting Cable Cutter**

For copper and aluminium cables up to 32mm diameter. Lightweight steel handles with insulated vinyl hand grips. Fixed and moving blade made from high grade alloy steel. Combines lightweight and ratcheted mechanical advantage in its circular cutting motion. Quality tested **EN 60900:2012** and insulated to 1000V AC.



| Overall Length | Weight each | Order Code KEN-534 |
|----------------|-------------|--------------------|
| 250mm (10")    | 678g        | -5000K             |

**Insulated Cable Cutters**

Manufactured from drop forged high carbon steel with induction hardened blades. Fully insulated to conform with **VDE 0680/201** and **EN 60900:2012** standards for safe electrical applications up to 1000V.



| Overall Length | Capacity | Weight each | Order Code KEN-534 |
|----------------|----------|-------------|--------------------|
| 240mm          | 22mm     | 398g        | -4960K             |

**125 & 250mm Insulated Extension Bars**


| Description         | Weight each | Order Code KEN-534 |
|---------------------|-------------|--------------------|
| 125mm Extension Bar | 200g        | -7440K             |
| 250mm Extension Bar | 270g        | -7460K             |

**Insulated Single Hexagon Sockets**


| Type           | Size | Overall Length | Weight each | Order Code KEN-534 |
|----------------|------|----------------|-------------|--------------------|
| Metric<br>1/2" | 10mm | 37             | 60g         | -7500K             |
|                | 11mm | 37             | 60g         | -7510K             |
|                | 12mm | 37             | 60g         | -7520K             |
|                | 13mm | 37             | 70g         | -7530K             |
|                | 14mm | 37             | 60g         | -7540K             |
|                | 15mm | 37             | 60g         | -7550K             |
|                | 16mm | 37             | 70g         | -7560K             |
|                | 17mm | 37             | 80g         | -7570K             |
|                | 18mm | 37             | 90g         | -7580K             |
|                | 19mm | 37             | 90g         | -7590K             |
|                | 20mm | 37             | 100g        | -7600K             |
|                | 21mm | 37             | 95g         | -7610K             |
|                | 22mm | 37             | 105g        | -7620K             |
|                | 24mm | 37             | 135g        | -7640K             |

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**



A fully insulated screwdriver VDE tested up to 1000V. Professional high grip handles, magnetic tips, chrome vanadium steel blades.



#### Crosspoint

Crosspoint screws virtually eliminate the screwdriver slippage if the correct size is used. The No.2 driver is suitable for most applications.



| Tip Size | Blade Length | Weight each | Order Code |
|----------|--------------|-------------|------------|
| No.0     | 60mm         | 20g         | -7900K     |
| No.1     | 80mm         | 60g         | -7910K     |
| No.2     | 100mm        | 90g         | -7920K     |

#### Parallel Tip

Slotted head screws are the most commonly used screw. To safely drive these screws, the tip of the screwdriver should be of the same width as the slot in the screw head and fill it as well, to minimise slipping and deforming the screw head.



| Tip Size | Blade Length | Weight each | Order Code |
|----------|--------------|-------------|------------|
| 2.5mm    | 75mm         | 20g         | -7940K     |
| 4.0mm    | 100mm        | 60g         | -7950K     |
| 5.5mm    | 125mm        | 75g         | -7960K     |
| 6.5mm    | 150mm        | 110g        | -7970K     |

#### Set Contents:



2.5 x 75,  
4.0 x 100,  
5.5 x 125,  
6.5 x 150mm.



No.0 x 60,  
No.1 x 80,  
No.2 x 100mm.

**7  
PIECES**

Weight each  
715g

Order Code  
KEN-572  
-8000K



### Electrician's VDE Square Section Handle Screwdrivers

Volt-tested to ensure safety on or near electrical equipment up to 1000V AC or 1500V DC. Insulated blades with magnetic tips. Conform with DIN 7438 and DIN EN 60900.



#### Crosspoint

Crosspoint screws virtually eliminate the screwdriver slippage if the correct size is used. The No.2 driver is suitable for most applications.



| Tip Size | Blade Length | Weight each | Order Code |
|----------|--------------|-------------|------------|
| No.0     | 75mm         | 27g         | -5820K     |
| No.1     | 100mm        | 50g         | -5830K     |
| No.2     | 100mm        | 80g         | -5840K     |

#### Parallel Tip

Slotted head screws are the most commonly used screw. The tip of the screwdriver should be of the same width as the slot in the screw head and fill it as well, to minimise slipping.



| Tip Size | Blade Length | Weight each | Order Code |
|----------|--------------|-------------|------------|
| 2.5mm    | 85mm         | 30g         | -5760K     |
| 4.0mm    | 100mm        | 45g         | -5780K     |
| 5.5mm    | 125mm        | 80g         | -5790K     |
| 6.5mm    | 150mm        | 100g        | -5800K     |

#### Set Contents:

Supplied in clear plastic wallet.



2.5 x 85,  
4.0 x 100,  
5.5 x 125,  
6.5 x 150mm.



No.0 x 75,  
No.1 x 100,  
No.2 x 100mm.

**7  
PIECES**

Weight each  
495g

Order Code  
KEN-572  
-5900K



### Insulated Interchangeable Screwdriver Set

Ergonomic, insulated, full size handle, swivel cap and eight interchangeable drivers supplied in a compact protective pouch with belt loop. 2-in-1 design, use the detachable swivel cap for fast (low torque) driving, or use the full size detachable ergonomic handle for higher torque fastening. Safe up to 1000V AC/1500V DC.

#### Contents (mm):



0.4 x 2.5 x 100mm,  
0.5 x 3.0 x 100mm,  
0.8 x 4.0 x 100mm,  
1.0 x 5.5 x 100mm and  
1.2 x 6.5 x 100mm.



No.0 x 100mm,  
No.1 x 100mm and  
No.2 x 100mm.

**10  
PIECES**



Weight each  
365g

Order Code  
KEN-572  
-5870K






## Pro-Torq Insulated Pliers

Especially suitable for production line environments where repetitive work is undertaken. Double polished head and joint with induction hardened cutting edges.

### Insulated End Wire Strippers

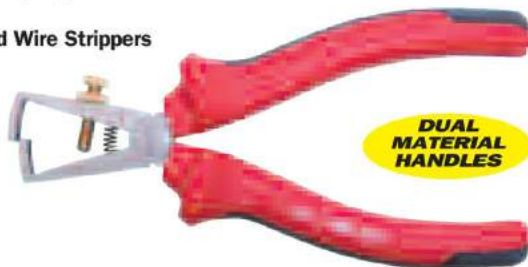

1000V AC

VDC/IEC 900  
DIN EN 60900

| Overall Length                           | Weight each | Order Code                      |
|--|-------------|---------------------------------|
| 160mm (6 <sup>3</sup> / <sub>8</sub> "*) | 199g        | <b>KEN-558</b><br><b>-5200K</b> |

### Insulated Diagonal Cutting Nippers



| Overall Length                           | Weight each | Order Code                      |
|--|-------------|---------------------------------|
| 145mm (5 <sup>3</sup> / <sub>4</sub> "*) | 215g        | <b>KEN-558</b><br><b>-5080K</b> |
| 160mm (6 <sup>3</sup> / <sub>8</sub> "*) | 205g        | <b>-5100K</b>                   |
| 205mm (8"*)                              | 262g        | <b>-5120K</b>                   |

## INSULATED SERVICE TOOLS

GROUP  
**534**

### Insulated Snipe Nose Pliers




\* Bent nose



| Overall Length                           | Weight each | Order Code                      |
|--|-------------|---------------------------------|
| 160mm (6 <sup>3</sup> / <sub>8</sub> "*) | 157g        | <b>KEN-558</b><br><b>-5020K</b> |
| 205mm (8"*)                              | 221g        | <b>-5040K</b>                   |
| 205mm (8"*)*                             | 212g        | <b>-5060K</b>                   |

### Insulated Combination Pliers

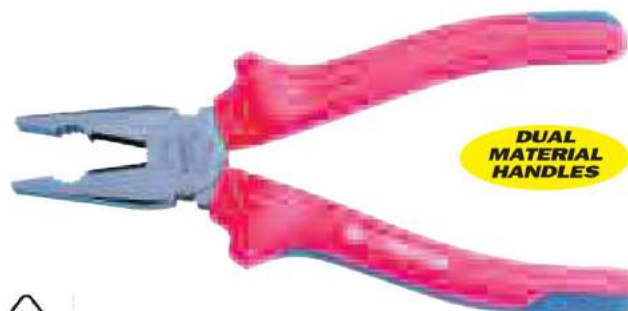

| Overall Length                           | Weight each | Order Code                      |
|--|-------------|---------------------------------|
| 160mm (6 <sup>3</sup> / <sub>8</sub> "*) | 226g        | <b>KEN-558</b><br><b>-5140K</b> |
| 180mm (7"*)                              | 290g        | <b>-5160K</b>                   |
| 205mm (8"*)                              | 344g        | <b>-5180K</b>                   |

## 16-Piece Electrician's VDE Tool Bag & Kit

Heavy-duty tear-resistant tool bag with velcro fastening flap. Double-webbed shoulder strap fixed with metal release clasps. Two removable tool boards inside which have a unique tool storage securing system built-in. All tools are VDE approved.

### Contents:

Electrician's tool bag (320 x 340 x 125mm).  
150mm euro tester will detect 'live' electricity supply.  
Suitable for AC to 125 - 250V.  
3mm wide tip. Conform to VDE 0630 Part 4.  
145mm (5<sup>3</sup>/<sub>4</sub>"\*) Pro-Torq grip diagonal nipper 1000V insulated.  
160mm (6<sup>3</sup>/<sub>8</sub>"\*) Pro-Torq snipe nose plier 1000V insulated.  
165mm (6<sup>1</sup>/<sub>2</sub>"\*) Pro-Torq engineers' combination plier 1000V insulated. 170mm (6<sup>3</sup>/<sub>4</sub>"\*) Pro-Torq wire stripper 1000V insulated.  
7-pce VDE dual grip screwdriver set:  
No.0 x 60, No.1 x 80 and No.2 x 100mm,  
2.5 x 75, 4.0 x 100, 5.5 x 125 and 6.5 x 150mm.  
180mm (7"\*) insulated cable knife, curved blade.  
2x small parts storage boxes.



**16  
PIECES**

| Width (mm) | Depth (mm) | Height (mm) | Weight each | Order Code                      |
|------------|------------|-------------|-------------|---------------------------------|
| 320        | 125        | 340         | 3.50kg      | <b>KEN-595</b><br><b>-3400K</b> |

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**



Blades are reverse printed and have a nylon coating for extra life. The double-sided marking makes all the difference when measuring ceilings and window reveal etc. All come with an automatic brake which locks the blade in position during use until you press the release control button. They also benefit from a sliding magnetic hook and belt clip.



Double  
Sided  
Blades




| Blade Length | Blade Width | Order Code    |
|--------------|-------------|---------------|
| 3m           | 16mm        | <b>-1730K</b> |
| 5m           | 25mm        | <b>-1750K</b> |
| 3m/10'       | 16mm        | <b>-1830K</b> |
| 5m/16'       | 25mm        | <b>-1850K</b> |
| 8m/26'       | 25mm        | <b>-1880K</b> |

## YAMOTO Rubber Grip Tape Measures

### 'Dynamic Grip'

Textured rubber non-slip grip case for improved comfort and impact resistance. Locking spring assisted blade return. Rivetted metal end hook. Steel belt clip and wrist strap. Action lock holds the blade precisely where you want it. Blades and hooks are heavy gauge and corrosion resistant, designed for industrial use. Self-aligning hooks ensure accuracy for internal and external measurements.



5m and longer tape hooks have four rivets (3m/10' tape hooks have two). Metric/English blades have  $\frac{1}{32}$ ",  $\frac{1}{16}$ " inch and mm graduations. Metric-only blades have mm and cm graduations.

| Blade Length | Blade Width | Order Code    |
|--------------|-------------|---------------|
| 3m           | 16mm        | <b>-1440K</b> |
| 5m           | 19mm        | <b>-1460K</b> |
| 8m           | 25mm        | <b>-1490K</b> |
| 3m/10'       | 16mm        | <b>-1430K</b> |
| 5m/16'       | 19mm        | <b>-1450K</b> |
| 7.5m/25'     | 25mm        | <b>-1480K</b> |
| 10m/33'      | 25mm        | <b>-1500K</b> |

With spring blade return. Self-adjusting hook for internal and external reading. Metric and inch readings. ABS casing. End hook has two rivets, graduated with  $\frac{1}{32}$ ",  $\frac{1}{16}$ " and mm.



| Blade Length | Blade Width | Order Code    |
|--------------|-------------|---------------|
| 2m/6'        | 13mm        | <b>-1130K</b> |
| 3m/10'       | 13mm        | <b>-1140K</b> |

## Locking Tape Measures

Tough plastic case with a slide action blade lock. Locking spring assisted blade return. Rivetted metal end hook. Steel belt clip and wrist strap. Action lock holds the blade precisely where you want it. Blades and hooks are heavy gauge and corrosion-resistant. Self-aligning hooks ensure accuracy for internal and external measurements. 5m and longer tape hooks have four rivets (3m/10' tape hooks have two).

### Chrome Cased



| Blade Length                    | Blade Width | Weight each | Order Code     |
|---------------------------------|-------------|-------------|----------------|
|                                 |             |             | <b>SEN-536</b> |
| <b>Metric Only Blades</b>       |             |             |                |
| 3m                              | 16mm        | 130g        | <b>-6040K</b>  |
| 5m                              | 19mm        | 210g        | <b>-6060K</b>  |
| <b>Metric &amp; Inch Blades</b> |             |             |                |
| 3m/10'                          | 16mm        | 115g        | <b>-6030K</b>  |
| 5m/16'                          | 19mm        | 200g        | <b>-6050K</b>  |
| 8m/25'                          | 25mm        | 365g        | <b>-6080K</b>  |

### Hi-Vis Cased



| Blade Length                    | Blade Width | Weight each | Order Code     |
|---------------------------------|-------------|-------------|----------------|
|                                 |             |             | <b>SEN-536</b> |
| <b>Metric Only Blades</b>       |             |             |                |
| 3m                              | 16mm        | 125g        | <b>-1440K</b>  |
| 5m                              | 19mm        | 195g        | <b>-1460K</b>  |
| <b>Metric &amp; Inch Blades</b> |             |             |                |
| 3m/10'                          | 16mm        | 130g        | <b>-1430K</b>  |
| 5m/16'                          | 19mm        | 215g        | <b>-1450K</b>  |
| 7.5m/25'                        | 25mm        | 365g        | <b>-1480K</b>  |
| 10m/33'                         | 25mm        | 470g        | <b>-1500K</b>  |



**KENNEDY**  
QUALITY INDUSTRIAL TOOLING

**Steel Tape Measures**

Non-reflective steel tape with nylon coated blade for maximum durability. The tape is housed in a high impact ABS plastic case with flush winding handle and belt clip. For ease of use, the tape is finished off with a handy plastic loop and metal end hook.



| Blade Length | Order Code    |
|--------------|---------------|
| 20m/66'      | <b>-3720K</b> |
| 30m/100'     | <b>-3740K</b> |

**SENATOR**  
QUALITY TOOLING

**Fibreglass Tape Measures**

A high tensile strength fibreglass blade that is both water- and corrosion-proof. It has an easy to read dual scale (metric and imperial), reinforced blade tip and metal end claw. The tape is presented in an impact resistant ABS plastic case with flush fitting winding handle and convenient strap handle.



| Blade Length | Blade Width | Order Code    |
|--------------|-------------|---------------|
| 10m/33'      | 9.5mm       | <b>-2420K</b> |
| 20m/66'      | 9.5mm       | <b>-2440K</b> |
| 30m/100'     | 9.5mm       | <b>-2460K</b> |

**TAPE MEASURES**

**Surveyor's Fibreglass Tape Measures**

A high tensile strength fibreglass tape that will never kink or rust. It is white on one side and yellow on the other to help prevent twisting and the blade is double-coated to protect the markings which feature both metric and imperial measurements. Housed in a robust ABS open frame with folding end claw and large D type handle with rubber insert for a comfort grip. It also has a quick, 2x fast retraction function and marking spike.



| Blade Length | Order Code    |
|--------------|---------------|
| 50m/165'     | <b>-3960K</b> |
| 100m/330'    | <b>-3990K</b> |

**Metric Measuring Wheel**

Robust, lightweight design with impact-resistant wheel and patented gear transmission structure with weather-resistant housing. Folding aluminium handle automatically 'clicks' into extended position. Five digit counter. 2 reset buttons. Spring loaded kickstand. 'Exact Point' indicator. Trigger operated brake. Supplied with carry case.



| Wheel Diameter | Length (Extended/Folded) | Weight each | Order Code    |
|----------------|--------------------------|-------------|---------------|
| 319mm          | 995/505mm                | 1.96kg      | <b>-9010K</b> |

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**



**GROUP 537 KNIVES**

**SENATOR QUALITY TOOLING Locking Knife**

With rosewood handle. Stainless steel blade and brass fittings.



| Blade Length | Weight each | Order Code           |
|--------------|-------------|----------------------|
| 3"           | 160g        | <b>SEN-537-1200K</b> |
| 4"           | 170g        | <b>-1300K</b>        |

**YAMOTO Folding Pocket Knife**

Zinc die cast body. For all general-purpose cutting and trimming applications.

**Body length:** 100mm.

**Open length:** 135mm. Spring blade mechanism automatically locks the blade in open or closed position. Two blades can be stored in the body. Can be fitted to key ring.



| Overall Length | Weight each | Order Code           |
|----------------|-------------|----------------------|
| 135mm          | 84g         | <b>YMT-537-1500K</b> |

**Folding Pocket Knife Blades**

**Spare Knife Blades**

Pack of five blades to suit (YMT-537-1500K) folding knife.



| Pack Quantity | Weight each | Order Code           |
|---------------|-------------|----------------------|
| 5             | 22g         | <b>YMT-537-1520K</b> |
| 50            | 22g         | <b>-1530K</b>        |

**AVON Carton Opener**

For cutting through loading straps, extracting staples and slitting tape without damaging the contents. In-handle blade storage. Spring loaded blade guard, retractable slitting blade, complete with spare blade.



| Overall Length | Order Code           |
|----------------|----------------------|
| 190mm          | <b>AVN-537-0030K</b> |

**2-Blade Pocket Knife**

With traditional style rosewood handle. Stainless steel blade and brass fittings.



| Blade Length | Weight each | Order Code           |
|--------------|-------------|----------------------|
| 2"           | 95g         | <b>SEN-537-1000K</b> |

**AVON Cutting Safety Knife**

High impact plastic handle with enclosed blade to ensure maximum user safety. Suitable for left and right handed users.



| Overall Length | Order Code           |
|----------------|----------------------|
| 154mm          | <b>AVN-537-0020K</b> |

**Fish 2000 Safety Knife**

The Avon™ Fish 2000 safety knife has an enclosed blade within a 4.7mm gap and an auto-retracting hook blade, to ensure maximum user safety and to reduce accidental damage to the product in the carton being opened. It is suitable for both left and right-handed users.



| Overall Length | Weight each | Order Code           |
|----------------|-------------|----------------------|
| 155mm          | 50g         | <b>AVN-537-0010K</b> |

**SENATOR QUALITY TOOLING Carton & Strap Cutter**

For use on carton tape and plastic strapping. The blade is partially exposed to prevent accidental cuts.



| Overall Length | Weight each | Order Code           |
|----------------|-------------|----------------------|
| 80mm           | 10g         | <b>SEN-537-2000K</b> |



A range of knives with contoured moulded grips and steel slides that prevent blade slippage or case splitting and gives the knife a smooth action. Snap-off blade knives have a blade locking mechanism in the thumb slide. Replacement blades available on request.

**Snap-off Blade**

8 segment, 18mm heavy duty.



| Overall Length | Weight each | Order Code                      |
|----------------|-------------|---------------------------------|
| 130mm          | 60g         | <b>SEN-537</b><br><b>-0330K</b> |

**Snap-off Blade**  
 13 segment,  
 9mm standard.


| Overall Length | Weight each | Order Code                      |
|----------------|-------------|---------------------------------|
| 130mm          | 60g         | <b>SEN-537</b><br><b>-0430K</b> |

**Snap-off Blade Knife**

8 segment, 18mm economy.



| Overall Length | Weight each | Order Code                      |
|----------------|-------------|---------------------------------|
| 130mm          | 60g         | <b>SEN-537</b><br><b>-0410K</b> |

**YAMOTO** **Trimming  
Knives**

Turn anti-clockwise to unlock. Turn continuously to disassemble for blade change.


**-4650K**

**-4620K**

| Number of Segments | Order Code                      |
|--------------------|---------------------------------|
| 13                 | <b>YMT-537</b><br><b>-4650K</b> |
| 8                  | <b>-4620K</b>                   |

**KENNEDY** **Snap-off  
Knife Blades**

Kennedy Industrial quality knife blades have a superior edge hardening for longer tool life and sharper edge. Best value with longer working between blade changes and with easy, safe segment-snap to renew leading edge.

**18 x 100mm - 8 segment**

**9 x 55mm - 7 segment**

**9 x 91mm - 13 segments**


| Overall Length | Pack Quantity | Weight each | Order Code                      |
|----------------|---------------|-------------|---------------------------------|
| 18 x 100       | 10            | 72g         | <b>KEN-537</b><br><b>-2050K</b> |
|                | 100           | 73g         | <b>-2060K</b>                   |
| 9 x 55         | 100           | 143g        | <b>-2020K</b>                   |
|                | 10            | 23g         | <b>-2110K</b>                   |
| 9 x 91         | 100           | 108g        | <b>-2120K</b>                   |

ABS plastic with rubber coating for extra grip, steel blade slides which prevent blade slippage or case splitting and gives the knife a smooth action. Snap off blade. Unique spring loaded automatic blade replacement.

**-0720K**

**-0740K**


| Overall Length | Blade Segments | Weight each | Order Code                      |
|----------------|----------------|-------------|---------------------------------|
| 140mm          | 13             | 65g         | <b>KEN-537</b><br><b>-0720K</b> |
| 170mm          | 8              | 165g        | <b>-0740K</b>                   |

**Snap-off Blade Retractable Knives**

High strength ABS plastic construction with slider lock.

**Mini:** 140mm, 9 x 91mm, 13 segment blade.

**-0310K**


**Standard:** 160mm, 18 x 100mm, 8 segment blade.

**-0350K**


| Overall Length | Weight each | Order Code                      |
|----------------|-------------|---------------------------------|
| 140mm          | 32g         | <b>KEN-537</b><br><b>-0310K</b> |
| 160mm          | 86g         | <b>-0350K</b>                   |

**Mini:** 9 x 91mm, 13 segment blade.



| Overall Length | Weight each | Order Code                      |
|----------------|-------------|---------------------------------|
| 130mm          | 21g         | <b>KEN-537</b><br><b>-0290K</b> |

**Standard:** 18 x 100mm, 8 segment blade.



| Overall Length | Weight each | Order Code                      |
|----------------|-------------|---------------------------------|
| 160mm          | 38g         | <b>KEN-537</b><br><b>-0370K</b> |

**Ultra Slim**

Precision knife. Black coated. 13 segment, blade 9 x 91mm.



| Overall Length | Weight each | Order Code                      |
|----------------|-------------|---------------------------------|
| 130mm          | 20g         | <b>KEN-537</b><br><b>-0250K</b> |

**Micro Knife**

9 x 55mm, 8 segment blade, without slider lock.



| Overall Length | Weight each | Order Code                      |
|----------------|-------------|---------------------------------|
| 80mm           | 70g         | <b>KEN-537</b><br><b>-0200K</b> |



**GROUP 537 KNIVES**

**KENNEDY Automatic Retractable Safety Knife**

Combined safety knife and strap/tape cutter. Features auto retractable blade and quick blade release, together with bi-material comfort grip. Accepts medium, heavy duty and hook blades.



|                 |                |
|-----------------|----------------|
| Product Number  | Order Code     |
| SX1212          | <b>KEN-537</b> |
| Blades (Pack 3) | <b>-0780K</b>  |
|                 | <b>-7610K</b>  |

**Hercules Pattern Trimming Knife**

**Fixed Blade**

Heavy duty fixed blade pattern, with interlocking body to prevent blade pop up during arduous cutting applications. The spring opening mechanism allows rapid replacement of dulled blades without the need for any other tool. Spare blades are stored in body. Supplied with impact resistant scabbard, integral belt clip and pencil holder for safe storage.



The spring opening mechanism allows rapid replacement of dulled blades

|                |             |                |
|----------------|-------------|----------------|
| Overall Length | Weight each | Order Code     |
| 185mm          | 347g        | <b>KEN-537</b> |
|                |             | <b>-0480K</b>  |

**Trimming Knife**

**Fixed - Complete with 5 Blades**

Die cast body with heavy duty knurled style for extra grip which provides a greater degree of control and comfort.




|                |             |                |
|----------------|-------------|----------------|
| Overall Length | Weight each | Order Code     |
| 135mm          | 150g        | <b>KEN-537</b> |
|                |             | <b>-0530K</b>  |

**Knife Blades**

Kennedy Industrial quality knife blades have a superior edge hardening for longer tool life and sharper edge. Best value with longer working between blade changes. For use with fixed and retractable trimming knives and window scrapers. Suitable for Kennedy, Stanley, Irwin and other brands of knife.

**Medium Duty**


For use on paper, card and leather.



|               |                 |                |
|---------------|-----------------|----------------|
| Pack Quantity | Weight per pack | Order Code     |
| 5             | 30g             | <b>KEN-537</b> |
| 100           | 250g            | <b>-2540K</b>  |
|               |                 | <b>-2550K</b>  |

**Heavy Duty**

For use on carpets and vinyl.



|               |                 |                |
|---------------|-----------------|----------------|
| Pack Quantity | Weight per pack | Order Code     |
| 5             | 30g             | <b>KEN-537</b> |
| 10            | 55g             | <b>-2560K</b>  |
| 100           | 250g            | <b>-2500K</b>  |
|               |                 | <b>-2570K</b>  |

**Hook Type**

With point, suitable for use in packing industries for penetrating and cutting sheet materials.



|               |                 |                |
|---------------|-----------------|----------------|
| Pack Quantity | Weight per pack | Order Code     |
| 5             | 30g             | <b>KEN-537</b> |
| 100           | 250g            | <b>-2580K</b>  |
|               |                 | <b>-2590K</b>  |

**Automatic Retractable Quick Release Safety Knife**

Designed for comfort and ease of use, this knife has auto retractable blade and bi-material comfort grip. It also features quick blade release and easy release blade storage. Comes complete with 4 blades.



|                |                |
|----------------|----------------|
| Product Number | Order Code     |
| SX660          | <b>KEN-537</b> |
|                | <b>-0790K</b>  |

**YAMOTO Wheel Lock Fixed Blade Trimming Knife**

Turn anti-clockwise to unlock. Turn continuously to disassemble for blade change.



|                |                |
|----------------|----------------|
| Overall Length | Order Code     |
| 155mm          | <b>YMT-537</b> |
|                | <b>-4520K</b>  |

**Wheel Lock Retractable Blade Trimming Knife**

Turn anti-clockwise to unlock. Turn continuously to disassemble for blade change.



|                |                |
|----------------|----------------|
| Overall Length | Order Code     |
| 175mm          | <b>YMT-537</b> |
|                | <b>-4540K</b>  |

**Trimming Knife Blades**

Heavy-duty. For use on carpets and vinyl etc.



|               |                |
|---------------|----------------|
| Pack Quantity | Order Code     |
| 5             | <b>YMT-537</b> |
| 10            | <b>-4310K</b>  |
| 100           | <b>-4320K</b>  |
|               | <b>-4330K</b>  |





### Quick Release Folding Knife

Quick release blade and folds to 9 x 3.5cm to stow using the integral belt clip. Accepts medium, heavy duty and hook blades. With blade guard.



|                |                                 |
|----------------|---------------------------------|
| Product Number | Order Code                      |
| KQF935         | <b>KEN-537</b><br><b>-0640K</b> |

### Trimming Knife

#### Retractable Blade Knife with Scabbard

Trimming knife supplied with heavy duty blade and impact resistant scabbard.



|                |             |                                 |
|----------------|-------------|---------------------------------|
| Overall Length | Weight each | Order Code                      |
| 170mm          | 300g        | <b>KEN-537</b><br><b>-1000K</b> |

#### Retractable - Complete with 5 Heavy Duty Blades

Slimline diecast body with contoured grip which provides a greater degree of control and comfort. High carbon steel blades. Up to five spare blades can be stored in the handle.



|                |             |                                 |
|----------------|-------------|---------------------------------|
| Overall Length | Weight each | Order Code                      |
| 155mm          | 170g        | <b>KEN-537</b><br><b>-0510K</b> |

### Quick Release Utility Knife

Classic design which features quick blade release, comfort grip handle and useful lanyard hole.



|                |                                 |
|----------------|---------------------------------|
| Product Number | Order Code                      |
| SX75N          | <b>KEN-537</b><br><b>-0800K</b> |

### Twin Headed Quick Release Utility Knife

Two knives in one with an interlocking mechanism which ensures only one blade can be used at a time. Features quick blade release and easy blade change function.



|                |                                 |
|----------------|---------------------------------|
| Product Number | Order Code                      |
| SX3200         | <b>KEN-537</b><br><b>-0810K</b> |

### Quick Change Utility Knife

An innovative sliding blade holder with durable soft touch composite casing. Quick and easy to change blade with no tools needed. Compatible with all standard utility blades. One handed operation.



Knife extends to allow auto-retractable blade to be used.



|                |             |                                 |
|----------------|-------------|---------------------------------|
| Overall Length | Weight each | Order Code                      |
| 115mm          | 120g        | <b>KEN-537</b><br><b>-1120K</b> |

### Disposable Knife

Fixed ground steel blade. Non-slip finger/thumb grip. Ideal for industrial use, modelling and craft work. Plastic safety cap with pocket clip.

**new**



|                |                                 |
|----------------|---------------------------------|
| Overall Length | Order Code                      |
| 155mm          | <b>KEN-537</b><br><b>-0070K</b> |

### Auto Return

Fixed blade. Spring loaded plastic slide mechanism, automatically retracts the blade back into the handle when pressure is released. Accepts heavy duty blades only.



|                |             |                                 |
|----------------|-------------|---------------------------------|
| Overall Length | Weight each | Order Code                      |
| 150mm          | 165g        | <b>KEN-537</b><br><b>-0515K</b> |

#### Retractable - Complete with 5 Heavy Duty Blades

Slimline die cast body designed to fit comfortably in the hand, with high carbon steel blades. Up to five spare blades can be stored in the handle.



|                |             |                                 |
|----------------|-------------|---------------------------------|
| Overall Length | Weight each | Order Code                      |
| 160mm          | 120g        | <b>KEN-537</b><br><b>-0500K</b> |

### Retractable Trimming Knife

Diecast aluminium body with retractable locking blade, built-in hanging hook. Complete with one spare blade.



|                |             |                                 |
|----------------|-------------|---------------------------------|
| Overall Length | Weight each | Order Code                      |
| 160mm          | 150g        | <b>SEN-537</b><br><b>-0500K</b> |



**KENNEDY** Non-Sterile  
Handles

**No.3 & 4 Style**

Non-sterile nickel alloy handle with textured body.  
For precision use in modelling and craft work.



| Handle Type | Overall Length | Weight each | Order Code<br>KEN-537 |
|-------------|----------------|-------------|-----------------------|
| No.3        | 123mm          | 27g         | -7230K                |
| No.4        | 135mm          | 27g         | -7240K                |



Dulled blades can be changed quickly and easily.

**Carbon Steel Non-Sterile Blades**
**No.10A**

Non-sterile, for use with No.3 type handle.



| Style | Pack Quantity | Order Code<br>KEN-537 |
|-------|---------------|-----------------------|
| 10A   | 100           | -7015K                |

**No.11**

Non-sterile, for use with No.3 type handle.



| Style | Pack Quantity | Order Code<br>KEN-537 |
|-------|---------------|-----------------------|
| 11    | 100           | -7025K                |

**No.15**

Non-sterile, for use with No.3 type handle.



| Style | Pack Quantity | Order Code<br>KEN-537 |
|-------|---------------|-----------------------|
| 15    | 100           | -7035K                |

**No.21**

Non-sterile, for use with No.4 type handle.



| Style | Pack Quantity | Order Code<br>KEN-537 |
|-------|---------------|-----------------------|
| 21    | 100           | -7045K                |

**No.22**

Non-sterile, for use with No.4 type handle.



| Style | Pack Quantity | Order Code<br>KEN-537 |
|-------|---------------|-----------------------|
| 22    | 100           | -7055K                |

**No.23**

Non-sterile, for use with No.4 type handle.



| Style | Pack Quantity | Order Code<br>KEN-537 |
|-------|---------------|-----------------------|
| 23    | 100           | -7065K                |



Each blade is packaged in safety foil for easier handling.

**No.24**

Non-sterile, for use with No.4 type handle.



| Style | Pack Quantity | Order Code<br>KEN-537 |
|-------|---------------|-----------------------|
| 24    | 100           | -7075K                |

**No.26**

Non-sterile, for use with No.4 type handle.



| Style | Pack Quantity | Order Code<br>KEN-537 |
|-------|---------------|-----------------------|
| 26    | 100           | -7085K                |

**Precision Knives**

Suitable for modellers art and craft workers and wood carvers. Ideal for making point of sale samples where precision cutting is required. Available in three styles:

**Light duty:** lightweight, small diameter aluminium handle suitable for cutting on paper, soft and lightweight materials or wood.



**Medium duty:** lightweight, large diameter aluminium handle suitable for cutting heavy paper and medium density materials.



**Heavy duty:** fluted, ABS plastic handle suitable for working with hardwood, plastic and other difficult to cut materials.



| Product Number | Duty   | Weight each | Order Code<br>KEN-537 |
|----------------|--------|-------------|-----------------------|
| TK1            | Light  | 28g         | -4610K                |
| TK2            | Medium | 47g         | -4620K                |
| TK5            | Heavy  | 47g         | -4630K                |

For replacement blades  
see next page



Multi-purpose knife set, ideal for modelling, craft work and industrial use. Covers a wide range of applications including cutting, chiselling, stencilling and scoring. All holders have a positive guide locator to provide extra safety when changing blades.

**Contents:**

- 1x light duty holder.
- 1x medium duty holder.
- 1x fluted ABS holder.
- 1x general cutting and trimming blade.
- 1x general cutting and slicing blade.
- 3x detail cutting and stripping blade.
- 1x medium/heavy duty cutting blade.
- 1x stencilling and scoring blade.
- 1x precision wood chiselling blade.
- 1x deep cross and smooth wood chiselling blade.
- 2x chiselling and trimming blade.
- 1x heavy duty cutting blade.
- 1x close corner cutting blade.


**16  
PIECES**


| Weight each | Order Code     |
|-------------|----------------|
| 235g        | <b>KEN-537</b> |
|             | <b>-5100K</b>  |

**Kennedy Precision Blades**  
**General Cutting & Trimming**


| Pack Quantity | Weight each | Order Code     |
|---------------|-------------|----------------|
| 10            | 9g          | <b>KEN-537</b> |
|               |             | <b>-7520K</b>  |

**General Cutting & Slicing**


| Pack Quantity | Weight each | Order Code     |
|---------------|-------------|----------------|
| 10            | 9g          | <b>KEN-537</b> |
|               |             | <b>-7280K</b>  |

**Detail Cutting & Stripping**


| Pack Quantity | Weight each | Order Code     |
|---------------|-------------|----------------|
| 5             | 8g          | <b>KEN-537</b> |
|               |             | <b>-7310K</b>  |

**Stencilling & Scoring**


| Pack Quantity | Weight each | Order Code     |
|---------------|-------------|----------------|
| 5             | 9g          | <b>KEN-537</b> |
|               |             | <b>-7350K</b>  |

**Precision Wood Chiselling**


| Pack Quantity | Weight each | Order Code     |
|---------------|-------------|----------------|
| 5             | 12g         | <b>KEN-537</b> |
|               |             | <b>-7550K</b>  |

**Deep Cross & Wood Chiselling**


| Pack Quantity | Weight each | Order Code     |
|---------------|-------------|----------------|
| 5             | 9g          | <b>KEN-537</b> |
|               |             | <b>-7400K</b>  |

**Chiselling & Trimming**


| Pack Quantity | Weight each | Order Code     |
|---------------|-------------|----------------|
| 10            | 10g         | <b>KEN-537</b> |
|               |             | <b>-7410K</b>  |

**Heavy Duty Cutting**


| Pack Quantity | Weight each | Order Code     |
|---------------|-------------|----------------|
| 5             | 9g          | <b>KEN-537</b> |
|               |             | <b>-7420K</b>  |

**Close Corner Cutting**


| Pack Quantity | Weight each | Order Code     |
|---------------|-------------|----------------|
| 10            | 9g          | <b>KEN-537</b> |
|               |             | <b>-7480K</b>  |

**Medium/Heavy Duty Cutting**


| Pack Quantity | Weight each | Order Code     |
|---------------|-------------|----------------|
| 10            | 10g         | <b>KEN-537</b> |
|               |             | <b>-7470K</b>  |


**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**
**44.3**



**KENNEDY** Hacksaw  
Frames
150mm  
(6")  
BLADE**Pro-Grip Junior**

Rigid steel frame. Contoured die cast handle with knuckle guard. Thumb screw blade tensioner. Complete with 150mm (6") blade.



| Overall Length | Weight per 12 | Order Code    |
|----------------|---------------|---------------|
| 235mm          | 2.50kg        | <b>-0550K</b> |

**YAMOTO** 6" Junior  
Hacksaw

Featuring an aluminium handle and tension adjustment screw, this junior hacksaw is supplied with a 150mm (6") general purpose blade.



| Blade Length | Weight each | Order Code    |
|--------------|-------------|---------------|
| 150mm        |             | <b>-0300K</b> |

**6" Quick Release Junior Hacksaw**

Featuring a quick release mechanism for fast and easy blade change, this hacksaw combines a robust design with a moulded handle. It comes supplied with a 150mm (6") general purpose blade.



| Blade Length | Weight each | Order Code    |
|--------------|-------------|---------------|
| 150mm        |             | <b>-0310K</b> |

**SENATOR** 6" Junior  
Hacksaw

Comprising a robust steel frame with finger guard, this lightweight hacksaw comes supplied with a 150mm (6") general purpose blade



| Blade Length | Order Code    |
|--------------|---------------|
| 150mm        | <b>-0300K</b> |

**Pad Saw**

Heavy duty foam grip. Accepts 1/2" deep hacksaw blades. Suitable for use in areas of awkward access. **Blade length:** 145mm.



| Overall Length | Weight each | Order Code    |
|----------------|-------------|---------------|
| 275mm          | 130g        | <b>-1000K</b> |

**Coping Saw**

For cutting and shaping in wood. Steel frame and wooden handle. Supplied with 150mm (6") blade.

150mm  
(6")  
BLADE

| Overall Length | Weight each | Order Code    |
|----------------|-------------|---------------|
| 290mm          | 200g        | <b>-2100K</b> |

**Spare Blades to suit above**

| Length (mm) | TPI | Pk Qty | Order Code    |
|-------------|-----|--------|---------------|
| 150 (6")    | 14  | 10     | <b>-1020K</b> |

**Low Profile Junior Hacksaw**

Manufactured from rigid and lightweight aluminium with hi-strength I-beam frame. Moulded 'soft touch' cushion grip. Supplied with blade.

150mm  
(6")  
BLADE

| Overall Length | Weight per 12 | Order Code    |
|----------------|---------------|---------------|
| 250mm          | 2.70kg        | <b>-0500K</b> |

**Standard Junior Pattern**

Epoxy coated spring steel frame, keeps the blade tensioned correctly at all times. Suitable for smaller applications, where the workpiece cannot be held firmly. Complete with blade 150mm (6") 32tpi.

150mm  
(6")  
BLADE

| Overall Length | Weight per 50 | Order Code    |
|----------------|---------------|---------------|
| 260mm          | 6.40kg        | <b>-0600K</b> |

**Spare Blade**

| Type  | Length (mm) | TPI | Order Code    | Price |
|-------|-------------|-----|---------------|-------|
| Metal | 150         | 32  | <b>-0620K</b> | /10   |
| Wood  | 150         | 14  | <b>-0640K</b> | /1    |

**Hacksaw Frames****Beaver Style**

High impact resistant pistol grip. Steel oval section frame for strength and rigidity. Thumb screw blade tensioning. Supplied complete with 150mm (6") 18tpi metal cutting blade.

150mm  
(6")  
BLADE

| Overall Length | Weight per 12 | Order Code    |
|----------------|---------------|---------------|
| 275mm          | 1.80kg        | <b>-0630K</b> |

**Low Profile Hacksaw**

Manufactured from rigid and lightweight aluminium with hi-strength I-beam frame. Moulded 'soft touch' cushion grip. Features wing nut blade tensioning and 0° and 45° blade settings. Supplied with blade.

300mm  
(12")  
BLADE

| Overall Length | Weight per 5 | Order Code    |
|----------------|--------------|---------------|
| 400mm          | 2.75kg       | <b>-0800K</b> |

**Mini Hand Saw - Comfort Grip**

Plastic pistol grip with slip resistant grooves, spring steel frame. Complete with blade.

150mm  
(6")  
BLADE

| Overall Length | Weight per 12 | Order Code    |
|----------------|---------------|---------------|
| 216mm          | 1.20kg        | <b>-0620K</b> |

**Tile Saw**

Abrasive coated blade suitable for cutting intricate coated, to allow flush fitting of tiles. Supplied with one blade.

150mm  
(6")  
BLADE

| Overall Length | Weight each | Order Code    |
|----------------|-------------|---------------|
| 200mm          | 210g        | <b>-3600K</b> |

**Spare Blades to suit above**

| Length (mm) | Weight each | Order Code    |
|-------------|-------------|---------------|
| 150         | 4g          | <b>-1400K</b> |





### Professional 'Plus' Hacksaw

Heavy duty steel frame with front grip and 'D' style handle with grooved slip resistant rubber inlay for positive control and comfort. Wing nut and lever blade tensioning. The blade can be set at 45° to the frame to allow flush cutting. Supplied with blade.



### Quick Release Hacksaw

Featuring quick blade release and cushioned die-cast aluminium handle. Precise tension adjustment through ring nut and 45° & 90° blade positioning. Bi-metal blade included.



| Overall Length | Order Code     |
|----------------|----------------|
|                | <b>KEN-538</b> |
|                | <b>-2820K</b>  |

| Contents | Weight each | Order Code     |
|----------|-------------|----------------|
| As above | 850g        | <b>KEN-538</b> |
|          |             | <b>-3050K</b>  |

### Adjustable Hacksaw

Die-cast 'D' style handle for user comfort and control. Epoxy coated tubular steel frame for strength and rigidity. The blade can be set at 90° to the frame to allow cutting in areas with restricted access. Wing nut blade tensioning. Accepts 250mm (10") and 300mm (12") blades. Supplied with blade.



| Overall Length | Weight per 5 | Order Code     |
|----------------|--------------|----------------|
| 475mm          | 3.20kg       | <b>KEN-538</b> |
|                |              | <b>-0650K</b>  |

### 2-Piece Hacksaw Set

Beaver style 150mm (6") junior hacksaw and 250/300mm (10"/12") adjustable hacksaw with wing nut tensioner.



| Contents | Weight each | Order Code     |
|----------|-------------|----------------|
| As above | 850g        | <b>KEN-538</b> |
|          |             | <b>-3000K</b>  |





**GROUP 539 CLAMPS**

**KENNEDY**  
QUALITY INDUSTRIAL TOOLING

**Lightweight Pressed Steel G-Clamps**

Welded steel frame with chrome-plated steel screw, handle and swivel shoes.  
Suitable for light duty applications.



| Capacity (mm)   | Throat Depth | Weight each | Order Code KEN-539 |
|-----------------|--------------|-------------|--------------------|
| <b>Standard</b> |              |             |                    |
| 25              | 27           | 80g         | -1970K             |
| 50              | 25           | 130g        | -1980K             |
| 75              | 35           | 310g        | -1990K             |
| 100             | 48           | 600g        | -2000K             |
| <b>Deep</b>     |              |             |                    |
| 63              | 66           | 360g        | -2010K             |

**Medium Duty G-Clamps**

Engineer's clamps with cast anti-twist ribbed frame. For tradesmen, light engineering, woodworker's etc.



| Capacity (mm) | Throat Depth | Weight each | Order Code KEN-539 |
|---------------|--------------|-------------|--------------------|
| 75            | 40mm         | 0.75kg      | -2730K             |
| 100           | 52mm         | 1.40kg      | -2740K             |
| 150           | 82mm         | 2.00kg      | -2760K             |

**Heavy Duty G-Clamps**

Manufactured from drop forged ribbed anti-twist frame steel suited to fabrication and other heavy applications, etc.



| Capacity (mm) | Throat Depth | Weight each | Order Code KEN-539 |
|---------------|--------------|-------------|--------------------|
| 50            | 33mm         | 0.35kg      | -2020K             |
| 75            | 40mm         | 0.75kg      | -2030K             |
| 100           | 52mm         | 1.40kg      | -2040K             |
| 150           | 82mm         | 2.00kg      | -2060K             |
| 200           | 100mm        | 3.00kg      | -2080K             |
| 250           | 123mm        | 5.10kg      | -2100K             |
| 300           | 127mm        | 7.60kg      | -2120K             |



**Group 405**

**Extra Heavy Duty G-Clamps**

Manufactured from drop forged steel ribbed anti-twist frame suited to fabrication and welding applications, etc.



| Capacity (mm) | Throat Depth | Weight each | Order Code KEN-539 |
|---------------|--------------|-------------|--------------------|
| 50            | 32mm         | 0.45kg      | -2220K             |
| 75            | 43mm         | 0.70kg      | -2230K             |
| 100           | 52mm         | 1.40kg      | -2240K             |
| 150           | 72mm         | 1.90kg      | -2260K             |
| 200           | 110mm        | 4.50kg      | -2280K             |
| 250           | 123mm        | 6.00kg      | -2300K             |
| 300           | 130mm        | 9.00kg      | -2320K             |

**Extra Heavy Duty G-Clamps - Copper Plate Screw**

Manufactured from drop forged ribbed anti-twist frame steel suited to fabrication and welding applications, etc. Resistant to rusting and weld spatter.



| Capacity (mm) | Throat Depth | Weight each | Order Code KEN-539 |
|---------------|--------------|-------------|--------------------|
| 50            | 40mm         | 0.60kg      | -2420K             |
| 75            | 50mm         | 0.70kg      | -2430K             |
| 100           | 65mm         | 1.30kg      | -2440K             |
| 150           | 90mm         | 3.00kg      | -2460K             |
| 200           | 110mm        | 4.50kg      | -2480K             |
| 250           | 130mm        | 5.90kg      | -2500K             |
| 300           | 150mm        | 9.10kg      | -2520K             |

**Heavy Duty Deep Throat Clamps**

Specialist clamp manufactured from drop forged steel, with extra throat depth for clamping workpieces further in from the edges, allowing a greater range of applications.



| Capacity (mm) | Throat Depth | Weight each | Order Code KEN-539 |
|---------------|--------------|-------------|--------------------|
| 50            | 60mm         | 460g        | -2620K             |
| 75            | 80mm         | 955g        | -2630K             |
| 100           | 115mm        | 2195g       | -2640K             |

**Spare Shoes for Heavy, Medium Duty & Deep Throat G-Clamps**

| Shoe to fit (mm) | Weight each | Order Code KEN-567 |
|------------------|-------------|--------------------|
| 50               | 10g         | -5020K             |
| 75               | 15g         | -5030K             |
| 100              | 30g         | -5040K             |
| 150              | 40g         | -5060K             |

**SENATOR**  
QUALITY TOOLING

**Light Duty Cast G-Clamps**

Light duty cast steel. Suitable for tradesmen, engineer's, woodworker's etc.



| Capacity | Weight each | Order Code SEN-539 |
|----------|-------------|--------------------|
| 50mm     | 195g        | -1020K             |
| 100mm    | 675g        | -1040K             |
| 150mm    | 1340g       | -1060K             |

**KENNEDY**  
QUALITY INDUSTRIAL TOOLING

**90° Welding Angle Clamp**

One man set up and operation, made from cast iron, copper plated spindle for spatter protection, T-Handle enables high pressure for secure clamping, easy fixing to a work bench or machine tool table.



| Capacity (mm) | Weight each | Order Code KEN-539 |
|---------------|-------------|--------------------|
| 60mm          | 05.3kg      | -0360K             |
| 90mm          | 10.5kg      | -0390K             |

**G-Clamp Adaptor**

Acts as a 'third arm' allowing many clamping set-ups not normally possible without the use of additional or oversized clamps. Locates onto the cross-section of the clamp frame allowing clamping pressure to be applied between the clamp frame and the workpiece.



Clamps supplied separately - see above

| Opening Capacity | Weight each | Order Code KEN-539 |
|------------------|-------------|--------------------|
| 95mm (3 3/4")    | 420g        | -3590K             |



## Spring Action Gripper Clamps

Designed for speed and convenience. One hand operation gripping most materials. Durable non marking jaws pivot to hold irregular shaped workpieces. Contoured handle for non-slip grip with serrated jaws for extra firm holding.



**Provides  
a Third  
Hand**

**4  
PIECES**

| Overall Length | Jaw Opening (max.) | Throat Depth | Weight per 4 | Order Code    |
|----------------|--------------------|--------------|--------------|---------------|
| 120mm          | 40mm               | 45mm         | 248g         | <b>-5300K</b> |
| 150mm          | 60mm               | 65mm         | 250g         | <b>-5320K</b> |
| 210mm          | 90mm               | 100mm        | 772g         | <b>-5340K</b> |

## Sash Clamps

Used for a wide range of long reach clamping applications. SG ductile cast iron heads and slides, bars are manufactured from bright drawn steel. Main screw and handles are made from high grade steel.



**Unique spring load pin mechanism:**  
For quick and easy adjustment. Can't drop out during use.



## Gripper Clamp Set

Spring loaded clamps, as above.

### Contents:

4x 120mm,  
4x 150mm,  
4x 210mm.



Weight

1564g

Order Code

**KEN-539**

**-5400K**

**CLAMPS**

**GROUP  
539**



**12  
PIECES**

**HAND TOOLS**



**Group 445**

**High Grade  
Steel for  
Heavy Duty  
Applications**

| Capacity (mm) | Weight each | Order Code    |
|---------------|-------------|---------------|
| 600           | 2.20kg      | <b>-3820K</b> |
| 910           | 2.75kg      | <b>-3840K</b> |
| 1220          | 3.25kg      | <b>-3860K</b> |
| 1670          | 4.00kg      | <b>-3880K</b> |

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**

**447**



GROUP  
**539**

## CLAMPS

**KENNEDY**  
PROFESSIONAL

### One Handed Quick Action Bar Clamps



Kennedy Professional Dual Action Quick Clamps are designed for use one handed for speed and convenience. The pistol grip handle houses a ratchet clamping mechanism that incrementally applies clamping force when you pull the trigger. To release or reposition the clamp jaw hold down the quick release button and slide the jaw along the bar. Can be used as a bar clamp or as a spreader simply by turning the handle around.

**Features include:** 90mm throat depth. Clamping force of up to 180kg. Quick release buttons for both jaws allows them to be positioned quickly anywhere on the bar and can be turned around to act as a spreader. Heavy duty steel bar. Non-slip clamp faces.



**UP TO  
180kg  
PRESSURE**

**2-IN-1 CLAMP  
OR SPREADER**

| Capacity<br>(mm) | Spread<br>Range (mm) | Clamping<br>Force | Order Code<br><b>KEN-539</b> |
|------------------|----------------------|-------------------|------------------------------|
| 175              | 190 - 425            | 180kg             | <b>-3330K</b>                |
| 325              | 190 - 580            | 180kg             | <b>-3360K</b>                |
| 475              | 190 - 730            | 180kg             | <b>-3390K</b>                |
| 625              | 190 - 880            | 180kg             | <b>-3420K</b>                |
| 925              | 190 - 1125           | 180kg             | <b>-3450K</b>                |

**SENATOR**  
QUALITY TOOLING



### One-Handed Speed Clamp

Manufactured from pressed steel for strength and durability. Trigger adjustment based on the sealant cartridge applicator gun. Quick release thumb lever. High strength hexagonal steel thrust rod with swivel shoe for clamping non parallel surfaces. High strength plastic contact pads.



| Capacity<br>(mm) | Throat<br>Depth (mm) | Order Code<br><b>SEN-539</b> |
|------------------|----------------------|------------------------------|
| 100              | 56                   | <b>-5500K</b>                |

HAND TOOLS

**KENNEDY**  
QUALITY INDUSTRIAL TOOLING

### One-Handed, Quick Action Bar Clamps



Designed for speed and convenience with a comfortable ratchet handle design. The pistol grip handle allows you to hold the clamp and slide the jaw to work with one hand. Fitted with a quick release button and soft interchangeable pads which eliminate the need to find wood blocks to protect your work. Can be used as a bar clamp and can also convert into a spreader in seconds without the need for any other tools.



**THROAT DEPTH  
85mm**

**UP TO  
90kg  
PRESSURE**

**2-IN-1 CLAMP  
OR SPREADER**

| Capacity<br>(mm) | Spread<br>Range (mm) | Clamping<br>Force | Order Code<br><b>KEN-539</b> |
|------------------|----------------------|-------------------|------------------------------|
| 150              | 120-350              | 90kg              | <b>-3060K</b>                |
| 300              | 180-500              | 90kg              | <b>-3120K</b>                |
| 450              | 180-650              | 90kg              | <b>-3180K</b>                |
| 600              | 180-800              | 90kg              | <b>-3240K</b>                |

448

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**



General purpose. Manufactured from medium heat treated carbon steel finished with nickel and chrome plating. Steel T-spindle for extra clamping force.

**Quick  
Action**


| Capacity (mm) | Throat Depth (mm) | Order Code<br>KEN-539 |
|---------------|-------------------|-----------------------|
| 160           | 80                | -0500K                |
| 200           | 100               | -0520K                |
| 250           | 110               | -0540K                |
| 300           | 110               | -0560K                |
| 400           | 110               | -0580K                |
| 500           | 110               | -0600K                |
| 600           | 110               | -0620K                |

**Wooden Handle Speed Clamps**

Manufactured from medium heat treated carbon steel with nickel and chrome plated finish. With a straight wooden handle for easy clamping.

**Easy  
To Use**


| Capacity (mm) | Throat Depth (mm) | Order Code<br>KEN-539 |
|---------------|-------------------|-----------------------|
| 120           | 60                | -0800K                |
| 160           | 80                | -0820K                |
| 200           | 100               | -0840K                |
| 250           | 130               | -0860K                |
| 300           | 130               | -0880K                |
| 400           | 110               | -0900K                |
| 600           | 110               | -0940K                |


**Heavy Duty T-Handle Clamps**

Manufactured from heat treated carbon steel for extra strength. Finished with nickel and chrome plating. Textured T-spindle for extra clamping force.

**Thicker  
Section For  
Greater  
Strength**


| Capacity (mm) | Throat Depth (mm) | Order Code<br>KEN-539 |
|---------------|-------------------|-----------------------|
| 150           | 60                | -4200K                |
| 200           | 100               | -4220K                |
| 300           | 100               | -4280K                |

**Heavy Duty T-Handle Multi-Hold Clamps**

Manufactured from heat treated carbon steel for extra strength. Finished with nickel and chrome plating. Textured T-spindle for extra clamping force. Supplied with three replaceable clamping pads for versatility.

**Extremely  
Versatile**


| Capacity (mm) | Throat Depth (mm) | Order Code<br>KEN-539 |
|---------------|-------------------|-----------------------|
| 250           | 120               | -4320K                |
| 300           | 120               | -4340K                |
| 400           | 120               | -4360K                |
| 500           | 120               | -4380K                |
| 600           | 120               | -4400K                |



**KENNEDY** Liquid Measures

Chemical and oil resistant polyethylene liquid measures.

**Graduations:**

¼ltr - 10ml,  
½ltr - 10ml,  
1ltr - 10ml,  
2ltr - 20ml,  
3ltr - 50ml,  
5ltr - 100ml.



| Capacity | Weight each | Order Code KEN-540 |
|----------|-------------|--------------------|
| ¼ltr     | 45g         | -5500K             |
| ½ltr     | 75g         | -5520K             |
| 1ltr     | 100g        | -5540K             |
| 2ltr     | 180g        | -5560K             |
| 3ltr     | 260g        | -5580K             |
| 5ltr     | 360g        | -5600K             |

**Heavy Duty Liquid Measures**

Chemical and oil-resistant polyethylene liquid measures. Integral dispensing spout resistant to extreme weather conditions. Can be used in conjunction with dispensing spouts listed below.


**Graduations:**

½ltr - ¼ and ½ltr,  
1ltr - ¼, ½, ¾ltr,  
2ltr - ½, 1, 1½ and 2ltr,  
3ltr - 1, 1½, 2, 2½ and 3ltr,  
5ltr - 1, 2, 3, 4 and 5ltr.

| Capacity | Weight each | Order Code KEN-540 |
|----------|-------------|--------------------|
| ½ltr     | 60g         | -5700K             |
| 1ltr     | 100g        | -5720K             |
| 2ltr     | 180g        | -5740K             |
| 3ltr     | 240g        | -5760K             |
| 5ltr     | 340g        | -5770K             |

**Pouring Spouts**

Flexible polyethylene, suitable for use with the spouted funnels and measures to allow for easy pouring in awkward areas.

| Suitable For          | Weight each | Order Code KEN-540 |
|-----------------------|-------------|--------------------|
| ½ & 1ltr Measures     | 5g          | -5160K             |
| 2, 3, & 5ltr Measures | 15g         | -5170K             |

**Tin-Plated Oil Supply Cans**

With easy pour handles for extra stability, extended spout with chain retained end cap and hinged lid cap.



| Capacity litre | Weight each | Order Code KEN-540 |
|----------------|-------------|--------------------|
| 3              | 562g        | -2540K             |
| 5              | 702g        | -2560K             |
| 10             | 1038g       | -2580K             |

**Plastic Funnels**

Resistant to oil and chemicals. Heavy duty polyethylene which will not shatter or break in cold weather.



| Diameter (mm) | Weight each | Order Code KEN-540 |
|---------------|-------------|--------------------|
| 50            | 4g          | -2810K             |
| 75            | 9g          | -2815K             |
| 100           | 20g         | -2820K             |
| 120           | 32g         | -2830K             |
| 150           | 50g         | -2840K             |

**Plastic Funnel Set**

**Contents:**  
50, 75, 100 and 125mm.



**4  
PIECES**

| Weight each | Order Code KEN-540 |
|-------------|--------------------|
| 75g         | -2890K             |

**Heavy Duty Plastic Funnels**

With anti-splash rims.



| Diameter (mm) | Weight each | Order Code KEN-540 |
|---------------|-------------|--------------------|
| 160           | 150g        | -2910K             |
| 200           | 163g        | -2920K             |
| 250           | 210g        | -2930K             |
| 350           | 491g        | -2940K             |

**Polyethylene Funnel with Lockable Lid**

Screws into a standard 2" bung hole on a barrel. Includes a removable filter screen.

**Size:** 253mm x 200mm



| Capacity | Order Code KEN-540 |
|----------|--------------------|
| 4.5ltr   | -2680K             |

**Plastic Jerry Cans**

Secure water containers manufactured from food grade plastic available in 10, 15 and 20ltr capacities, fitted with a collared screw top for ease of refilling and a twist on-off tap for spill free dispensing. The moulded handle design makes it ideal for transporting and storing water in and around the work place, home or when travelling.



| Capacity litre | Type  | Order Code KEN-540 |
|----------------|-------|--------------------|
| 10             | Water | -6500K             |
| 15             | Water | -6520K             |
| 20             | Water | -6540K             |
| 35             | Water | -6570K             |

**Industrial Quality Plastic Funnel**
**Rectangular**

Suitable for use with petrol, oil, water etc.



| Size (mm) | Weight each | Order Code KEN-540 |
|-----------|-------------|--------------------|
| 250 x 180 | 210g        | -2900K             |

**Tin-Plated Industrial Quality Funnels**

Suitable for use with petrol, oil, water etc.



| Diameter (mm) | Weight each | Order Code KEN-540 |
|---------------|-------------|--------------------|
| 150           | 140g        | -2600K             |
| 200           | 250g        | -2800K             |

**Metal Funnel with Plastic Spout & Filter**

Sturdy metal construction complete with integral handle for ease of use, plastic spout and removable filter. High rim design guards against splashing. Flexible spout extension also available (KEN-540-2700K).



| Diameter                 | Order Code KEN-540 |
|--------------------------|--------------------|
| 170mm                    | -2690K             |
| Flexible spout extension | -2700K             |

**Plastic Funnel**

With anti-splash rim, removable brass filter, integral handle and rigid offset spout.



| Diameter (mm) | Weight each | Order Code KEN-540 |
|---------------|-------------|--------------------|
| 160           | 135g        | -2960K             |

**Plastic Funnel**

With anti-splash rim, integral hanging hook and 300mm detachable flexible spout.



| Diameter (mm) | Order Code KEN-540 |
|---------------|--------------------|
| 160           | -2996K             |



## YAMOTO Lever Pump

Zinc-plated, self-adjusting telescopic suction tube. Comfortable lever grip. Suitable for lubricants and non-corrosive liquids. Suitable for container sizes 60 and 200ltr. Tube length 480 - 900mm. For use with BSP and metric threaded barrels.



| Discharge per Stroke | Weight each | Order Code    |
|----------------------|-------------|---------------|
| 300ml                | 2.0kg       | <b>-3000K</b> |



## KENNEDY Lever Pump

**LP300**  
Zinc chrome finish steel, telescopic suction tube. Suitable for lubricants, diesel and non-corrosive liquids. Suitable for container sizes 60 and 200ltr. Tube length 480 - 900mm. Inlet on pump 2" BSP and M59 x 5 male thread.



| Discharge per Stroke | Weight each | Order Code    |
|----------------------|-------------|---------------|
| 300ml                | 2.0kg       | <b>-3000K</b> |

## KENNEDY Piston Pump

**PP190**  
Polypropylene pump with viton seals. Chemical resistant. Suitable for lubricants, fuels, solvents and non-corrosive liquids. Suitable for container size 200ltr. Tube length 480 - 900mm. Inlet on pump 2" BSP male and female thread.



| Discharge per Stroke | Weight each | Order Code    |
|----------------------|-------------|---------------|
| 190ml                | 730g        | <b>-3250K</b> |

## Rotary Pump

**RP250**  
Cast iron pump, steel suction tube and spout. Suitable for lubricants and diesel (not anti-freeze). Suitable for container size 200ltr. Tube length 980mm. Inlet on pump 2" BSP and M59 x 5 male thread.



| Discharge per Stroke | Weight each | Order Code    |
|----------------------|-------------|---------------|
| 250ml<br>35ltr/min   | 5.7kg       | <b>-3100K</b> |

## Drum Taps

With 3/4" BSP male threads. Both models can be locked into the off position by use of a padlock or locking pin.

### Polypropylene

Not suitable for petroleum-based products.



| Type          | Weight each | Order Code    |
|---------------|-------------|---------------|
| Zinc-Plated   | 300g        | <b>-9000K</b> |
| Polypropylene | 100g        | <b>-9050K</b> |

## Rotary Chemical Dispensing Pump

Designed for use with fluids where a regular cast iron or steel barrel pump cannot be used. Pump body is made from glass filled polypropylene with Rytan veins. Seals are from Viton rubber and all hardware is stainless steel. Strainer fitted at the suction tube inlet stops contaminants. Threaded polypropylene suction tube and a choice of 2" bung adaptors for use on both plastic and metal drums of capacities 50ltr and 205ltr. For use with water-based fluids, anti-freeze, acids, chemicals etc., in addition to all petroleum-based products. Delivery 5ltr per 20 turns of the handle).

**DO NOT USE** with acetone, lacquer, mineral oils, solvents or turpentine.

| Discharge per Stroke | Weight each | Order Code    |
|----------------------|-------------|---------------|
| 250ml                | 3kg         | <b>-3800K</b> |

## FLUID HANDLING

### Syphon Pump

Flexible plastic outlet and semi-rigid inlet tubes. Hand pumping units incorporate one-way valves. Suitable for use with petrol, diesel and non-corrosive liquids. All tubes can be cut to length.

**SPS/25** For use with containers up to 25ltr. Fitted with 30mm bung.

**Tube length:** inlet 410mm/outlet 530mm.

**SPS/205** For use with containers up to 205ltr. Fitted with a 50mm threaded bung.

**Tube length:** inlet 860mm/outlet 1000mm.

**SPH/205** Heavy duty, for use with containers up to 205ltr. Fitted with a 50mm threaded bung.

**Tube length:** inlet 860mm/outlet 1000mm.



**SPS/25** has a squeeze action. **SPS/205 & SPH/205** have a plunger type action.

Up to 25ltr



Up to 205ltr  
Heavy duty

Up to 205ltr

| Model Number | Suitable for Containers | Weight each | Order Code    |
|--------------|-------------------------|-------------|---------------|
| SPS/25       | 25ltr                   | 40g         | <b>-4000K</b> |
| SPS/205      | 205ltr                  | 80g         | <b>-4050K</b> |
| SPH/205      | 205ltr                  | 420g        | <b>-4150K</b> |

## Double Diaphragm Fuel Transfer Pump

Heavy duty aluminium die-cast construction fuel transfer pump with a discharge rate of up to 1 gallon per 5 strokes (800ml per stroke). Stainless steel piston and fuel resistant hi-nitrile rubber diaphragm. 2" die cast bung adapter and extra heavy-duty steel handle with security locking latch. Pump inlet is fitted with an easy to clean wire mesh screen filter. Telescopic suction tube, adjustable to fit 50 to 205ltr drums, with non-return valve. Easy dispensing through 2.4m (8') of antistatic neoprene rubber hose with die-cast dispensing nozzle.

| Discharge per Stroke | Weight each | Order Code    |
|----------------------|-------------|---------------|
| 800ml                | 7.5kg       | <b>-3600K</b> |



**KENNEDY**  
QUALITY INDUSTRIAL TOOLS
**Dispensing  
Bottles**

Manufactured from oil and chemical resistant polyethylene. With rigid applicator nozzles and sealing caps.


**60ml Concertina Pump Action Bottle**

| Capacity (ml) | Weight each | Order Code    |
|---------------|-------------|---------------|
| 60            | 15g         | <b>-5000K</b> |

**250ml Squeeze Bottle**

| Capacity (ml) | Weight each | Order Code    |
|---------------|-------------|---------------|
| 250           | 40g         | <b>-5020K</b> |
| 500           | 60g         | <b>-5040K</b> |

**With 25° Adjustable Brass Spout & Nozzle**

| Capacity (ml) | Spout Length | Weight each | Order Code    |
|---------------|--------------|-------------|---------------|
| 125           | 90mm         | 40g         | <b>-5100K</b> |
| 250           | 150mm        | 55g         | <b>-5120K</b> |
| 500           | 190mm        | 70g         | <b>-5140K</b> |

**Heavy Duty Trigger Hand Sprayers**


Manufactured from polyethylene these robust trigger spray dispensers are suitable for many industrial applications, will dispense various chemicals, water-based detergents, solvents and cleaning agents.



| Capacity (ml) | Type       | Weight each | Order Code    |
|---------------|------------|-------------|---------------|
| 500           | Industrial | 79g         | <b>-5400K</b> |
| 740           | Industrial | 85g         | <b>-5420K</b> |
| 1000          | Industrial | 146g        | <b>-5440K</b> |

**Dual Transfer Pump**
**DTP500**

Heavy-duty aluminium construction. Durable inlet and outlet valves. Suitable for the transfer of many different liquid types. Portable and easy to operate. Ideal for use in many home, industrial and farm applications.

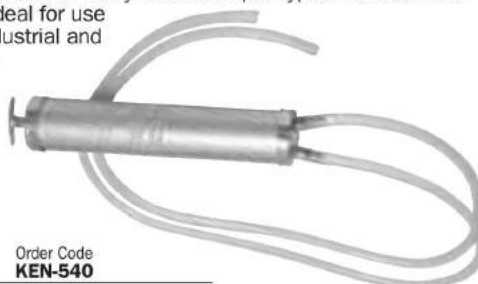

| Capacity (cc) | Weight each | Order Code    |
|---------------|-------------|---------------|
| 500           | 878g        | <b>-3400K</b> |

**Plastic Oil Cans**

One-piece moulded plastic bodies with positive force feed pumps, supplied with nylon push-fit spouts.



| Capacity (cc) | Spout Length | Weight each | Order Code    |
|---------------|--------------|-------------|---------------|
| 350           | 150mm        | 110g        | <b>-1880K</b> |
| 500           | 150mm        | 120g        | <b>-1900K</b> |
| 1000          | 230mm        | 170g        | <b>-1920K</b> |

**Spare Spouts to Suit (Interchangeable)**

| Type  | Spout Length | Weight each | Order Code    |
|-------|--------------|-------------|---------------|
| Nylon | 230mm        | 8g          | <b>-1950K</b> |
| Nylon | 255mm        | 17g         | <b>-1970K</b> |

**'Snap' Bottom Oil Can**

Traditional 'style' seamless metal oil can with enamel finish. Invert can and pop the bottom for an exact application. Supplied with 120mm rigid metal spout.



| Capacity (ml) | Weight each | Order Code    |
|---------------|-------------|---------------|
| 350           | 150g        | <b>-6200K</b> |

**Metal Oil Cans**

Enamel finish, heavy gauge, seamless metal-bodied oil cans. With positive force feed brass pumps and valves. Supplied with both rigid metal and flexible nylon threaded spouts.



| Capacity (cc) | Weight per 10 | Order Code    |
|---------------|---------------|---------------|
| 125           | 2.20kg        | <b>-1120K</b> |
| 250           | 2.90kg        | <b>-1250K</b> |
| 350           | 3.20kg        | <b>-1350K</b> |
| 500           | 3.20kg        | <b>-1500K</b> |
| 750           | 3.67kg        | <b>-1750K</b> |
| 1000          | 4.16kg        | <b>-1100K</b> |

**Spare Spouts to Suit (Interchangeable)**

| Type     | Spout Length | Weight each | Order Code    |
|----------|--------------|-------------|---------------|
| Flexible | 150mm        | 170g        | <b>-1800K</b> |
|          | 210mm        | 210g        | <b>-1850K</b> |

**Oil Suction Gun**
**SG500**

Chrome finish. Suitable for rapid draining or filling of oil and other non-corrosive liquids.



**Working pressure:** 90psi/6.2bar.  
**Diameter:** 63mm.  
**Overall length:** 330mm.

| Capacity (cc) | Weight each | Order Code    |
|---------------|-------------|---------------|
| 500           | 870g        | <b>-0380K</b> |



## Pneumatic Fluid Extractor

### FEBK10

Pneumatic fluid extractor for use in draining engine oil, water, fuel and hydraulic fluids from vehicle engines and other mechanical equipment, bleeding brake/clutch fluid and collection of other non-corrosive fluid spillage. High capacity 10ltr fluid reservoir ideal for garage, extension tube storage, used for workshop and on-site use. Supplied with 1500 x 15mm initial tubing with extension tubes; 700 x 6mm, 360 x 10mm, 310 x 6mm and 380mm brake bleeder attachment. Air supply 70-110psi (5-8bar), air consumption 180ltr/min, vacuum (maximum) 500mm HG, extraction rate 2.5ltr/min., air inlet size 1/4" BSP.



|             |                                 |
|-------------|---------------------------------|
| Weight each | Order Code                      |
| 3.5kg       | <b>KEN-540</b><br><b>-4700K</b> |

## Mobile Waste Oil Drainer

### ODB300

A mobile polyethylene container for the collection of waste oil draining by gravity from engines/gearboxes. A float level indicator lets you know when nearing full capacity. The polyamide base is fitted with heavy-duty castors and a handle for easy manoeuvrability. The drain pan is fitted with an anti-splash mesh.

**Adjustable centre shaft height adjustable:**  
900 - 1600mm

**Polypropylene drain pan:** 395mm diameter



|          |             |                                 |
|----------|-------------|---------------------------------|
| Capacity | Weight each | Order Code                      |
| 30ltr    | 11.1kg      | <b>KEN-540</b><br><b>-4600K</b> |

## Tilting Drum Cradle

Tilting Drum Cradle tips, rotates and locates 205ltr drums.

- Equipped with removable handle
- Powder coated finish.
- Large 2 1/2" (63mm) non-sparking wheels making it suitable for use on rough flooring in gas/fuel plants.
- Maximum load 600lbs (273kgs).
- Unit comes flat packed.

**Dimensions (H x W x L):**  
415 x 410 x 814mm.

**Weight:** 12.5kg.

|                                 |
|---------------------------------|
| Order Code                      |
| <b>KEN-540</b><br><b>-4400K</b> |



## Galvanised Drip Trays

Galvanised steel self-colour. Reinforced beaded rim - acts as carrying handle. Available in capacities of 5L and 8L in plain or with mesh cover.



**new**

| Description   | Internal Dimensions<br>Length x Width x Height | Weight each | Order Code<br><b>KEN-540</b> |
|---------------|--|-------------|------------------------------|
| 5L Plain Tray | 540 x 345 x 50mm                               | 1.05kg      | <b>-4210K</b>                |
| 5L With Mesh  | 540 x 345 x 50mm                               | 1.05kg      | <b>-4220K</b>                |
| 8L Plain Tray | 665 x 560 x 50mm                               | 2.7kg       | <b>-4250K</b>                |
| 8L With Mesh  | 665 x 560 x 50mm                               | 2.7kg       | <b>-4260K</b>                |

## LUBRICATION EQUIPMENT

**GROUP**  
**540**



## Direct Feed System

### Lever Type LP12.5

Direct high pressure lubricating system with centre pump, metal dust cover/lid with integral stabiliser and fixing mechanism. Flexible delivery tube with offset nozzle. Suitable for medium greases.

**Discharge per stroke:** 3.8cm<sup>3</sup>,  
**Tube length:** 375mm,  
**Inlet on pump max:** 260mm.  
Barrel (illustrated) available separately.



| Description | Capacity (kg) | Weight each | Order Code<br><b>KEN-540</b> |
|-------------|---------------|-------------|------------------------------|
| Feed System | 12.5          | 4.90kg      | <b>-0540K</b>                |
| Barrel      | 12.5          |             | <b>-0580K</b>                |

## High Pressure Grease Dispensing Pump

An easy to operate high pressure manual greasing system that is used to provide volume greasing where power is not available. Used for clean greasing of machinery, equipment and vehicles using grease up to and including NLGI 2. The pump has steel construction with aluminium cast head and solid steel pumping chamber. Complete with drum cover, follower plate, 1220mm (48") flexible grease hose fitted with professional 4-jaw coupler. For use with 12.5kg grease pails. Pump develops 3500psi (240bar) and delivers 1.25gm per stroke (1.2oz per 28 strokes).



|             |                                 |
|-------------|---------------------------------|
| Weight each | Order Code                      |
| 4.8kg       | <b>KEN-540</b><br><b>-3640K</b> |

## Waste Oil Collection

These items are for the collection of waste oil prior to disposal in accordance with your local authority regulations.

### Oil Drain Collector

This container is made of tough plastic, has an 8ltr capacity and can be closed for storage/transportation for disposal.

### Oil Drain Pans

This waste oil pan is made of tough plastic and has an 8 or 16ltr capacity.



| Type      | Size  | Shape  | Weight each | Order Code<br><b>KEN-540</b> |
|-----------|-------|--------|-------------|------------------------------|
| Collector | 8ltr  | Square | 1.13kg      | <b>-4500K</b>                |
| Pan       | 8ltr  | Round  | 1.14kg      | <b>-4520K</b>                |
| Pan       | 16ltr | Round  | 5.30kg      | <b>-4540K</b>                |

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**



**KENNEDY** Grease Guns
**Lever LG200**

Chrome plated steel body, handle and offset nozzle.  
Suction fill. Suitable for medium/heavy greases.

**Working pressure:** 3000psi/206bar.

**Diameter:** 45mm.

**Overall length:** 300mm.

**200cc**

| Capacity  | Weight | Order Code     |
|-----------|--------|----------------|
| Bulk Fill | each   | <b>KEN-540</b> |
| 200cc     | 900g   | <b>-0150K</b>  |


**Lever LG400**

Chrome-plated steel body, rubber grip and offset nozzle.  
Cartridge, bulk or suction fill.  
Suitable for medium/heavy greases.

**Working pressure:** 4500psi/310bar.

**Diameter:** 56mm.

**Overall length:** 370mm.

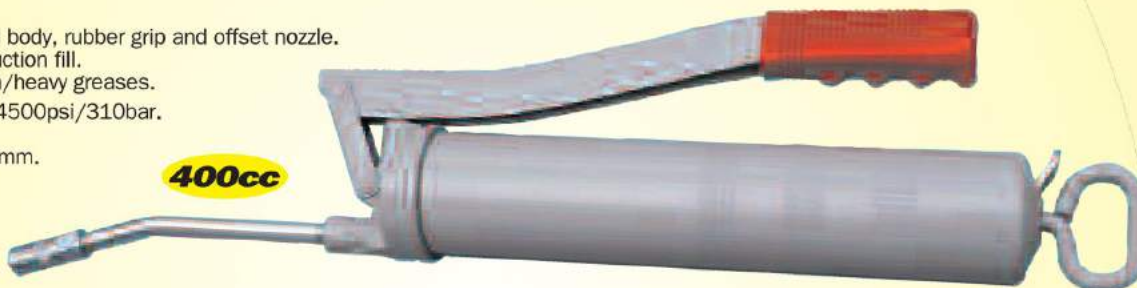**400cc**

| Capacity            | Weight | Order Code     |
|---------------------|--------|----------------|
| Bulk Fill Cartridge | each   | <b>KEN-540</b> |
| 400cc 400g/14oz     | 1.35kg | <b>-0250K</b>  |

**Lever LG500**

Chrome-plated steel body and handle, offset nozzle.  
Cartridge, bulk or suction fill.  
Suitable for medium/heavy greases.

**Working pressure:** 4500psi/310bar.

**Diameter:** 63mm.

**Overall length:** 352mm.

**500cc**

| Capacity            | Weight | Order Code     |
|---------------------|--------|----------------|
| Bulk Fill Cartridge | each   | <b>KEN-540</b> |
| 500cc 450g/16oz     | 1.50kg | <b>-0300K</b>  |

**Lever LG-PRO500**

Enamel finish steel body, offset nozzle.  
Cartridge, bulk or suction fill.  
Suitable for medium greases.

**Working pressure:** 6000psi/400bar.

**Diameter:** 56mm.

**Overall length:** 340mm.

**500cc**

| Capacity            | Weight | Order Code     |
|---------------------|--------|----------------|
| Bulk Fill Cartridge | each   | <b>KEN-540</b> |
| 500cc 400g/14oz     | 1.80kg | <b>-0340K</b>  |

**YAMOTO** Lever Type Grease Gun

Chrome-plated steel body, comfortable lever grip and offset nozzle.  
14oz cartridge, bulk or suction fill.  
Suitable for medium/heavy greases.

**Diameter:** 56mm.

**Overall length:** 370mm.

**400cc**

| Capacity            | Weight | Order Code     |
|---------------------|--------|----------------|
| Bulk Fill Cartridge | each   | <b>YMT-540</b> |
| 400cc 400g/14oz     | 1.25kg | <b>-0250K</b>  |



Robust metal body. Versatile one-hand operation. Supplied with universal nozzle connector for standard grease fittings.



| Capacity (cc) | Weight each | Order Code |
|---------------|-------------|------------|
| 35            | 258g        | -0020K     |
| 140           | 436g        | -0040K     |

**Grease Gun**
**Pom-Pom PP100**

Oil and acid resistant plastic body. Suction fill. Suitable for soft/medium greases.

**Diameter:** 35mm.  
**Overall length:** 220mm.



| Capacity (cc) | Weight each | Order Code |
|---------------|-------------|------------|
| 100           | 140g        | -0050K     |

**YAMOTO Steel Push-Type Grease Gun**
**PTG1200**

Bulk or suction fill. Corrosion protective electro-plated finish. Polished nozzle and galvanised plunger assembly. Suitable for medium or heavy greases.

| Capacity (cc) | Weight each | Order Code |
|---------------|-------------|------------|
| 120           | 415g        | -0030K     |


**Professional Grease Gun**
**Trigger TG120**

Chrome-plated steel body, straight nozzle. Cartridge or suction fill. Suitable for soft/medium greases.

**Working pressure:** 2900psi/200bar.

**Diameter:** 36mm.

**Overall length:** 253mm.



| Capacity Bulk Fill Cartridge | Weight each | Order Code |
|------------------------------|-------------|------------|
| 120                          | 760g        | -0100K     |

**Grease Guns**
**Trigger TG-PR0500**

Enamel finish steel body, straight nozzle. Cartridge, bulk or suction fill. Suitable for medium greases.

**Working pressure:** 3900psi/260bar.

**Diameter:** 56mm.

**Overall length:** 340mm.



| Capacity Bulk Fill Cartridge | Weight each | Order Code |
|------------------------------|-------------|------------|
| 500cc                        | 1.35kg      | -0320K     |

**Pneumatic Grease Gun**
**Pneumatic PG400**

Chrome-plated steel body, enamel finish gun, offset nozzle. Cartridge, bulk or suction fill. For plant and factory maintenance, fleet service etc. Can be connected to air brake systems on lorries. Suitable for medium greases.

**Working pressure:** 3600psi/250bar.

**Diameter:** 56mm.

**Overall length:** 400mm.



| Capacity (cc) | Weight each | Order Code |
|---------------|-------------|------------|
| 400           | 1.90kg      | -0360K     |

**LUBRICATION EQUIPMENT**
**GROUP 540**

**Piston-Type Grease Gun**
**GGP120**

Bulk or suction fill. Corrosion protective electro-plated finish. Galvanised plunger assembly. Suitable for medium or heavy greases.



| Capacity Bulk Fill Cartridge | Weight each | Order Code |
|------------------------------|-------------|------------|
| 120cc                        | 505g        | -0370K     |

**Steel Grease Gun**
**GGP400 - Pistol Type Grease Gun**

400g (14oz) cartridge, bulk or suction fill. Galvanised trigger body. Galvanised nozzle and plunger assembly. Air bleed button. Comfortable grip. Suitable for medium or heavy greases.



| Capacity Bulk Fill Cartridge | Weight each | Order Code |
|------------------------------|-------------|------------|
| 400cc                        | 1.50kg      | -0360K     |

**Pistol Type Adjustable Angle Pneumatic Grease Gun**
**PGC400**

360° handle rotation. Continuous flow. Chrome plated steel body and enamel finish gun. Offset nozzle. Suitable for medium grease. 14oz cartridge - bulk, suction or pump fill. Can be connected to the air brake systems on lorries. 1200 - 6000psi based on 30 - 150psi feed.



| Capacity (cc) | Weight each | Order Code |
|---------------|-------------|------------|
| 400           | 1.88kg      | -0350K     |

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**



GROUP  
**541/553**

## GREASE NIPPLES/MAGNETIC TOOLING

**KENNEDY**  
QUALITY INDUSTRIAL TOOLING

### Hydraulic Grease Nipple Kit

#### Contents

**Straight:**  
1/4" BSP,  
1/8" BSP,  
M8 x 1.25  
1/4" BSF.

**45°:**  
M8 x 1.25  
M10 x 1.50.

**90°:**  
1/4" BSF.

**140  
PIECES**



Order Code  
**KEN-541**

**-5140K**

### Flexible Hoses

For use with Kennedy grease guns, flexible hoses improve access in confined spaces, 1/8" BSP connecting threads.



| Bore x Length | Type         | Weight each | Order Code<br><b>KEN-540</b> |
|---------------|--------------|-------------|------------------------------|
| 150mm         | Offset Metal | 40g         | <b>-0390K</b>                |
| 8x230         | Nylon        | 30g         | <b>-0400K</b>                |
| 8x300         | Nylon        | 40g         | <b>-0410K</b>                |
| 8x500         | Nylon        | 40g         | <b>-0420K</b>                |
| 11x230        | Rubber       | 60g         | <b>-0430K</b>                |
| 11x300        | Rubber       | 70g         | <b>-0440K</b>                |
| 11x500        | Rubber       | 90g         | <b>-0450K</b>                |

### Magnetic Pick-Up Tools

#### Slimline Handle

Telescopic with magnetic tip and contoured handle



| Extended Length (mm) | Lifting Capacity | Weight each | Order Code<br><b>KEN-553</b> |
|----------------------|------------------|-------------|------------------------------|
| 550 (22")            | 1.8kg            | 50g         | <b>-0100K</b>                |

#### Pen Type Handle

Telescopic with magnetic tip and pen type handle with pocket clip



| Extended Length (mm) | Lifting Capacity | Weight each | Order Code<br><b>KEN-553</b> |
|----------------------|------------------|-------------|------------------------------|
| 650 (26")            | 1.8kg            | 40g         | <b>-0120K</b>                |

#### Multi-directional Head

Magnetic tipped multi-directional head and pen type handle



| Extended Length (mm) | Lifting Capacity | Weight each | Order Code<br><b>KEN-553</b> |
|----------------------|------------------|-------------|------------------------------|
| 580 (23")            | 680g             | 46g         | <b>-0140K</b>                |

#### Flexible Shaft

Magnetic tipped with full adjustable shaft and weighted handle



| Extended Length (mm) | Lifting Capacity | Weight each | Order Code<br><b>KEN-553</b> |
|----------------------|------------------|-------------|------------------------------|
| 455 (18")            | 500g             | 96g         | <b>-0130K</b>                |

### Hydraulic Grease Nipples

For use with Kennedy grease guns and all other hydraulic grease equipment.

#### Straight Hook-On



| Thread Size | Weight Per 100 | Order Code<br><b>KEN-541</b> |
|-------------|----------------|------------------------------|
| 1/8" BSP(T) | 1.30kg         | <b>-1070K</b>                |
| 1/4" BSP(T) | 2.00kg         | <b>-1090K</b>                |

#### 45° Type



| Thread Size | Weight Per 100 | Order Code<br><b>KEN-541</b> |
|-------------|----------------|------------------------------|
| 1/8" BSP(T) | 1.30kg         | <b>-0610K</b>                |
| 1/4" BSP(T) | 1.95kg         | <b>-0690K</b>                |
| 1/4" BSF    | 0.70kg         | <b>-0770K</b>                |
| M6 x 1      | 0.70kg         | <b>-0850K</b>                |
| M8 x 1.25   | 0.60kg         | <b>-0930K</b>                |
| M10 x 1.5   | 1.25kg         | <b>-1010K</b>                |

#### Straight Type



| Thread Size | Weight Per 100 | Order Code<br><b>KEN-541</b> |
|-------------|----------------|------------------------------|
| 1/8" BSP(T) | 0.60kg         | <b>-0600K</b>                |
| 1/4" BSP(T) | 1.10kg         | <b>-0680K</b>                |
| 1/4" BSF    | 0.30kg         | <b>-0760K</b>                |
| M6 x 1      | 0.30kg         | <b>-0840K</b>                |
| M8 x 1.25   | 0.50kg         | <b>-0920K</b>                |
| M10 x 1.5   | 0.60kg         | <b>-1000K</b>                |

#### 90° Type



| Thread Size | Weight Per 100 | Order Code<br><b>KEN-541</b> |
|-------------|----------------|------------------------------|
| 1/8" BSP(T) | 1.30kg         | <b>-0630K</b>                |
| 1/4" BSP(T) | 2.10kg         | <b>-0710K</b>                |
| 1/4" BSF    | 0.70kg         | <b>-0790K</b>                |
| M6 x 1      | 0.60kg         | <b>-0870K</b>                |
| M8 x 1.25   | 0.55kg         | <b>-0950K</b>                |
| M10 x 1.5   | 1.30kg         | <b>-1030K</b>                |

### Hydraulic Connectors

Securely grips the grease nipple while in use.

#### 4-Jaw



| Thread Size | Weight each | Order Code<br><b>KEN-541</b> |
|-------------|-------------|------------------------------|
| 1/8" BSP(T) | 40g         | <b>-0480K</b>                |

#### Hook-On



| Thread Size | Weight each | Order Code<br><b>KEN-541</b> |
|-------------|-------------|------------------------------|
| 1/8" BSP(T) | 40g         | <b>-0490K</b>                |



**KENNEDY**  
QUALITY INDUSTRIAL TOOLING

**Magnetic Trays**

For holding metal items such as nuts, bolts, washers etc.

**Dish**

For use in high and confined spaces with rubberised magnetic base mat to protect work surface.



| Size (mm) | Weight each | Order Code                      |
|-----------|-------------|---------------------------------|
| 150 dia.  | 375g        | <b>KEN-553</b><br><b>-0250K</b> |

**Rectangular Tray**

For holding larger items.



| Size (mm) | Weight each | Order Code                      |
|-----------|-------------|---------------------------------|
| 242 x 142 | 720g        | <b>KEN-553</b><br><b>-0300K</b> |

**Magnetic Parts Tray**

Rustproof stainless steel tray fitted with 4x 85mm magnets in a non-marking cover which attaches to any ferrous surface. For retaining hand tools and fasteners, ideal for preventing nuts, bolts and parts getting lost in assembly. Suitable for automotive mechanics, appliance repairs and most applications within the service and repair industry.

**Size:** 295 x 270 x 42mm.



Bottom of tray

| Weight each | Order Code                      |
|-------------|---------------------------------|
| 1.60kg      | <b>KEN-553</b><br><b>-0270K</b> |

**Magnetic Pick-up Wand**

High power magnet for easy pick-up and release of metal objects. Can be used for scrap and ferrous debris. Permanent magnet, never needs to be re-magnetised. Lightweight. Chrome-plated and corrosion-resistant.

**Maximum lifting weight:** 14lbs/6.35kg.



| Working Length | Weight each | Order Code                      |
|----------------|-------------|---------------------------------|
| 140mm          | 567g        | <b>KEN-553</b><br><b>-0200K</b> |

**Magnetic Vee Block**

Ideal for holding cylindrical workpieces for grinding application. The adhesion will simultaneously hold the workpiece and vee-block to any flat ferrous surface.

**Dimensions (W x L x H):**  
70 x 102 x 95mm.



| Magnetic Adhesion | Weight each | Order Code                      |
|-------------------|-------------|---------------------------------|
| 50kgf             | 4.00kg      | <b>KEN-554</b><br><b>-1100K</b> |

**Magnetic Link**

Two magnetic units joined by an adjustable steel strap (82mm long). Capable of holding at many different angles.

**Single link base dimensions (L x H x W):**  
60 x 30 x 25mm.



| Magnetic Adhesion | Weight each | Order Code                      |
|-------------------|-------------|---------------------------------|
| 13kgf             | 350g        | <b>KEN-554</b><br><b>-1400K</b> |

**Claw/Magnetic Pick-up Tool with LED**

Flexible spring steel stem with magnetic tip, ideal for recovery of small objects. Four retractable adjustable steel claws. Fitted with LED. Chrome plated and corrosion-resistant. Magnetic pull 1kg. Includes 3x LR44 batteries and battery protector.

**new**

| Product Number | Length (mm) | Order Code                      |
|----------------|-------------|---------------------------------|
| PTM600         | 600         | <b>KEN-553</b><br><b>-0340K</b> |

**Telescopic Magnetic Pick-up Tool with LED**

Telescopic with flexible head and magnets fitted to head and base. Fitted with LED. Knurled grip. Pocket size. Belt grip. Magnetic pull 2.27kg. Includes 4x LR44 batteries and battery protector.

**new**



| Product Number | Extendable Length | Order Code                      |
|----------------|-------------------|---------------------------------|
| KTM583         | 175 - 583mm       | <b>KEN-553</b><br><b>-0360K</b> |

**MAGNETIC TOOLING**

**Magnetic Pick-up Tool**

High power magnet for easy pick-up and release of metal objects. Can be used for scrap and ferrous debris. Spring-loaded magnet release. Permanent magnet, never needs to be re-magnetised.

**Maximum lifting weight:**  
10lbs/4.5kg.



| Working Size | Weight each | Order Code                      |
|--------------|-------------|---------------------------------|
| 100mm dia.   | 634g        | <b>KEN-553</b><br><b>-0160K</b> |

**Magnetic Long Reach**

Long reach handle. High power magnet for easy pick-up and release of metal objects. Can be used for scrap and ferrous debris. Spring-loaded magnet release. Permanent magnet, never needs to be re-magnetised.

**Maximum lifting weight:**  
8lbs/3.6kg.



| Working Size | Weight each | Order Code                      |
|--------------|-------------|---------------------------------|
| 90mm Dia.    | 693g        | <b>KEN-553</b><br><b>-0180K</b> |

**Magnet Extending Pick-up Sweeper**

High power magnet for easy pick-up and release of metal objects. Can be used for scrap and ferrous debris. Permanent magnet, never needs to be re-magnetised. Lightweight. Chrome-plated and corrosion-resistant.

**Maximum lifting weight:**  
20lbs/9.0kg.



| Working Length | Weight each | Order Code                      |
|----------------|-------------|---------------------------------|
| 104cm          | 1430g       | <b>KEN-553</b><br><b>-0220K</b> |

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**



**KENNEDY** Magnetic Hold Fast

Positive gripping pot magnets supplied with screw-down release handle. Can be used singly or in multiples for making welding or other jigs. With M8 x 1.25 thread.

Depth: 35mm.



| Dia.<br>(mm) | Magnetic<br>Adhesion | Weight<br>each | Order Code<br>KEN-554 |
|--------------|----------------------|----------------|-----------------------|
| 40           | 20kgf                | 590g           | -1200K                |
| 50           | 40kgf                | 955g           | -1240K                |

**Magnetic Quick Clamp**

For fast accurate holding.

Dimensions  
(W x L x T):  
65 x 110 x  
15mm.



| Angles          | Weight<br>each | Order Code<br>KEN-554 |
|-----------------|----------------|-----------------------|
| 30°, 90° & 135° | 270g           | -1700K                |

**Channel Magnet**

Designed to give maximum grip within channels or slots. Able to grip non-uniform workpieces.



| Dimensions<br>L x W x H (mm) | Weight<br>each | Order Code<br>KEN-554 |
|------------------------------|----------------|-----------------------|
| 130 x 30 x 13                | 250g           | -3500K                |

**Magnetic Holder**

Incorporates vee and plain faces. Enables accurate positioning of workpieces relative to each other, also secures sheets, bars and tubes.


Dimension  
(W x L x H):  
108 x 108  
x 104mm.



| Magnetic<br>Adhesion | Weight<br>each | Order Code<br>KEN-554 |
|----------------------|----------------|-----------------------|
| 100kgf               | 6.00kg         | -1300K                |

**Magnetic Chuck Blocks**

For use with magnetic chucks that have parallel poles, so that the magnetic field can be extended to hold awkwardly shaped workpieces. Supplied in matched pairs. Machinable.

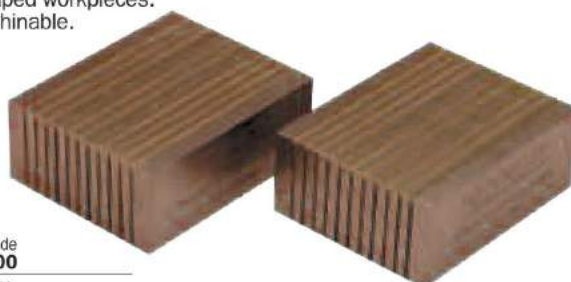

| Dimensions<br>W x L x H | Weight<br>each | Order Code<br>KEN-400 |
|-------------------------|----------------|-----------------------|
| 60 x 75 x 30mm          | 1.50kg         | -2500K                |

**Power Magnets**

A square horseshoe magnet. Supplied with plain fixing holes.

Kg pull (max):  
25mm - 4.5, 30mm -  
9.0, 40mm - 11.8.



| Size<br>(mm)   | Weight<br>each | Order Code<br>KEN-553 |
|----------------|----------------|-----------------------|
| 25 x 40 x 20   | 60g            | -8120K                |
| 30 x 45 x 30   | 120g           | -8130K                |
| 40.5 x 57 x 35 | 180g           | -8140K                |

**Ferrite Shallow Pot Magnets**

Manufactured from ceramic ferrite material. Suitable for holding machine tool accessories with M6 threads or building into jigs.

Heavy Duty L-bolt



| Ø x Width<br>(mm) | Weight<br>each | Order Code<br>KEN-553 |
|-------------------|----------------|-----------------------|
| 66 x 10.7         | 220g           | -7020K                |
| 76 x 12.5         | 300g           | -7040K                |
| 100 x 15.5        | 610g           | -7060K                |

J-bolt



| Size<br>(mm) | Weight<br>each | Order Code<br>KEN-553 |
|--------------|----------------|-----------------------|
| 46 x 10.7    | 90g            | -8900K                |
| 56 x 10.7    | 130g           | -8910K                |
| 66 x 10.7    | 190g           | -8920K                |

**Bar Magnets**

A range of one-piece cylindrical magnets with opposing poles at either end. Permanently magnetic.



| Dia.<br>(mm) | Depth<br>(mm) | Weight<br>Per 100 | Order Code<br>KEN-553 |
|--------------|---------------|-------------------|-----------------------|
| 6.0          | 20 (3/4")     | 0.44kg            | -8050K                |
| 8.0          | 25 (1")       | 1.00kg            | -8060K                |
| 10.0         | 30 (1 1/8")   | 1.90kg            | -8070K                |

**Button Magnets**

A horseshoe type cylindrical magnet. Opposing poles are at the same end of the magnet separated by a slot. Supplied with a plain bore and keeper. Permanently magnetic.



| Diameter<br>(mm) | Depth<br>(mm) | Weight<br>Per 100 | Order Code<br>KEN-553 |
|------------------|---------------|-------------------|-----------------------|
| 12.7 (1/2")      | 9.5           | 0.87kg            | -8210K                |
| 20 (3/4")        | 12.5          | 2.00kg            | -8220K                |
| 25 (1")          | 16.0          | 5.60kg            | -8230K                |
| 32 (1 1/4")      | 19.5          | 13.0kg            | -8240K                |

**Shallow Pot Magnets**

North polarity in centre separated from opposing pole by a continuous slot. For use in areas of restricted height. Supplied with plain bore fixing hole/keeper. Permanently magnetic.



| Diameter<br>(mm) | Depth<br>(mm) | Weight<br>Per 100 | Order Code<br>KEN-553 |
|------------------|---------------|-------------------|-----------------------|
| 20 (3/4")        | 7.8           | 1.75kg            | -8260K                |
| 28.5 (1 1/8")    | 8.7           | 4.70kg            | -8270K                |
| 38 (1 1/2")      | 10.6          | 9.70kg            | -8280K                |

**Deep Pot Magnets**

North polarity in centre separated from opposing pole by a continuous slot. Ideally suited for gripping applications. Supplied with M5 x 1 threaded bore fixing hole and keeper. \*M3 x 0.5



| Diameter<br>(mm) | Depth<br>(mm) | Weight<br>Per 100 | Order Code<br>KEN-553 |
|------------------|---------------|-------------------|-----------------------|
| 9.5 (3/8")*      | 15.1          | 2.00kg            | -8290K                |
| 17.5 (11/16")    | 16.0          | 2.70kg            | -8310K                |
| 20 (3/4")        | 18.0          | 4.50kg            | -8320K                |
| 27 (1 1/16")     | 25.4          | 9.80kg            | -8330K                |
| 35 (1 3/8")      | 30.0          | 28.9kg            | -8340K                |

Set

2 each: 12.7mm button.  
1 each: 17.5mm deep button,  
20mm button and 20mm pot.

5  
PIECES



| Weight<br>each | Order Code<br>KEN-553 |
|----------------|-----------------------|
| 90g            | -9000K                |



**1/4"** Micrometer style adjustment allows easy accurate setting. Slipping action eliminates overtightening. Adjustment ring auto disengages when in use to prevent accidental adjustment. Stainless steel shafts. Anodised aluminium handles. Suitable for electrical, electronics and instrument assembly works. Manufactured to **ISO 6789 : 2003. (Accuracy  $\pm 6\%$  of reading).**

### Minor Type



| Product Number | Torque Range<br>cNm | Range<br>ozf.in | Weight each | Order Code<br>KEN-555 |
|----------------|---------------------|-----------------|-------------|-----------------------|
| QS1.2MH        | 20-120              | -               | 165g        | -5010K                |
| QS1.2IH        | -                   | 20-120          | 165g        | -5020K                |
| QS9FH          | 490 -               | -               | 335g        | -5520K                |
| QS80FH         | -                   | 1.875-5         | 335g        | -5540K                |

### Standard Type


**1/4"** Can be used with  $\frac{1}{4}$ " hexagon drive. Sliding 'T' bar supplied.



| Product Number | Torque Range<br>Nm | Range<br>lbf.in | Weight each | Order Code<br>KEN-555 |
|----------------|--------------------|-----------------|-------------|-----------------------|
| QS6MH          | 1 - 6              | -               | 335g        | -5600K                |
| QS50IH         | -                  | 5 - 50          | 335g        | -5500K                |

## Torque Limiting Screwdrivers

L" A/F female hexagon socket which will accept screwdriver bits. Can be converted to a male end by using the appropriate adaptor. Can be pre-set to any torque value within range by using a Torque Calibration Analyser. Can be fitted with 'impact-free resetting' option. Manufactured to **ISO 6789 : 2003. (Repeatability at  $\pm 6\%$  of set torque).**

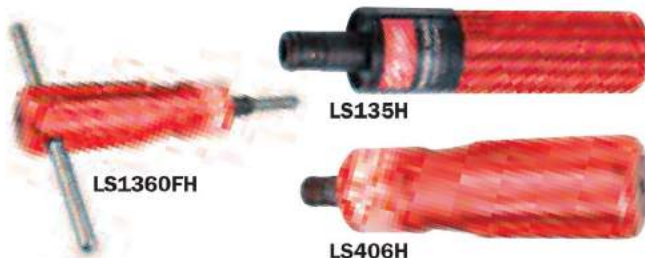

| Product Number | Torque Range<br>cNm | Range<br>lbf.in | Weight each | Order Code<br>KEN-555 |
|----------------|---------------------|-----------------|-------------|-----------------------|
| LS135H         | 2-135               | 12              | 200g        | -5700K                |
| LS406H         | 6-406               | 36              | 300g        | -5800K                |
| LS1360FH       | 2.5-13.6            | 22              | 325g        | -5680K                |

## Pre-settable Torque Breaking Handle - Spigot Type

Handle 'breaks' at an angle of  $20^\circ$  and features a unique patented single direction mechanism, ensuring long tool life and repeatable accuracy. Fitted with the new mechanical torque adjustment locking device. Automatically resets when force is released and returns to the in-line position. Manufactured to **ISO 6789 : 2003. (Repeatability at  $\pm 4\%$  of reading tools above 10Nm and  $\pm 6\%$  for tools less than 10Nm).**

Overall length: 265mm.



### Mechanical Torque Adjustment Locking Device

- Easy-to-use locking device for the torque adjusting screws.
- Does not rely on friction to arrest movement.
- Operated using a single adjusting key.



Compatible with the Norbar® 16mm Spigot End fittings.

| Product Number | Torque Range<br>Nm | Range<br>lbf.in | Spigot Size | Weight each | Order Code<br>KEN-555 |
|----------------|--------------------|-----------------|-------------|-------------|-----------------------|
| BH25           | 5.0-25             | 44-221          | 16mm        | 415g        | -5900K                |

## Dial Indicating Torque Drivers

Can indicate torque in two ways - measures and displays torque as it is applied, or measures and displays the maximum torque used, after it has been applied. Ideal for the electronics, electrical and domestic appliance industries. Stainless steel shafts coloured aluminium handles and scaled nylon dials.  $\frac{1}{4}$ " hex drive. Dual scale. Manufactured to **ISO 6789 : 2003. (Accuracy  $\pm 6\%$  of reading).**



### Minor Type **1/4"**

| Product Number | Torque Range<br>cNm | Range<br>ozf.in | Weight each | Order Code<br>KEN-555 |
|----------------|---------------------|-----------------|-------------|-----------------------|
| S50H           | 10 - 50             | 14 - 70         | 190g        | -8050K                |
| S100H          | 20 - 100            | 28 - 140        | 190g        | -8100K                |

### Standard Type

Can be used with  $\frac{1}{4}$ " drive. Sliding 'T' bar supplied.



| Product Number | Torque Range<br>cNm | Range<br>lbf.in | Weight each | Order Code<br>KEN-555 |
|----------------|---------------------|-----------------|-------------|-----------------------|
| S250H          | 50 - 250            | 4 - 20          | 465g        | -8250K                |
| S500H          | 100 - 500           | 8 - 40          | 465g        | -8500K                |

## $\frac{1}{4}$ " Square Drive Slipper Wrenches

**1/4"** Micrometer style fine adjustment with positive locking system. Automatic resetting with audible click when the wrench slips. Accurate repeatability. Aircraft specification stainless steel heads, aluminium handles. Designed to operate in any environment from the toughest engineering production line to fine finish assembly areas. Manufactured to **ISO 6789 : 2003.**



| Product Number | Torque Range<br>Nm | Increment | Weight each | Order Code<br>KEN-555 |
|----------------|--------------------|-----------|-------------|-----------------------|
| TCW5           | 1 - 5              | 0.05Nm    | 235g        | -7050K                |
| TCW10          | 2 - 10             | 0.10Nm    | 235g        | -7100K                |

## Production Slipper Torque Wrenches

Wrench 'slips' when predetermined torque setting is reached, completely eliminating overtightening. Fitted with Mechanical Torque Adjustment Locking Device. Accurate repeatability guarantees equal tightness every time. Incorporates a specially designed multi-Hobed cam which automatically resets the wrench after a small movement of the handle, allowing quick progress to the next operation. Incorporates a fully supported ratchet giving smooth, positive torque control, even in confined spaces. Lightweight for less operator fatigue. Manufactured to **ISO 6789 : 2003. (Repeatability at  $\pm 4\%$  of reading).**



### Mechanical Torque Adjustment Locking Device

- Easy-to-use locking device for the torque adjusting screws.
- Positive, mechanical locking system.
- Does not rely on friction to arrest movement.
- Operated using a single adjusting key.



| Product Number | Torque Range<br>Nm | Length<br>lbf/ft | Ratchet Size<br>(mm) | Order Code<br>KEN-555 |
|----------------|--------------------|------------------|----------------------|-----------------------|
| MPW125         | 40 - 125           | 30 - 90          | 460                  | -4000K                |
| SPW25          | 3 - 25             | 2 - 18           | 216                  | -4050K                |
| SPW55          | 15 - 55            | 10 - 40          | 325                  | -4070K                |
| TPW25          | 3 - 25             | 2 - 18           | 216                  | -4100K                |

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**

© 2018



Reversible ratchet head. 'Click + Snap' action indicates when the pre-set torque level has been reached. Engraved kgf.m and Nm scale on barrel. Micrometer type sleeve allows preset torque values to be accurately set. Manufactured to **ISO 6789:2003 (BS EN 26789:2003)**



1/4 3/8 1/2

| Overall Length | Sq. Drive | Torque Range |          | Order Code    |
|----------------|-----------|--------------|----------|---------------|
|                |           | Nm           | kgf.m    |               |
| 280mm*         | 1/4"      | 5-25         | 0.5-2.5  | <b>-0300K</b> |
| 365mm          | 3/8"      | 19-110       | 1.9-11.2 | <b>-0400K</b> |
| 440mm          | 1/2"      | 42-210       | 4.2-21.4 | <b>-0500K</b> |

## TRI TORQ Adjustable Torque Wrench

Manufactured from high quality satin finish steel with a polished steel head. Supplied with a fully traceable calibration certificate and storage case. The desired torque value can be set, and is displayed in windows on the handle. Manufactured to **BS EN 26789 : 1994 and Federal GGG-W-686 standards.**



Supplied in Robust Storage Case



1/4 3/8 1/2

| Model Number | Sq. Drive | Torque Range |        | Weight each | Order Code    |
|--------------|-----------|--------------|--------|-------------|---------------|
|              |           | Nm           | lbf.ft |             |               |
| FXL5         | 1/4"      | 1-5          | 0.7-3  | 0.40kg      | <b>-5740K</b> |
| FXL32        | 1/4"      | 6-30         | 4-22   | 0.40kg      | <b>-5760K</b> |
| FXL33        | 3/8"      | 6-30         | 4-22   | 0.40kg      | <b>-5850K</b> |
| FXL63        | 3/8"      | 12-60        | 7-44   | 1.30kg      | <b>-5870K</b> |
| FXL100       | 3/8"      | 20-100       | 15-75  | 1.38kg      | <b>-5900K</b> |
| FXL200       | 1/2"      | 40-200       | 30-150 | 2.36kg      | <b>-6900K</b> |
| FXL320       | 1/2"      | 60-320       | 45-225 | 2.57kg      | <b>-6920K</b> |

With Factory Tested Calibration Certificate

### Ratchet Repair Kits

| To Suit       | Order Code    |
|---------------|---------------|
| FXL100        | <b>-5900K</b> |
| FXL200/FXL320 | <b>-6900K</b> |

## KENNEDY Adjustable Torque Wrenches

High quality chrome-plated, polished steel head and retractable torque setting lever. 'Click and Snap' action indicates when the pre-set torque level has been reached. Four easy read scales Nm, kgf.m, lbf.in x10, lbf.ft. Push through square drive connector to instantly reverse action. Knurled grip plastic handle. Complete with factory tested calibration certificate, operating instructions and torque conversion chart. Supplied in a cardboard case.

Manufactured to **ISO 6789 : 2003 (BS EN 26789 : 2003)**. Accuracy =  $\pm 4\%$ .



With Factory Tested Calibration Certificate

| Model Number | Square Drive | Torque Range |           | Length (mm) | Order Code    |
|--------------|--------------|--------------|-----------|-------------|---------------|
|              |              | Nm           | lbf.ft    |             |               |
| MTW011       | 3/8"         | 2.5 - 11     | 2 - 8     | 300         | <b>-3500K</b> |
| MTW033       | 3/8"         | 5.0 - 33     | 4 - 24    | 410         | <b>-3520K</b> |
| MTW068       | 3/8"         | 12.0 - 68    | 10 - 50   | 480         | <b>-3540K</b> |
| MTW135       | 1/2"         | 25 - 135     | 20 - 100  | 560         | <b>-3560K</b> |
| MTW225       | 1/2"         | 50 - 225     | 40 - 160  | 610         | <b>-3580K</b> |
| MTW330       | 1/2"         | 70 - 330     | 50 - 250  | 780         | <b>-3600K</b> |
| MTW810       | 3/4"         | 200 - 800    | 145 - 600 | 940         | <b>-3610K</b> |

### Torque Conversion Factors

| To From | International System S.I. |       |        | Inch   |        |         | Metric |        |         |
|---------|---------------------------|-------|--------|--------|--------|---------|--------|--------|---------|
|         | mNm                       | cNm   | Nm     | Ozf.in | lbf.in | lbf.ft  | gf.cm  | kgf.cm | kgf.m   |
| mNm     | 1                         | 0.1   | 0.001  | 0.142  | 0.009  | 0.0007  | 10.2   | 0.01   | 0.0001  |
| cNm     | 10                        | 1     | 0.01   | 1.416  | 0.088  | 0.007   | 102    | 0.102  | 0.001   |
| Nm      | 1000                      | 100   | 1      | 141.6  | 8.851  | 0.738   | 10197  | 10.20  | 0.102   |
| Ozf.in  | 7.062                     | 0.706 | 0.007  | 1      | 0.0625 | 0.005   | 72     | 0.072  | 0.0007  |
| lbf.in  | 113                       | 11.3  | 0.113  | 16     | 1      | 0.083   | 1152.1 | 1.152  | 0.0115  |
| lbf.ft  | 1356                      | 135.6 | 1.356  | 192    | 12     | 1       | 13826  | 13.83  | 0.138   |
| gf.cm   | 0.098                     | 0.01  | 0.0001 | 0.014  | 0.0009 | 0.00007 | 1      | 0.001  | 0.00001 |
| kgf.cm  | 98.07                     | 9.807 | 0.098  | 13.89  | 0.868  | 0.072   | 1000   | 1      | 0.01    |
| kgf.m   | 9807                      | 980.7 | 9.807  | 1389   | 86.8   | 7.233   | 100000 | 100    | 1       |

EXAMPLE: To convert 10 lbf.ft to Nm, read across (units to be converted from) and down (units to be converted to) as shown above to obtain

Torque Conversion Factor.

Number of Units to be Converted x Conversion Factor = Total Converted Units  
i.e: 10 lbf.ft x 1.356 = 13.56 Nm

Note: The unit Kilogramme Force (kgf.m) is also known as Kilopond (kp.m), 1kgf.m=1kp.m





### Dial Indicating Torque Wrenches



Ideal for use in inspection and quality control, research and development, production and after sales service. Lightweight aluminium handles, abrasive resistant bodies for longer life and easy read dual scale for observing the amount of torque applied throughout the tightening process. Socket not included. Manufactured to **ISO 6789 : 2003. (Accuracy  $\pm 4\%$  of reading).**

**1/4" Square Drive** Not suitable for use with extensions.



| Product Number | Torque Range |             | Weight each | Order Code    |
|----------------|--------------|-------------|-------------|---------------|
|                | Nm           | lbf.in      |             |               |
| TW4            | 0.8 - 4.0    | 7 - 35      | 520g        | <b>-1040K</b> |
| TW8            | 1.6-8        | 14-75lbf.in | 520g        | <b>-1060K</b> |
| TW12           | 2.4 - 12     | 24 - 120    | 520g        | <b>-1120K</b> |

**3/8" Square Drive** (not illustrated)

| Product Number | Torque Range |          | Weight each | Order Code    |
|----------------|--------------|----------|-------------|---------------|
|                | Nm           | lbf.in   |             |               |
| SW25           | 5 - 25       | 48 - 240 | 520g        | <b>-1250K</b> |
| SW40           | 8 - 40       | 72 - 360 | 520g        | <b>-1400K</b> |

**3/4" Square Drive**  
With built-in audio/visual signal.



**1/2" Square Drive**



| Product Number | Torque Range |        | Weight each | Order Code    |
|----------------|--------------|--------|-------------|---------------|
|                | Nm           | lbf.ft |             |               |
| MW80           | 16-80        | 12-60  | 1.35kg      | <b>-2140K</b> |
| MW100          | 32-160       | 24-120 | 1.41kg      | <b>-2160K</b> |

| Product Number | Torque Range |          | Weight each | Order Code    |
|----------------|--------------|----------|-------------|---------------|
|                | Nm           | lbf.ft   |             |               |
| MW160          | 20-100       | 14-70    | 1.41kg      | <b>-2180K</b> |
| MW80           | 16 - 80      | 12 - 60  | 1.35kg      | <b>-2080K</b> |
| MW200          | 40 - 200     | 30 - 160 | 1.40kg      | <b>-2200K</b> |
| MW400          | 80-400       | 60-300   | 3.2kg       | <b>-2300K</b> |

| Product Number | Torque Range |           | Weight each | Order Code    |
|----------------|--------------|-----------|-------------|---------------|
|                | Nm           | lbf.ft    |             |               |
| LW800          | 160 - 800    | 120 - 660 | 4.85kg      | <b>-3800K</b> |



### Torque Calibration Analyser



Clear easy to use scales. Specifically designed to set and calibrate most makes of torque tools. Mechanism is totally enclosed in a die-cast aluminium housing. Repeatable accuracy to  $\pm 2\%$  of reading. Memory pointer and built-in needle shock absorber. Single direction mechanism for clockwise use. The preferred and certified ranges of these torque calibration analysers meet the specified measuring range as detailed in **ISO 6789 : 2003.**



**With Factory Tested Calibration Certificate**

| Torque Range |               | Scale Sub Divisions | Order Code    |
|--------------|---------------|---------------------|---------------|
| ISO (Nm)     | lbf.in        |                     |               |
| 26-130cNm    | 36-180 ozf.in | 2cNm/20zft/in       | <b>-6600K</b> |
| 0.8-4        | 7.2-36 lbf.in | 0.05Nm/0.5lbf.in    | <b>-6640K</b> |
| 2.4-12       | 24-120 lbf.in | 0.2Nm/2lbf.in       | <b>-6660K</b> |
| 5.0-25       | 44-220 lbf.in | 0.5Nm/5lbf.in       | <b>-6700K</b> |



### Torque Multipliers

Ideal for applications where no electrical or air supply is available. Enables precision tightening of threaded fasteners. Aids the loosening of nuts that are corroded or seized. Accurate to within  $\pm 4\%$ , taking the uncertainty out of high torque tightening.

**TN14: Input: 1/2" sq. drive. Output: 3/4" sq. drive.**  
**TN27: Input: 3/4" sq. drive. Output: 1" sq. drive.**



**6:1 - Maximum Torque 1680Nm**



**5.4:1 - Maximum Torque 2700Nm**

| Product Number | Maximum Torque | Weight each | Order Code    |
|----------------|----------------|-------------|---------------|
| TN14           | 1500Nm         | 6.1kg       | <b>-3620K</b> |
| TN27           | 2700Nm         | 7.3kg       | <b>-3630K</b> |



### Angular Torque Gauge



The gauge has an easy to read 360° scale in 2°, 10° and 30° increments and has an Indicator etched into the clear plastic. An adjustable arm to keep the angled scale stationary, with a long and short side for flexibility in positioning against components.



**1/2"**

| Product Number | Capacity Nm | Weight each | Order Code    |
|----------------|-------------|-------------|---------------|
| TGA360         | 0 - 360     | 180g        | <b>-0150K</b> |

### Nut Spinners

Manufactured from hardened and tempered chrome vanadium steel, with satin chrome finish. Oil and acid resistant high impact plastic handles. 6" (150mm) combined socket and blade length.


**Overall length: 230mm.**



| Type   | Hexagon AF  | Order Code    |
|--------|-------------|---------------|
| Metric | 4.0mm       | <b>-7400K</b> |
|        | 4.5mm       | <b>-7450K</b> |
|        | 5.0mm       | <b>-7500K</b> |
|        | 5.5mm       | <b>-7550K</b> |
|        | 6.0mm       | <b>-7600K</b> |
|        | 7.0mm       | <b>-7700K</b> |
|        | 8.0mm       | <b>-7800K</b> |
|        | 9.0mm       | <b>-7900K</b> |
|        | 10.0mm      | <b>-8100K</b> |
|        | 0BA (.413") | <b>-1200K</b> |
| BA     | 1BA (.365") | <b>-1210K</b> |
|        | 2BA (.324") | <b>-1220K</b> |
|        | 3BA (.282") | <b>-1230K</b> |
|        | 4BA (.248") | <b>-1240K</b> |
|        | 5BA (.220") | <b>-1250K</b> |
|        | 6BA (.193") | <b>-1260K</b> |

### Sets

| Number of Pieces | Contents                             | Order Code    | Price/Set |
|------------------|--------------------------------------|---------------|-----------|
| 7                | 0, 1, 2, 3, 4<br>5 & 6BA             | <b>-9520K</b> |           |
| 9                | 4, 4.5, 5, 5.5, 6,<br>7, 8, 9 & 10mm | <b>-9620K</b> |           |



**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**



Preset Torque  
Screwdriver

new

-8600K



-8640K



-8660K



| Product Number | Torque Range (Nm) | Length (mm) | Order Code KEN-555 |
|----------------|-------------------|-------------|--------------------|
| P150FH         | 0.2-1.5           | 138         | -8600K             |
| P450FH         | 0.5-1.5           | 138         | -8620K             |
| P25FH          | 0.05-0.25         | 132         | -8640K             |
| E25FH          | 0.05-0.25         | 132         | -8660K             |
| P150FH         | 0.2-1.5           | 132         | -8680K             |
| E150FH         | 0.2-1.5           | 132         | -8700K             |
| P450FH         | 0.5-4.5           | 140         | -8720K             |
| E450FH         | 0.5-4.5           | 140         | -8740K             |
| P1350FH        | 2.5-13.5          | 140         | -8760K             |
| E1350FH        | 2.5-13.5          | 140         | -8780K             |

## Slipping Wrench

These TSC Adjustable Wrenches improve control of the fastening process by reducing the risk of both under and over tightening; this is achieved by the unique slipping mechanism. Its slim line and compact design maximizes productivity in restricted spaces as well as being long lasting and durable. EPA Compliant for use in Electrostatically Sensitive Applications.

new



| Product Number | Torque Range lbf.ft | Length (mm) | Order Code KEN-555 |
|----------------|---------------------|-------------|--------------------|
| TCW45          | 10 to 45            | 195         | -7150K             |
| TCW90          | 20 to 90            | 195         | -7200K             |

## Breaking Torque Wrenches

These TBN Breaking Wrenches improve control of the fastening process by reducing the risk of both over and under tightening; this is achieved by the unique breaking mechanism. Its slim line and compact design maximizes productivity in restricted spaces as well as staying durable.

new



| Product Number | Torque Range Nm | lbf.ft   | Length (mm) | Order Code KEN-555 |
|----------------|-----------------|----------|-------------|--------------------|
| 050100         | 10 - 65         | 78 - 48  | 302         | -9000K             |
| 050200         | 27 - 135        | 18 - 100 | 408         | -9010K             |
| 050300         | 40 - 200        | 29 - 147 | 520         | -9020K             |

## Adjustable Torque Screwdriver

Achieve accurate torque application by eliminating both under and over tightening. These Calibrated Torque Screwdrivers are fast and accurate to set by using the quick and clear to read micrometer setting scale. Wide torque range and long service life is provided through the durable design utilising hard wearing materials such as stainless steel and aluminum. Ideal for safe electronic component assembly as this tool is EPA compliant for use in Electrostatically Sensitive Areas.

new



| Product Number | Torque Range (Nm) | Length (mm) | Order Code KEN-555 |
|----------------|-------------------|-------------|--------------------|
| QS120FH        | 0.2-1.2           | 183         | -5920K             |
| QS600FH        | 1-6               | 196         | -5940K             |
| QS900FH        | 4-9               | 196         | -5960K             |
| QS40FH         | 0.08-0.4          | 159         | -5980K             |

## TLS Clean Room Torque Screwdrivers

Designed to protect precision products from contamination during assembly, utilising PTFE impregnated sealed anodised aluminium handles. These Torque Screwdrivers are designed specifically for use in Clean Rooms by utilising suitable surface treatments and incorporating high performance seals in their design. Suitable for use by operators of any skill level, as these tools will repeatedly deliver the set torque without the need for operator intervention.

new



| Product Number | Torque Range (Nm) | Order Code KEN-555 |
|----------------|-------------------|--------------------|
| 100-0022FH     | 0.02-0.22         | -8800K             |
| 100-0135FH     | 0.11-1.35         | -8820K             |
| 100-0406FH     | 0.16-4.06         | -8840K             |
| 100-1360FH     | 1.35-13.6         | -8860K             |

## Preset Torque Slipping Wrench

Preset Slipping Torque Wrenches ensure accurate process control is guaranteed by eliminating under and over tightening. Process control can be further enhanced by using the Signal Output versions (Sw) to confirm the correct torque has been applied to a particular fastener. Accuracy +/- 6% of reading. ISO 6789 Classification 2C. EPA Compliant for use in Electrostatically Sensitive Applications.

new



| Product Number | Torque Range (Nm) | Length (mm) | Order Code KEN-555 |
|----------------|-------------------|-------------|--------------------|
| SP5            | 1 to 5            | 185         | -7250K             |
| SP10           | 2 to 10           | 185         | -7300K             |

## 1/4-inch Square Drive Ratchet


This tool is a reversible 1/4-inch Square Drive Ratchet suitable for use with the breaking torque handles.

new



| Product Number | Torque Range Nm | Order Code KEN-555 |
|----------------|-----------------|--------------------|
| 011100         | 0.4-10          | -9030K             |
| 011200         | 0.4-10          | -9040K             |



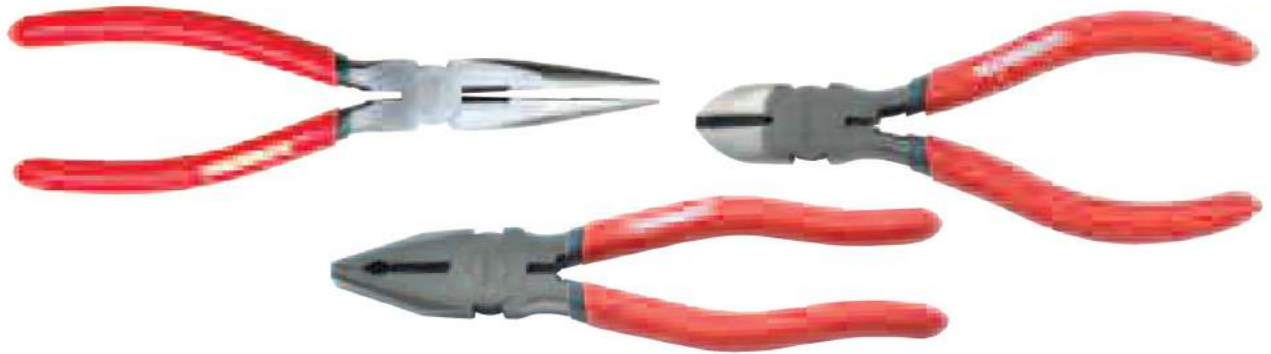

| Contents               | Product Number | Weight each | Order Code     |
|------------------------|----------------|-------------|----------------|
| Long Nose 160mm        | 558-321        |             | <b>KEN-558</b> |
| Diagonal Cutters 160mm | 558-332        | 490g        | <b>-9830K</b>  |
| Combination 160mm      | 558-352        |             |                |



| Contents                | Product Number | Weight each | Order Code     |
|-------------------------|----------------|-------------|----------------|
| Adjustable Wrench 150mm | 501-106        |             | <b>KEN-558</b> |
| Diagonal Cutters 160mm  | 558-332        | 490g        | <b>-9820K</b>  |
| Combination 160mm       | 558-353        |             |                |



| Contents                | Product Number | Weight each | Order Code     |
|-------------------------|----------------|-------------|----------------|
| Adjustable Wrench 205mm | 501-108        |             | <b>KEN-558</b> |
| Groove Joint 190mm      | 558-367        | 840g        | <b>-9810K</b>  |
| Combination 180mm       | 558-346        |             |                |

**Heavy Duty**


| Contents               | Product Number | Weight each | Order Code     |
|------------------------|----------------|-------------|----------------|
| Long Nose 205mm        | 558-323        |             | <b>KEN-558</b> |
| Diagonal Cutters 180mm | 558-333        | 830g        | <b>-9850K</b>  |
| Linesman Combi 205mm   | 558-358        |             |                |



| Contents               | Product Number | Weight each | Order Code     |
|------------------------|----------------|-------------|----------------|
| Groove Joint 255mm     | 558-368        |             | <b>KEN-558</b> |
| Diagonal Cutters 180mm | 558-433        | 1000g       | <b>-9840K</b>  |
| Combination 160mm      | 558-454        |             |                |

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**



**KENNEDY  
PROFESSIONAL**

Manufactured from specially selected steels. The dual material grip handle design allows the user to apply the greatest force with the minimum amount of effort. Manufactured with a polypropylene core for strength and durability with a soft thermoplastic outer for non-slip comfort grip. Especially suitable for production line environments where repetitive work is undertaken. Double polished head and joint. Induction hardened cutting edges with serrated jaws for gripping nuts.

**Pro-Torq Long Nose Pliers with Side Cutter**

| Overall Length                           | Weight each | Order Code    |
|--|-------------|---------------|
| 160mm (6 <sup>3</sup> / <sub>8</sub> "") | 165g        | <b>-4820K</b> |
| 200mm (8"")                              | 190g        | <b>-4840K</b> |

**Pro-Torq Insulated Long Nose Pliers****VDC/IEC 900  
DIN EN 60900**

| Overall Length | Weight each | Order Code    |
|----------------|-------------|---------------|
| 205mm (8"")    | 212g        | <b>-5060K</b> |

**Pro-Torq Flat Nose Pliers**


| Overall Length                           | Weight each | Order Code    |
|--|-------------|---------------|
| 160mm (6 <sup>3</sup> / <sub>8</sub> "") | 167g        | <b>-4920K</b> |

**Pro-Torq Insulated Plier Set**

Double polished head and joint with induction hardened cutting edges. **VDC/IEC 900 DIN EN 60900.**

**Contents:**

nippers 145mm (5<sup>3</sup>/<sub>4</sub>""),  
long nose 160mm (6<sup>3</sup>/<sub>8</sub>""),  
combination 160mm (6<sup>3</sup>/<sub>8</sub>"").

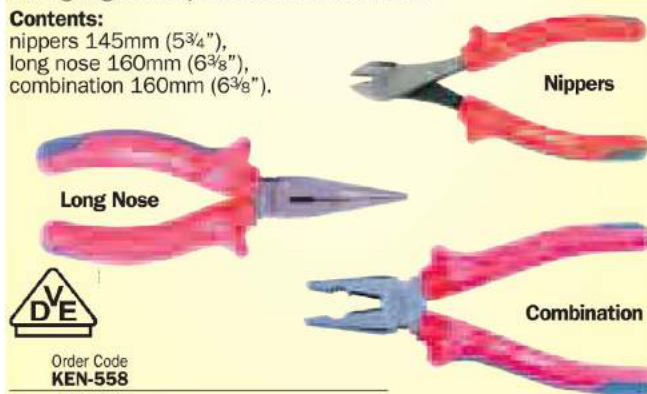**3  
PIECES**

Order Code  
**KEN-558**  
**-6980K**

**KENNEDY  
QUALITY INDUSTRIAL TOOLING****Bent Nose Pliers  
with Cutter**

Chrome vanadium steel, bonded vinyl coated handle. Double polished head and joint with induction hardened cutting edges. Serrated jaws with side cutter.



| Overall Length                           | Weight each | Order Code    |
|--|-------------|---------------|
| 160mm (6 <sup>3</sup> / <sub>8</sub> "") | 166g        | <b>-3250K</b> |
| 200mm (8"")                              | 234g        | <b>-3260K</b> |

**Long Jaw Round Nose Pliers**

Bonded vinyl-coated handle. Double polished head and joint. Induction hardened cutting edges. The round nose jaws allow the forming of loops in wire or thin strips of material.



| Overall Length                           | Weight each | Order Code    |
|--|-------------|---------------|
| 160mm (6 <sup>3</sup> / <sub>8</sub> "") | 142g        | <b>-3120K</b> |

**Flat Nose Pliers**

Ideal for general gripping especially thin materials. Bonded vinyl coated handle. Double polished head and joint. Induction hardened cutting edges.



\* Serrated jaws

| Overall Length                             | Weight each | Order Code    |
|--|-------------|---------------|
| 140mm (5 <sup>1</sup> / <sub>2</sub> "")   | 108g        | <b>-3020K</b> |
| * 160mm (6 <sup>3</sup> / <sub>8</sub> "") | 183g        | <b>-3050K</b> |

**Electrician's Flat Nose Pliers  
with Notched Wire Cutter**

Bonded vinyl-coated handle. Double polished head and joint. Induction hardened cutting edges. Serrated jaws.



| Overall Length                           | Weight each | Order Code    |
|--|-------------|---------------|
| 160mm (6 <sup>3</sup> / <sub>8</sub> "") | 166g        | <b>-3140K</b> |

**Pointed Nose Assembly Pliers**

Bonded vinyl-coated handle. Double polished head and joint with induction hardened cutting edges.



| Overall Length | Weight each | Order Code    |
|----------------|-------------|---------------|
| 125mm (5"")    | 91g         | <b>-3150K</b> |

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**

© 2018



### Soft Touch Engineer's Pliers - Slip Joint



Hardened steel body with replaceable soft nylon jaws and bonded vinyl-coated handle. For use on delicate or finished components which normal steel jaw pliers would mark or damage. Dual position joint allows use across a wide range of diameters. With serrated parallel jaws for gripping flat workpieces and curved jaw for gripping nuts, pipes etc.

| Overall Length       | Jaw Opening | Weight each | Order Code    |
|----------------------|-------------|-------------|---------------|
| 165mm (6½")          | 50mm        | 180g        | <b>-8960K</b> |
| Pair of Jaws to suit |             | 10g         | <b>-8970K</b> |

### Engineer's Pliers - Slip Joint



Chrome vanadium with a chrome finish and textured grip dipped handles. With serrated parallel jaws for gripping flat workpieces and curved jaw for gripping nuts, pipes etc. Dual position joint allows use across a wide range of diameters.

| Overall Length | Weight each | Order Code    |
|----------------|-------------|---------------|
| 150mm (6")     | 190g        | <b>-4630K</b> |
| 200mm (8")     | 250g        | <b>-4640K</b> |
| 255mm (10")    | 405g        | <b>-4650K</b> |

### Heavy Duty Lineman's Pliers

Heavy duty standard manufactured from chrome vanadium steel with a satin finish. Serrated jaws for gripping nuts, bolts, studs etc. Side cutting for wire up to 1.6mm diameter. Also with serrated gripping and crimping jaws behind the head.

| Overall Length | Weight each | Order Code    |
|----------------|-------------|---------------|
| 160mm (6¾")    | 190g        | <b>-4560K</b> |
| 185mm (7½")    | 260g        | <b>-4570K</b> |
| 210mm (8¾")    | 330g        | <b>-4580K</b> |

### Heavy Duty Long Nose Pliers with Cutter

Heavy duty standard manufactured from chrome vanadium with satin finish. Built-in serrated section behind head for gripping. Hard wearing with PVC safety handles and side cutter.

| Overall Length | Weight each | Order Code    |
|----------------|-------------|---------------|
| 125mm (5")     | 115g        | <b>-4200K</b> |
| 150mm (6")     | 160g        | <b>-4210K</b> |
| 200mm (8")     | 215g        | <b>-4230K</b> |

## PLIERS & GRIPS

**GROUP 558**

Manufactured from specially selected steels. The dual material grip handle design allows the user to apply the greatest force with the minimum amount of effort. Manufactured with a polypropylene core for strength and durability with a soft thermoplastic outer for non-slip comfort grip.



### Pro-Torq Combination Pliers with Side Cutters

Especially suitable for production line environments where repetitive work is undertaken. Double polished head and joint. Induction hardened cutting edges with serrated jaws for gripping nuts

| Overall Length | Weight each | Order Code    |
|----------------|-------------|---------------|
| 165mm (6½")    | 210g        | <b>-6820K</b> |
| 180mm (7")     | 293g        | <b>-4800K</b> |
| 200mm (8")     | 370g        | <b>-6840K</b> |

### Pro-Torq Insulated Combination Pliers

Especially suitable for production line environments where repetitive work is undertaken. Double polished head and joint. for gripping nuts.

| Overall Length | Weight each | Order Code    |
|----------------|-------------|---------------|
| 160mm (6¾")    | 226g        | <b>-5140K</b> |
| 180mm (7")     | 290g        | <b>-5160K</b> |
| 205mm (8")     | 344g        | <b>-5180K</b> |

### Long Nose Pliers with Cutter



Chrome vanadium steel, with bonded vinyl coated handle. Double polished head and joint with induction hardened cutting edges. Also with side cutter and serrated gripping and crimping jaws behind the head.

| Overall Length | Weight each | Order Code    |
|----------------|-------------|---------------|
| 140mm (5½")    | 118g        | <b>-3200K</b> |
| 160mm (6¾")    | 147g        | <b>-3210K</b> |
| 200mm (8")     | 218g        | <b>-3230K</b> |

### Long Nose Pliers



Industrial quality chrome vanadium steel, chemically blacked. Ideal for terminal louse forming, wire manipulation and shape forming in confined spaces. Round jaw finish with smooth action single joints and hardened cutting edges. Laser etched markings. Bi-material grips.

| Overall Length | Weight each | Order Code    |
|----------------|-------------|---------------|
| 135mm (5¼")    | 110g        | <b>-4180K</b> |
| 170mm (6¾")    | 110g        | <b>-4200K</b> |
| 190mm (7½")    | 120g        | <b>-4210K</b> |
| 200mm (8")     | 180g        | <b>-4230K</b> |

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**



**KENNEDY**  
 QUALITY INDUSTRIAL TOOLING

**Universal Type Heavy Duty Combination Pliers**


Universal type heavy duty combination pliers with single cutter. Chrome vanadium steel with heavy duty insulated handle with slip guard. Double polished head and joint. Serrated parallel jaws for gripping flat workpieces and a serrated curved jaw for gripping nuts, etc. Also with side cutter with induction hardened cutting edges.


**Crimping Jaws**

| Overall Length                           | Weight each | Order Code    |
|--|-------------|---------------|
| 160mm (6 <sup>3</sup> / <sub>8</sub> " ) | 200g        | <b>-4520K</b> |
| 180mm (7" )                              | 275g        | <b>-4530K</b> |
| 205mm (8" )                              | 370g        | <b>-4540K</b> |

**Universal Type Combination Pliers with Single Cutter**

Chrome vanadium steel, bonded vinyl-coated handle. Double polished head and joint. Induction hardened cutting edges. Also with side cutter and serrated gripping and crimping jaws behind the head.


**Crimping Jaws**

| Overall Length                           | Weight each | Order Code    |
|--|-------------|---------------|
| 115mm (4 <sup>1</sup> / <sub>2</sub> " ) | 100g        | <b>-3500K</b> |
| 150mm (6" )                              | 217g        | <b>-3520K</b> |
| 180mm (7" )                              | 250g        | <b>-3530K</b> |
| 205mm (8" )                              | 367g        | <b>-3540K</b> |

**Universal Type Combination Pliers with Joint Cutter**

Chrome vanadium steel, bonded vinyl coated handle. Double polished head and joint. Induction hardened cutting edges. Also with side cutter, serrated gripping and crimping jaws behind the head and joint cutter for heavy duty wire cutting.


**Joint Cutter**
**Crimping Jaws**

| Overall Length | Weight each | Order Code    |
|----------------|-------------|---------------|
| 180mm (7" )    | 350g        | <b>-3460K</b> |

**KENNEDY**  
**PROFESSIONAL**

Manufactured from specially selected steels. The dual material grip handle design allows the user to apply the



greatest force with the minimum amount of effort. Manufactured with a polypropylene core for strength and durability with a soft thermoplastic outer for non-slip comfort grip. Especially suitable for production line environments where repetitive work is undertaken. Double polished head and joint. Induction hardened cutting edges with serrated jaws for gripping nuts.

**Pro-Torq Long Nose Pliers with Side Cutter**

**DUAL MATERIAL HANDLES**

| Overall Length                           | Weight each | Order Code    |
|--|-------------|---------------|
| 165mm (6 <sup>1</sup> / <sub>2</sub> " ) | 140g        | <b>-6860K</b> |
| 215mm (8 <sup>1</sup> / <sub>2</sub> " ) | 210g        | <b>-6880K</b> |

**Pro-Torq Insulated Long Nose Pliers**
**VDC / IEC 900**  
**DIN EN 60900**

**DUAL MATERIAL HANDLES**

**1000VAC**

| Overall Length                           | Weight each | Order Code    |
|--|-------------|---------------|
| 160mm (6 <sup>3</sup> / <sub>8</sub> " ) | 157g        | <b>-5020K</b> |
| 205mm (8" )                              | 221g        | <b>-5040K</b> |

**YAMOTO**  
 INDUSTRIAL PLIERS

**Combination Pliers**


Industrial quality chrome vanadium steel, chemically blacked. Particularly useful for engineers' and electricians'. Serrated jaws for gripping nuts, bolts, studs etc.



| Overall Length | Weight each | Order Code    |
|----------------|-------------|---------------|
| 160mm (6" )    | 180g        | <b>-4560K</b> |
| 185mm (7" )    | 310g        | <b>-4570K</b> |
| 210mm (8" )    | 400g        | <b>-4580K</b> |



**KENNEDY**  
**PROFESSIONAL**
**Pro-Torq  
Comfort Grip Pliers**


Manufactured from specially selected steels. The dual material grip handle design allows the user to apply the greatest force with the minimum amount of effort. Manufactured with a polypropylene core for strength and durability with a soft thermoplastic outer for non-slip comfort grip. Especially suitable for production line environments where repetitive work is undertaken.



| No. of Pieces | Contents  | Weight each | Order Code KEN-558 |
|---------------|---|-------------|--------------------|
| 3             | Long Nose 165mm<br>Diagonal Nippers 140mm<br>Combination Pliers 165mm | 0.65kg      | -7000K             |



| No. of Pieces | Contents  | Weight each | Order Code KEN-558 |
|---------------|---|-------------|--------------------|
| 4             | Groove Joint 265mm<br>Long Nose 215mm<br>Diagonal Nippers 165mm<br>Combination Pliers 200mm | 1.45kg      | -7020K             |

**KENNEDY**  
**QUALITY INDUSTRIAL TOOLING**
**Heavy Duty Long Nose  
Pliers with Cutter**


Chrome vanadium steel, heavy duty handle with slip guard. Double polished head and joint with induction hardened cutting edges. Also with side cutter and serrated gripping and crimping jaws behind the head.




| Overall Length | Weight each | Order Code KEN-558 |
|----------------|-------------|--------------------|
| 140mm (5½")    | 125g        | -4200K             |
| 160mm (6¾")    | 150g        | -4210K             |
| 200mm (8")     | 200g        | -4230K             |

**KENNEDY**  
**PROFESSIONAL**
**Professional Glow Plug  
Connector Pliers**


Suitable for the removal of hard to reach glow plug connectors found on the latest generation of engines. Made from chrome vanadium steel. Composite handle provides added comfort and control.

**Blade length:** 125mm.

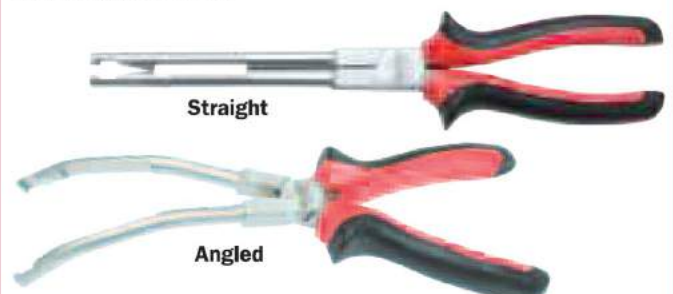


| Jaw Type | Order Code KEN-503 |
|----------|--------------------|
| Straight | -1240K             |
| Angled   | -1260K             |

**SENATOR**  
**QUALITY TOOLING**
**Heavy Duty  
Plier Set**

Manufactured from chrome vanadium steel with a satin finish.

**Overall length:** 150mm (6")

**Contents:**  
long nose pliers with cutter, diagonal cutting nippers, linesman's pliers.

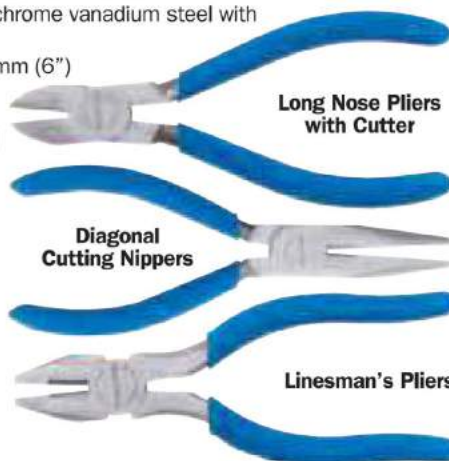
**3  
PIECES**

Order Code  
**SEN-558**  
-9830K

**YAMOTO**
**Chrome Vanadium  
Plier & Wrench Sets**


Manufactured from industrial quality chrome vanadium steel, chemically blacked with laser etched markings and bi-material grips.

**3-Piece Plier & Wrench Set**



| No. of Pieces | Contents  | Order Code YMT-558 |
|---------------|---|--------------------|
| 3             | Waterpump Plier 250mm<br>Combination Plier 185mm<br>Adjustable Wrench 150mm | -9810K             |

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**



**KENNEDY PROFESSIONAL**

Manufactured from specially selected steels. The dual material grip handle design allows the user to apply the

greatest force with the minimum amount of effort. Manufactured with a polypropylene core for strength and durability with a soft thermoplastic outer for non-slip comfort grip. Especially suitable for production line environments where repetitive work is undertaken. Double polished head and joint. Induction hardened cutting edges.

**Pro-Torq Diagonal Cutting Nippers****DUAL MATERIAL HANDLES**

| Overall Length | Weight each | Order Code    |
|----------------|-------------|---------------|
| 125mm (5")     | 170g        | <b>-6900K</b> |
| 165mm (6½")    | 210g        | <b>-6920K</b> |

**Pro-Torq Insulated Diagonal Cutting Nippers**

VDC/IEC 900  
DIN EN 60900

**DUAL MATERIAL HANDLES**

1000VAC

| Overall Length | Weight each | Order Code    |
|----------------|-------------|---------------|
| 145mm (5¾")    | 215g        | <b>-5080K</b> |
| 160mm (6⅜")    | 205g        | <b>-5100K</b> |
| 205mm (8")     | 262g        | <b>-5120K</b> |

**KENNEDY QUALITY INDUSTRIAL TOOLS****Standard Diagonal Cutting Nippers**

Double polished head and joint. Induction hardened cutting edges. Designed to give added strength at the point yet still fit into confined spaces. The cutting edge is offset at a slight angle to the handles to allow close cuts to a flat surface.



| Overall Length | Weight Per 6 | Order Code    |
|----------------|--------------|---------------|
| 130mm (5¼")    | 0.75kg       | <b>-3300K</b> |
| 160mm (6⅜")    | 1.10kg       | <b>-3320K</b> |
| 180mm (7")     | 1.30kg       | <b>-3330K</b> |

**YAMOTO INDUSTRIAL PLIERS****Diagonal Cutting Nippers**

Industrial quality chrome vanadium steel, chemically blacked. Designed to give added strength at the point and allow hard wire to be cut without damaging the edge thus giving prolonged life. Bi-material grips.

**DUAL MATERIAL HANDLES**

| Overall Length | Weight each | Order Code    |
|----------------|-------------|---------------|
| 130mm (5¼")    | 110g        | <b>-4300K</b> |
| 160mm (6¼")    | 170g        | <b>-4320K</b> |
| 185mm (7¼")    | 230g        | <b>-4340K</b> |

**KENNEDY PROFESSIONAL****Pro-Torq End Cutting Nippers**

Manufactured from specially selected steels. The dual material grip handle design allows the user to apply the greatest force with the minimum amount of effort. Manufactured with a polypropylene core for strength and durability with a soft thermoplastic outer for non-slip comfort grip. Double polished head and joint. Induction hardened cutting edges. Used for twisting and cutting wire in the construction industry.



| Overall Length | Weight each | Order Code    |
|----------------|-------------|---------------|
| 160mm (6⅜")    | 261g        | <b>-4860K</b> |
| 200mm (8")     | 408g        | <b>-4880K</b> |

**End Cutting Nippers**

Bonded vinyl-coated handle, double polished head and joint with induction hardened cutting edges. The robust Construction makes these ideal for twisting and cutting wire in the construction industry.



| Overall Length | Weight each | Order Code    |
|----------------|-------------|---------------|
| 160mm (6⅜")    | 1.30kg      | <b>-3620K</b> |

**High Tensile Diagonal Cutting Pliers**

Chrome vanadium steel, with bonded vinyl-coated handle. Double polished head and joint. Induction hardened cutting edges.



| Overall Length | Weight each | Order Code    |
|----------------|-------------|---------------|
| 160mm (6⅜")    | 216g        | <b>-3410K</b> |
| 180mm (7")     | 283g        | <b>-3430K</b> |

**Heavy Duty Diagonal Cutting Nippers**

Heavy duty handle with slip guard. Double polished head and joint. Induction hardened cutting edges.



| Overall Length | Weight each | Order Code    |
|----------------|-------------|---------------|
| 140mm (5½")    | 0.83g       | <b>-4300K</b> |
| 160mm (6⅜")    | 1.20g       | <b>-4320K</b> |
| 180mm (7")     | 1.30g       | <b>-4330K</b> |



### High Tensile Diagonal Cutting Nippers

Chrome vanadium with textured dipped PVC handles for use on hard wire. Hardened cutting edges.



| Overall Length | Weight each | Order Code     |
|----------------|-------------|----------------|
| 175mm (7")     | 180g        | <b>SEN-558</b> |

### Heavy Duty Diagonal Cutting Nippers

Chrome vanadium steel with a satin finish. Also have a serrated section behind the head for gripping. Hard wearing heavy-duty PVC safety handles.



Also with serrated gripping and crimping jaws behind the head.

| Overall Length | Weight each | Order Code     |
|----------------|-------------|----------------|
| 125mm (5")     | 170g        | <b>SEN-558</b> |
| 150mm (6")     | 205g        | <b>-4300K</b>  |
| 200mm (8")     | 270g        | <b>-4320K</b>  |

### 7" Wire Rope Cutters

Contoured steel handles with vinyl grip for improved comfort and control. Heavy duty blades manufactured from tempered and hardened high carbon steel with polished finish. Spring-loaded cutting action for easy one-handed operation with safety lock to keep jaws closed when not in use.

**Wire rope capacity:** 4.8mm,  
**Spring wire:** 1.5mm.



| Overall Length | Weight each | Order Code     |
|----------------|-------------|----------------|
| 150mm (6")     | 350g        | <b>KEN-558</b> |



### Heavy Duty Cable Cutters

For use when cutting aluminium and copper cable, using a slicing action. Manufactured from forged steel with PVC dipped handles.



| Cutting Capacity  | Overall Length | Order Code     |
|-------------------|----------------|----------------|
| 60mm <sup>2</sup> | 255mm(10")     | <b>KEN-558</b> |

### Light Duty Cable Cutters

For cutting copper cable, plastic pipe, wooden dowels, rope cord and similar materials up to 10mm diameter. Precision ground and hardened stainless steel blades - 50~54HRC.

Lightweight polypropylene handles with spring loaded action, easy reach thumb catch convenient for right and left hand users.



| Cutting Capacity | Overall Length | Weight each | Order Code     |
|------------------|----------------|-------------|----------------|
| 10mm             | 165mm (6½")    | 130g        | <b>KEN-558</b> |

### Ratcheting Cable Cutter

Manufactured from high tensile steel. For cutting copper, aluminium and multiple strand cable. Fully hardened cutting edges produce burr-free cuts. Compound lever action for maximum efficiency and moulded cushion grips for user comfort.



| Cutting Capacity | Weight each | Order Code     |
|------------------|-------------|----------------|
| 32mm             | 675g        | <b>KEN-558</b> |
| Spare blades     | 75g         | <b>-8200K</b>  |

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**





These cable cutters have heat treated cutting edges and are designed to cut copper/aluminium cables with minimal distortion. The soft grip handles are designed for user comfort whilst exerting force.

| Cutting Capacity | Overall Length | Weight each | Order Code     |
|------------------|----------------|-------------|----------------|
| 32mm             | 335mm (13")    | 995g        | <b>KEN-558</b> |
| 38mm             | 335mm (13")    | 995g        | <b>-9500K</b>  |
|                  |                |             | <b>-9510K</b>  |

### Standard Duty Wire Strippers

Bonded vinyl coated handle, double polished head and joint with induction hardened cutting edges. Brass adjusting screw.




Jaws can be reset for perfect stripping every time.

| Overall Length | Weight each | Order Code     |
|----------------|-------------|----------------|
| 155mm (6")     | 166g        | <b>KEN-558</b> |
|                |             | <b>-3590K</b>  |

### Lever Type Cable Cutter

These cable cutters have heat-treated cutting edges and are designed to cut copper/aluminium cables with minimal distortion. The soft grip handles are designed for user comfort whilst exerting force.

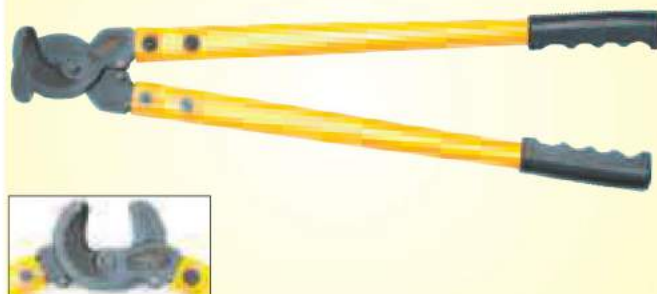

| Cutting Capacity | Overall Length | Weight each | Order Code     |
|------------------|----------------|-------------|----------------|
| 18mm             | 380mm          | 3.4kg       | <b>KEN-558</b> |
| 25mm             | 550mm          | 3.4kg       | <b>-9400K</b>  |
| 40mm             | 820mm          | 3.4kg       | <b>-9410K</b>  |
|                  |                |             | <b>-9420K</b>  |

Manufactured from specially selected steels. The dual material grip handle design allows the user to apply the greatest force with the minimum amount of effort. Manufactured with a polypropylene core for strength and durability with a soft thermoplastic outer for non-slip comfort grip.



### Pro-Torq Wire Strippers

Double polished head and joint. Serrated parallel jaws and a serrated curved jaw. Also with side cutter with induction hardened cutting edges. Especially suitable for production line environments where repetitive work is undertaken.



**DUAL  
MATERIAL  
HANDLES**

| Overall Length | Weight each | Order Code     |
|----------------|-------------|----------------|
| 170mm (7")     | 223g        | <b>KEN-558</b> |
|                |             | <b>-4900K</b>  |

### Pro-Torq Insulated End Wire Strippers

Especially suitable for production line environments where repetitive work is undertaken. Double polished head and joint with induction hardened cutting edges.

VDC/IEC 900  
DIN EN 60900



**DUAL  
MATERIAL  
HANDLES**




1000VAC

| Overall Length | Weight each | Order Code     |
|----------------|-------------|----------------|
| 160mm (6 3/8") | 199g        | <b>KEN-558</b> |
|                |             | <b>-5200K</b>  |



Multi-purpose tool with alloy steel jaws suitable for stripping, cutting and crimping all types of wire. Automatic wire stripper.

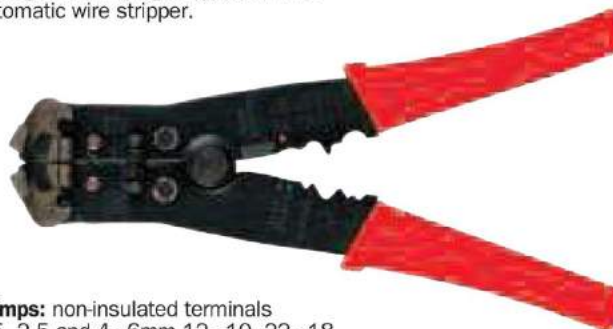

**Crimps:** non-insulated terminals 1.5, 2.5 and 4 - 6mm 12 - 10, 22 - 18 and 16 - 14 AWG).

**Crimps:** insulated terminals 1.5, 2.5 and 6mm (10 - 22 AWG).  
**Capacity:** 0.13 - 6.0mm<sup>2</sup>.

| Overall Length | Weight each | Order Code     |
|----------------|-------------|----------------|
| 200mm (8")     | 270g        | <b>KEN-558</b> |
|                |             | <b>-3600K</b>  |



### Pro-Torq Groove Waterpump Pliers

Double polished head and joint with hardened steel jaws. The dual material grip handle manufactured with a polypropylene core for strength and durability with a soft thermoplastic outer for non-slip comfort grip. Ideal for environments where repetitive work is undertaken. Joint protector stops the handles closing together, preventing trapped fingers.


**DUAL  
MATERIAL  
HANDLES**

| Overall Length | Jaw Opening | Weight each | Order Code     |
|----------------|-------------|-------------|----------------|
| 265mm (10½")   | 45mm        | 420g        | <b>KEN-558</b> |

### Box Joint Waterpump Pliers

The slip joint head design prevent the pliers from twisting when pressure is applied. Hardened steel, ground jaws, sliding pivot joint for a wide range of jaw openings. Satin finish. The joint protector stops the handles closing together, preventing trapped fingers. Bonded anti slip vinyl grips



| Overall Length | Jaw Opening | Weight each | Order Code     |
|----------------|-------------|-------------|----------------|
| 255mm (10")    | 35mm        | 283g        | <b>KEN-558</b> |

### Plastic Pipe Gripping Pliers

Ideal for screwing and unscrewing plastic pipe joints, round union nuts etc. up to 65mm diameter 4-position adjustable slip joint. Serrated gripping jaws with removable plastic jaw covers. Manufactured from chrome vanadium electric steel, oil-hardened and tempered with bonded vinyl grip for improved comfort and control.



| Overall Length | Weight each | Order Code     |
|----------------|-------------|----------------|
| 233mm (9")     | 295g        | <b>KEN-558</b> |

### Slip Joint Waterpump Pliers

Industrial quality chrome vanadium steel, chemically blacked. With a sliding pivot to give a wide range of jaw openings. Bi-material grips.


**DUAL  
MATERIAL  
HANDLES**


| Overall Length | Weight each | Order Code     |
|----------------|-------------|----------------|
| 250mm (10")    | 380g        | <b>YMT-558</b> |

## PLIERS & GRIPS

**GROUP  
558**

### Groove Joint Waterpump Pliers


Hardened chromed steel jaws. Sliding pivot joint allows the widest range of jaw openings. The handles cannot be closed together, preventing trapped fingers.



| Overall Length | Jaw Opening | Weight each | Order Code     |
|----------------|-------------|-------------|----------------|
| 190mm (7½")    | 30mm        | 280g        | <b>KEN-558</b> |
| 255mm (10")    | 45mm        | 400g        | <b>-3670K</b>  |
| 320mm (12½")   | 55mm        | 425g        | <b>-3680K</b>  |
| 405mm (16")    | 100mm       | 580g        | <b>-3700K</b>  |

### Groove Joint Waterpump Pliers

Manufactured from chrome vanadium steel with a satin finish. Textured grip handles for improved comfort and control. Groove joint for quick adjustment with serrated jaws for extra grip.

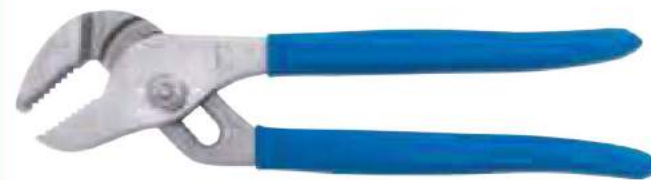

| Overall Length | Weight each | Order Code     |
|----------------|-------------|----------------|
| 200mm (8")     | 275g        | <b>SEN-558</b> |
| 255mm (10")    | 385g        | <b>-4670K</b>  |
| 305mm (12")    | 415g        | <b>-4680K</b>  |
| 420mm (16½")   | 570g        | <b>-4700K</b>  |

### Box Joint Waterpump Pliers

Chrome vanadium steel with bonded vinyl-coated handles. Overall length: 255mm (10").



| Overall Length | Weight each | Order Code     |
|----------------|-------------|----------------|
| 255mm (10")    | 400g        | <b>SEN-558</b> |

### Spring-Loaded Soft Touch Slip Joint Water Pump Pliers

Hardened and tempered chrome vanadium steel with corrosion-resistant chemically blacked finish. Eight position groove with spring-loaded rapid jaw adjustment.



Jaw Opening: 40mm.



| Overall Length          | Weight each | Order Code     |
|-------------------------|-------------|----------------|
| 250mm (10")             | 400g        | <b>KEN-558</b> |
| Soft Jaws To Suit Above | 5g          | <b>-8920K</b>  |

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**



**KENNEDY** European Pattern  
Circclip Pliers

Industrial quality chrome vanadium hardened and tempered. PVC cushion grip handles. Coil sprung to aid operation.

**External - Straight Jaw**

| Circlip Capacity | Overall Length | Weight each | Order Code<br>KEN-558 |
|------------------|----------------|-------------|-----------------------|
| 10 - 25mm        | 125mm ( 5")    | 65g         | <b>-6520K</b>         |
| 19 - 40mm        | 175mm ( 7")    | 135g        | <b>-6570K</b>         |
| 32 - 60mm        | 250mm (10")    | 265g        | <b>-6620K</b>         |

**External - 90° Angled Jaw**

| Circlip Capacity | Overall Length | Weight each | Order Code<br>KEN-558 |
|------------------|----------------|-------------|-----------------------|
| 10 - 25mm        | 125mm ( 5")    | 65g         | <b>-6530K</b>         |
| 19 - 40mm        | 175mm ( 7")    | 140g        | <b>-6580K</b>         |
| 32 - 80mm        | 250mm (10")    | 260g        | <b>-6630K</b>         |

**Internal - Straight Jaw**

| Circlip Capacity | Overall Length | Weight each | Order Code<br>KEN-558 |
|------------------|----------------|-------------|-----------------------|
| 10 - 25mm        | 125mm ( 5")    | 65g         | <b>-6500K</b>         |
| 19 - 65mm        | 175mm ( 7")    | 130g        | <b>-6550K</b>         |
| 32 - 60mm        | 250mm (10")    | 250g        | <b>-6600K</b>         |


**Internal - 90° Angled Jaw**

| Circlip Capacity | Overall Length | Weight each | Order Code<br>KEN-558 |
|------------------|----------------|-------------|-----------------------|
| 10 - 25mm        | 125mm ( 5")    | 65g         | <b>-6510K</b>         |
| 19 - 65mm        | 175mm ( 7")    | 140g        | <b>-6560K</b>         |
| 32 - 80mm        | 250mm (10")    | 260g        | <b>-6610K</b>         |

**Circlip Pliers****Long Handled**

Industrial quality chrome vanadium hardened and tempered. PVC cushion grip handles. Coil sprung to aid operation.

**Overall length:** 300mm (12").

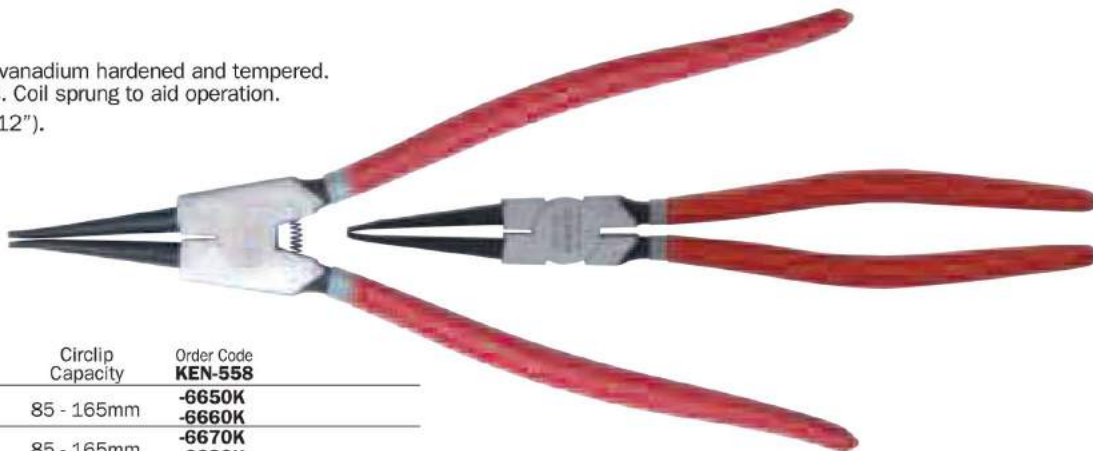

| Type     | Jaw        | Circlip Capacity | Order Code<br>KEN-558 |
|----------|------------|------------------|-----------------------|
| Internal | Straight   | 85 - 165mm       | <b>-6650K</b>         |
|          | 90° angled |                  | <b>-6660K</b>         |
| External | Straight   | 85 - 165mm       | <b>-6670K</b>         |
|          | 90° angled |                  | <b>-6680K</b>         |

**Heavy Duty Snap Ring Pliers****Ratcheting**

Heat-treated steel circlip pliers for large equipment repair. Replaceable tips and spring ratchet locking mechanism to securely hold against snap ring tension. Black powder coated. Galvanised tips and lock lever. Insulated lever handle.

**Overall length:**  
510mm (20").



| Type     | Jaw        | Circlip Capacity | Order Code<br>KEN-558 |
|----------|------------|------------------|-----------------------|
| Internal | Straight   | 165 - 300mm      | <b>-6700K</b>         |
|          | 90° angled |                  | <b>-6710K</b>         |
| External | Straight   | 165 - 300mm      | <b>-6720K</b>         |
|          | 90° angled |                  | <b>-6730K</b>         |


| Spare Jaws | To suit     | Order Code<br>KEN-567 |
|------------|-------------|-----------------------|
| Straight   | 165 - 300mm | <b>-3820K</b>         |
| Angled     |             | <b>-3840K</b>         |



## Pro-Torq Sprung Circlip Pliers

Manufactured from specially selected steels. The dual material grip handle design allows the user to apply the greatest force with the minimum amount of effort. These are manufactured with a polypropylene core for strength and durability with a soft thermoplastic outer for non-slip comfort grip. Double polished head and joint. Induction hardened cutting edges. Especially suitable for production line environments where repetitive work is undertaken.

### Sprung Straight Jaw Circlip Pliers - Internal

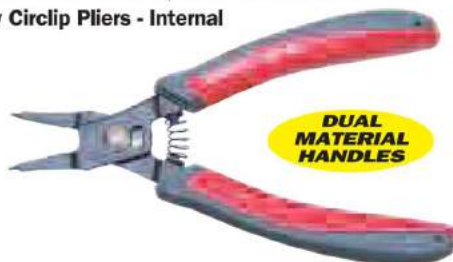

**DUAL  
MATERIAL  
HANDLES**

| Circlip Capacity | Overall Length | Weight each | Order Code KEN-558 |
|------------------|----------------|-------------|--------------------|
| 10 - 25mm        | 150mm (6")     | 100g        | -6050K             |
| 12 - 65mm        | 170mm (7")     | 140g        | -6070K             |

### Sprung Straight Jaw Circlip Pliers - External



**DUAL  
MATERIAL  
HANDLES**

| Circlip Capacity | Overall Length | Weight each | Order Code KEN-558 |
|------------------|----------------|-------------|--------------------|
| 10 - 25mm        | 150mm (6")     | 100g        | -6060K             |
| 19 - 40mm        | 170mm (7")     | 140g        | -6080K             |

### Sprung Internal & External Straight Jaw Circlip Plier Set

Supplied in a plastic moulded carry case.

#### Contents 1 of each:

External straight jaw,  
10 - 25mm and 19 - 40mm.  
Internal straight jaw,  
10 - 25mm and 12 - 65mm.

**4  
PIECES**

**DUAL  
MATERIAL  
HANDLES**



| Weight each | Order Code KEN-558 |
|-------------|--------------------|
| 490g        | -6090K             |

### Interchangeable Head Circlip Plier Set

Circlip plier set - eight tools in one. Converts from internal to external. Straight, 45° and 90° interchangeable heads.

**Overall length:** 165mm (6½").

**Spigot dia:** 2x Straight 1.2 and 1.5mm,

45° 1.5mm, 90° 1.2mm.

**Capacity:** 10 - 50mm (¾" - 2").



**5  
PIECES**

| Weight each | Order Code KEN-558 |
|-------------|--------------------|
| 210g        | -6750K             |

## PLIERS & GRIPS

**GROUP  
558**

## Reversible Circlip Pliers

These straight and bent nose pliers are reversible for both internal and external circlip insertion and removal, made from high grade carbon steel with comfortable vinyl handles.

### Straight Jaw



| Circlip Capacity | Overall Length | Weight each | Order Code KEN-558 |
|------------------|----------------|-------------|--------------------|
| 10 - 18mm        | 150mm (6")     | 110g        | -5870K             |
| 12 - 25mm        | 150mm (6")     | 110g        | -5890K             |
| 18 - 48mm        | 210mm (8½")    | 200g        | -5910K             |

### 45° Angled Jaw



| Circlip Capacity | Overall Length | Weight each | Order Code KEN-558 |
|------------------|----------------|-------------|--------------------|
| 10 - 18mm        | 150mm (6")     | 110g        | -5880K             |
| 12 - 25mm        | 150mm (6")     | 110g        | -5900K             |
| 18 - 48mm        | 210mm (8½")    | 200g        | -5920K             |

### Straight & Bent Nose Reversible Circlip Plier Set

Supplied in moulded carry case.

**6  
PIECES**



#### Contents:

x1 Straight/x1 Bent

**Capacity:** 10 - 18mm

x1 Straight/x1 Bent

**Capacity:** 12 - 25mm

x1 Straight/x1 Bent

**Capacity:** 18 - 48mm

| Weight each | Order Code KEN-558 |
|-------------|--------------------|
| 1.30g       | -5930K             |



### Mini Circlip Pliers Set

Features non-slip PVC grips and spring-loaded jaws.

#### Contents:

Straight Nose, Bent Nose,  
Internal and External Pliers.

**Capacity:** 10 - 30mm

**4  
PIECES**

| Order Code KEN-558 |
|--------------------|
| -6160K             |



**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**




**KENNEDY**  
PROFESSIONAL**Pro-Torq Miniature  
ESD Pliers & Cutters**

Dissipative handles safely discharge any electrostatic energy, reducing possibility of damage to sensitive items. The dual material grip handle design allows the user to apply the greatest force with the minimum amount of effort. These are manufactured with a polypropylene core for strength and durability with a soft thermoplastic outer for non-slip comfort grip.



Electro Static Dissipative

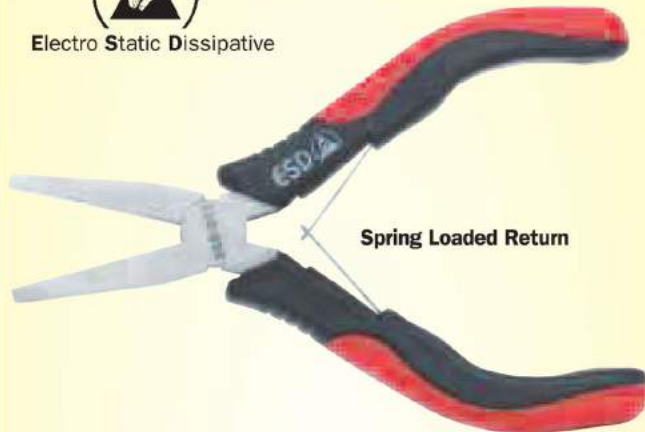

Dual Material Grip




| Side View | End View | Head |
|-----------|----------|------|
|           |          |      |
|           |          |      |
|           |          |      |
|           |          |      |
|           |          |      |
|           |          |      |

| Type                   | Overall Length | Order Code<br>KEN-558 |
|------------------------|----------------|-----------------------|
| Flat Nose              | 130mm (5 1/4") | -9120K                |
| Bent Nose              | 140mm (5 1/2") | -9160K                |
| Long Nose              | 130mm (5 1/4") | -9130K                |
| Needle Nose            | 140mm (5 1/2") | -9150K                |
| Micro Diagonal Cutters | 110mm (4 1/4") | -9060K                |
| Diagonal Cutters       | 115mm (4 1/2") | -9080K                |


**KENNEDY**  
QUALITY INDUSTRIAL TOOLING**Electronics  
Pliers & Cutters**

Made from high quality chrome vanadium with ground finish jaws and bonded vinyl grip for user comfort and control. Used for delicate, fine and accurate work in a continuous production environment. Spring-loaded return for quick repetitive opening and operator comfort.

Overall length: 120mm (4 5/8").

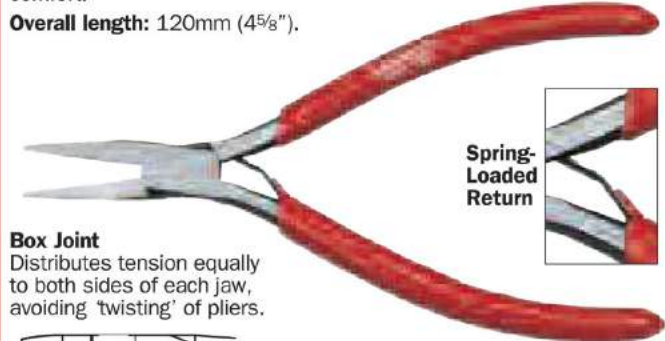**Box Joint**

Distributes tension equally to both sides of each jaw, avoiding 'twisting' of pliers.



| Side View | End View | Head |
|-----------|----------|------|
|           |          |      |

| Type                        | Order Code<br>KEN-558 |
|-----------------------------|-----------------------|
| Pointed Nose - Single Joint | -7330K                |

**Stainless Steel Pliers & Cutters**

Manufactured from heat-treated stainless steel. **Hardness:** pliers 42 - 45HRC; nippers 45 - 48HRC. Used for delicate, fine and accurate work in a continuous production environment. Spring-loaded return for quick repetitive opening and operator comfort.



Cushioned foam safe-grip handles for user comfort and control.



Spring-Loaded Return



| Side View | End View | Head |
|-----------|----------|------|
|           |          |      |
|           |          |      |
|           |          |      |
|           |          |      |

| Type             | Overall Length | Order Code<br>KEN-558 |
|------------------|----------------|-----------------------|
| Long Nose        | 120mm (4 5/8") | -2530K                |
| Bent Nose        | 120mm (4 5/8") | -2520K                |
| Diagonal Cutters | 120mm (4 5/8") | -2540K                |
| End Cutters      | 120mm (4 5/8") | -2550K                |



Made from high quality chrome nickel steel with induction ground cutting edges. Double dipped PVC grips for user comfort and control. Used for delicate, fine and accurate work in a continuous production environment.

Spring loaded return for quick repetitive opening and operator comfort.



**Double-Dipped PVC Grips**

**Spring Loaded Return**  
For quick, repetitive work and operator comfort.

| Side View               | End View | Head |
|-------------------------|----------|------|
| <b>Flat Nose</b>        |          |      |
| <b>Bent Nose</b>        |          |      |
| <b>Long Nose</b>        |          |      |
| <b>Needle Nose</b>      |          |      |
| <b>Diagonal Cutters</b> |          |      |
| <b>End Cutters</b>      |          |      |

| Type             | Overall Length | Order Code KEN-558 |
|------------------|----------------|--------------------|
| Flat Nose        | 130mm (5 1/4") | -7440K             |
| Bent Nose        | 120mm (4 5/8") | -7430K             |
| Needle Nose      | 150mm (6")     | -7450K             |
| Needle Nose      | 110mm (4 1/4") | -7460K             |
| Diagonal Cutters | 110mm (4 1/4") | -7410K             |
| End Cutters      | 110mm (4 1/4") | -7420K             |

#### Set

Supplied in a cushioned zip around case with elasticated tool loops to keep the pliers and cutters secure.

#### Contents 1x:

flat nose - 130mm (5 1/4"),  
bent nose - 120mm (4 5/8"),  
long nose - 130mm (5 1/4"),  
needle nose - 150mm (6"),  
diagonal cutters - 110mm (4 1/4"),  
end cutters - 110mm (4 1/4").

**6  
PIECES**

Order Code  
**KEN-558**  
-7470K



The dual material grip handle design allows the user to apply the greatest force with the minimum amount of effort. These are manufactured with a polypropylene core for strength and durability with a soft thermoplastic outer for non-slip comfort grip.

Made from high quality chrome nickel steel with induction ground cutting edges. Used for delicate, fine and accurate work in a continuous production environment.

**Spring-Loaded Return**  
For quick, repetitive work and operator comfort.

**Dual Material Grip**



| Side View               | End View | Head |
|-------------------------|----------|------|
| <b>Flat Nose</b>        |          |      |
| <b>Bent Nose</b>        |          |      |
| <b>Long Nose</b>        |          |      |
| <b>Needle Nose</b>      |          |      |
| <b>Diagonal Cutters</b> |          |      |
| <b>End Cutters</b>      |          |      |

| Type             | Overall Length | Order Code KEN-558 |
|------------------|----------------|--------------------|
| Flat Nose        | 130mm (5 1/4") | -1210K             |
| Bent Nose        | 120mm (4 5/8") | -1230K             |
| Long Nose        | 130mm (5 1/4") | -1240K             |
| Needle Nose      | 150mm (6")     | -1220K             |
| Diagonal Cutters | 110mm (4 1/4") | -1250K             |
| End Cutters      | 110mm (4 1/4") | -1260K             |

#### Set

Supplied in a cushioned, zip around case with elasticated tool loops to keep the pliers and cutters secure.

#### Contents:

1x flat nose - 130mm (5 1/4"),  
1x bent nose - 120mm (4 5/8"),  
1x long nose - 130mm (5 1/4"),  
1x needle nose - 150mm (6"),  
1x diagonal cutters - 110mm (4 1/4"),  
1x end cutters - 110mm (4 1/4").

Order Code  
**KEN-558**  
-1300K



**6  
PIECES**

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**



**SENATOR**  
 QUALITY TOOLING

**Miniature  
Plier Set**
**5 Piece Set**


Used for precision work on a number of applications. Spring tensioned pliers suited for repetitive use. Fitted with slip-resistant PVC cushion grip handles and heat-treated stainless steel blades.

**Hardness:**

Pliers 42 - 45HRC,  
Nippers 45 - 48HRC.

**Set contents:**

diagonal nippers, flush cutting 90mm (3½");  
bent nose pliers, 45° 100mm (4");  
pointed nose pliers, 100mm (4");  
round nose pliers, 100mm (4");  
flat nose pliers, 100mm (4").

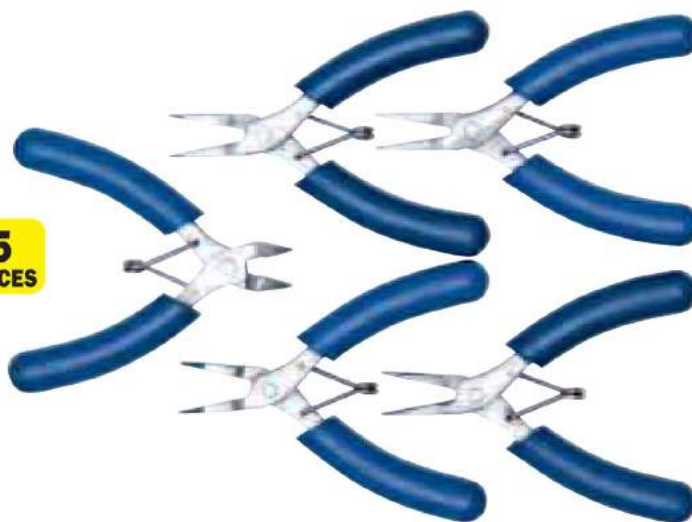**5  
PIECES**

 Weight  
each

265g

 Order Code  
**SEN-558**
**-8010K**
**KENNEDY**  
 QUALITY INDUSTRIAL TOOLING

**O-Clip  
Pincers**

O-clip pincers are designed for rapidly closing O-clips ensuring a positive tamperproof seal. Manufactured from chrome vanadium steel with induction hardened, ground and polished jaws. Bonded vinyl-coated handle.


 Overall  
Length

200mm (8")

 Order Code  
**KEN-558**
**-1000K**
**Revolving Punch Pliers**
**Heavy Duty**

Suitable for producing 2, 2.5, 3, 3.5, 4 and 4.5mm holes in a wide range of materials including card, PVC, etc. Hardened steel body with durable epoxy coating. The six revolving punches cutting edges are induction hardened. Compound lever action, requires 70% less force. Moulded contour grips with slip guards.


 Overall  
Length


270mm (10½")

 Weight  
each

430g

 Order Code  
**KEN-558**
**-3800K**
**Revolving Punch Pliers**
**Standard Duty**

For producing 2, 2.5, 3, 3.5, 4 and 4.5mm holes in a wide range of materials including card, PVC etc. Hardened steel body with durable epoxy coating.

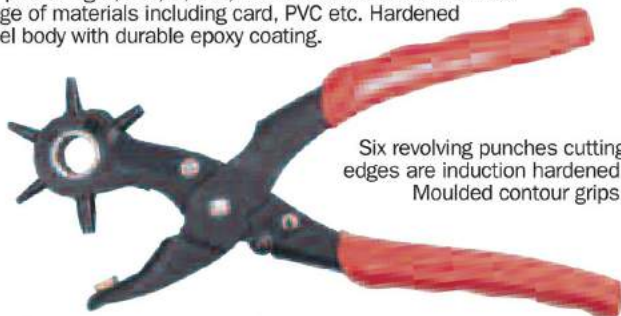

Six revolving punches cutting  
edges are induction hardened.  
Moulded contour grips.

 Overall  
Length

250mm (10")

 Weight  
each

310g

 Order Code  
**KEN-558**
**-3780K**
**Wire Twisting Pliers**

Manufactured from chrome vanadium steel with ground and polished head. Cross knurled jaws with wire cutter. Used for safety-wiring critical fasteners and electrical connectors.


 Overall  
Length

 200mm ( 8")  
255mm (10")

 Weight  
each

 295g  
425g

 Order Code  
**KEN-558**
**-3900K**  
**-3920K**
**Fencing Tool**

Chrome vanadium steel, with heavy duty handle with slip guard. Double polished head and joint. Induction hardened cutting edges. Also with serrated gripping and crimping jaws behind the head.


 Overall  
Length

270mm (10½")

 Weight  
each

716g

 Order Code  
**KEN-558**
**-3720K**
**Carpenter's Pincers**

Ideal for the easy removal of tacks and nails. Bonded vinyl-coated handle, double polished head and joint with induction hardened cutting edges.


 Overall  
Length

 150mm (6")  
180mm (7")  
200mm (8")

 Weight  
Per 6

 2.20kg  
2.00kg  
2.40kg

 Order Code  
**KEN-558**
**-3730K**  
**-3740K**  
**-3760K**



### Straight Jaw Bi-Material Handle Grip Wrenches



Rolled chrome vanadium steel bodies, drop-forged hardened steel jaws with corrosion-resistant bright nickel coating. The dual material handle design allows the user to apply the greatest force.



| Overall Length | Type         | Order Code<br>KEN-558 |
|----------------|--------------|-----------------------|
| 175mm (7")     | Straight Jaw | -7030K                |
| 255mm (10")    | Straight Jaw | -7040K                |

### Straight Jaw Grip Wrenches



Rolled chrome vanadium steel bodies, drop forged hardened steel jaws with corrosion-resistant bright nickel coating. For general-purpose gripping.



| Type/<br>Duty | Overall Length | Max Clamp Pressure     | Order Code<br>KEN-558 |
|---------------|----------------|------------------------|-----------------------|
| Standard      | 125mm (5")     | 660lb <sup>2</sup> in  | -7050K                |
|               | 180mm (7")     | 880lb <sup>2</sup> in  | -7070K                |
|               | 255mm (10")    | 1320lb <sup>2</sup> in | -7100K                |
| Heavy         | 255mm (10")    | 2500lb <sup>2</sup> in | -7130K                |

Set: Details as above.

| Number of Pieces | Contents                 | Order Code<br>KEN-558 |
|------------------|--------------------------|-----------------------|
| 2                | 125mm (5") & 255mm (10") | -7280K                |

#### Long Nose

Specially designed with long slim jaws to enable access to restricted areas. With quick release.



| Overall Length | Weight Per 6 | Order Code<br>KEN-558 |
|----------------|--------------|-----------------------|
| 150mm (6")     | 2.00kg       | -8060K                |
| 230mm (9")     | 3.60kg       | -8070K                |

### Straight & Curved Jaw Grip Wrenches



High strength grip wrench bodies are manufactured from rolled chrome vanadium steel with serrated drop forged hardened steel jaws.

Straight Jaw



Curved Jaw



| Overall Length      | Weight each | Order Code<br>SEN-558 |
|---------------------|-------------|-----------------------|
| <b>Straight Jaw</b> |             |                       |
| 180mm (7")          | 350g        | -7070K                |
| 255mm (10")         | 550g        | -7100K                |
| <b>Curved Jaw</b>   |             |                       |
| 180mm (7")          | 310g        | -7170K                |
| 255mm (10")         | 550g        | -7200K                |

## PLIERS & GRIPS

**GROUP 558**


### Curved Jaw Grip Wrenches

Rolled chrome vanadium steel bodies, drop forged hardened steel jaws with corrosion-resistant bright nickel coating. The jaw opening and clamping pressure can be adjusted with the knurled head screw.



| Type/<br>Duty | Overall Length | Max Clamp Pressure     | Order Code<br>KEN-558 |
|---------------|----------------|------------------------|-----------------------|
| Standard      | 125mm (5")     | 660lb <sup>2</sup> in  | -7150K                |
|               | 180mm (7")     | 880lb <sup>2</sup> in  | -7170K                |
|               | 255mm (10")    | 1320lb <sup>2</sup> in | -7200K                |
| Heavy         | 255mm (10")    | 2500lb <sup>2</sup> in | -7230K                |

Set: Details as above.

| Number of Pieces | Contents                 | Order Code<br>KEN-558 |
|------------------|--------------------------|-----------------------|
| 2                | 125mm (5") & 255mm (10") | -7290K                |

### Multi-Purpose Grip Wrench

The jaw configuration allows straight, curved and convex shapes to be gripped.



| Capacity (mm) | Overall Length | Weight each | Order Code<br>KEN-558 |
|---------------|----------------|-------------|-----------------------|
| 0 - 63        | 235mm (9½")    | 630g        | -8040K                |

### Ideal Grip Wrench

Heavy duty chrome vanadium. With quick release. Two staged curved jaw design for gripping small and large diameters. Particularly suited to gripping rounded off nuts and circular objects.



| Overall Length | Weight each | Order Code<br>KEN-558 |
|----------------|-------------|-----------------------|
| 255mm (10")    | 600g        | -7270K                |

### Parallel Plus Grip Wrench

Heavy duty chrome vanadium. With quick release. Self-adjusting lower jaw swivels into place. Grips squares, hexagons.



| Overall Length | Weight each | Order Code<br>KEN-558 |
|----------------|-------------|-----------------------|
| 255mm (10")    | 340g        | -7250K                |

### Long Jaw Grip Wrenches



High strength.



| Overall Length | Weight each | Order Code<br>SEN-558 |
|----------------|-------------|-----------------------|
| 165mm (6½")    | 433g        | -7260K                |
| 230mm (9")     | 600g        | -7290K                |

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR