

**KENNEDY
PROFESSIONAL**
**Push Through
Steel Handles**

1/4" Chrome - molybdenum with mirror polished finish. Push through square drive, needs only 3% movement to operate ratchet.



Type	Overall Length	Weight each	Order Code
Standard	125mm	120g	KEN-582
Stubby	75mm	70g	-4025K
			-4028K

Disc Type Steel Handle

1/4" Standard wrench with high polished finish. Fitted with spring loaded ball bearing socket retainer. Manufactured from chrome vanadium steel.



Overall Length	Number of Teeth	Weight each	Order Code
140	20	170g	KEN-582
			-4020K

Lever Reversible Rubber Handle

1/4" Chrome vanadium. Rubber grip, 72 tooth ratchet. With thumb lever for reversing without having to remove the socket or accessory. With quick release. A high quality wrench for the professional user.



Overall Length	Number of Teeth	Weight each	Order Code
140mm	72	90g	KEN-582
			-4005K

Lever Reversible Steel Handle

1/4" Fully chromed all steel handle with thumb lever for reversing without having to remove the socket or accessory.



Overall Length	Number of Teeth	Weight each	Order Code
143mm	72	120g	KEN-582
			-4015K

Swivel Handle

1/4" The hinged link allows operation at varied angles to aid access in restricted areas. Knurled grip.



Overall Length	Weight each	Order Code
150mm	125g	KEN-582
		-4180K

**SENATOR
QUALITY TOOLING**
**Lever Reversible
Rubber Handle**

1/4" Chrome vanadium. Rubber grip, 72 tooth ratchet. With thumb lever for reversing. Quick release.



Overall Length	Number of Teeth	Order Code
140mm	72	SEN-582
		-4010K

new
Sliding 'T' Handle

1/4" Manufactured from high quality chrome vanadium with a fully polished finish. The sliding bar will give many options for leverage within a given space.



Overall Length	Weight each	Order Code
105mm	50g	KEN-582
		-4040K

Extension Bars

1/4" Manufactured from high quality chrome vanadium with a fully polished finish. All with knurled 'finger grip'.

Standard


Overall Length	Weight each	Order Code
50mm	25g	KEN-582
100mm	50g	-4060K
150mm	70g	-4080K
250mm	115g	-4100K
		-4120K

Flexible

Steel wire braid allows access into obstructed areas.



Overall Length	Weight each	Order Code
150mm	150g	KEN-582
		-4140K

Wobble

In areas where clearance may be a problem the 'wobble' square drive can be used at an angle of up to 15°.



Overall Length	Weight each	Order Code
50mm	25g	KEN-582
100mm	50g	-4070K
150mm	70g	-4090K
250mm	115g	-4110K
		-4130K

Spinner Handles

1/4" **Fixed Type:** chrome vanadium blade with spring loaded ball bearing socket retainer.

Overall length: 150mm.

Bi-Material

Polypropylene


Handle Type	Weight each	Order Code
Bi-Material	110g	KEN-582
Polypropylene	110g	-4190K
		-4200K

**YAMOTO
INDUSTRIAL SOCKET SETS**
**Lever Reversible
Rubber Handle**

1/4" Chrome vanadium. With thumb lever for reversing. Quick release.

new


Overall Length	Number of Teeth	Order Code
140mm	72	YMT-582
		-4010K

Metric
Manufactured from high grade chrome vanadium which is fully chromed, aluminium free and with a high polish mirror finish. Side-Drive® bi-hexagon sockets are designed to reduce stress and damage to fasteners.

new



Size	Overall Length	Order Code
4.0mm	50mm	-4670K
4.5mm	50mm	-4671K
5.0mm	50mm	-4672K
5.5mm	50mm	-4673K
6.0mm	50mm	-4674K
7.0mm	50mm	-4675K
8.0mm	50mm	-4676K
9.0mm	50mm	-4677K
10.0mm	50mm	-4678K
11.0mm	50mm	-4679K
12.0mm	50mm	-4680K
13.0mm	50mm	-4681K
14.0mm	50mm	-4682K

Sliding T-Handle

1/4" Manufactured from high grade chrome vanadium which is fully chromed, aluminium free and with a high polish mirror finish.

new



Overall Length	Order Code
105mm	-4040K

Spinner Handle

Fixed Type
Chrome vanadium shaft, polypropylene handle with spring loaded bearing socket retainer.

new



Overall Length	Order Code
150mm	-4200K

SOCKETS & ACCESSORIES - 1/4" SQUARE DRIVE

GROUP
282

Deep Sockets

A/F
Manufactured from high grade chrome vanadium which is fully chromed, aluminium free and with a high polish mirror finish. Side-Drive® bi-hexagon sockets are designed to reduce stress and damage to fasteners.

new



Size	Overall Length	Order Code
3/16"	50mm	-4580K
7/32"	50mm	-4581K
1/4"	50mm	-4582K
9/32"	50mm	-4583K
5/16"	50mm	-4584K
11/32"	50mm	-4585K
3/8"	50mm	-4586K
7/16"	50mm	-4588K
1/2"	50mm	-4590K

Screwdriver Bit Sockets

1/4" Often used in the automotive and aerospace industries. The weight to strength ratio ensures the reliability and accessibility that is important in this type of environment. Manufactured from high grade chrome vanadium which is fully chromed, aluminium free and with a high polish mirror finish. All have ball retaining grooves. Conform to DIN standards.

new



Size	Bit Length (mm)	Overall Length (mm)	Weight each	Order Code
Hexagon				
3mm	15	36	16g	-4790K
4mm	15	36	16g	-4800K
5mm	15	36	17g	-4810K
6mm	15	36	18g	-4820K
8mm	15	36	19g	-4830K
Crosspoint				
No.2	15	36	16g	-4760K
No.3	15	36	17g	-4770K
TX				
T15	15	36	16g	-4690K
T20	15	36	16g	-4691K
T25	15	36	16g	-4692K
T30	15	36	17g	-4694K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

529



A/F

Manufactured from high grade chrome vanadium which is fully chromed, aluminium free and with a high polish mirror finish. Side-Drive® bi-hexagon sockets are designed to reduce stress and damage to fasteners.

new



Size	Overall Length	Order Code YMT-582
3/16"	25mm	-4450K
7/32"	25mm	-4460K
1/4"	25mm	-4470K
9/32"	25mm	-4480K
5/16"	25mm	-4490K
11/32"	25mm	-4500K
3/8"	25mm	-4510K
7/16"	25mm	-4520K
1/2"	25mm	-4530K

Extension Bars



Manufactured from high grade chrome vanadium which is fully chromed, aluminium free and with a high polish mirror finish.



new

Overall Length	Order Code YMT-582
50mm	-4060K
100mm	-4080K
150mm	-4100K

Universal Joint



Hinged through 180° in both directions. Manufactured from high grade chrome vanadium which is fully chromed, aluminium free and with a high polish mirror finish.

new



Overall Length	Order Code YMT-582
40mm	-4160K

Standard Sockets



Metric

Manufactured from high grade chrome vanadium which is fully chromed, aluminium free and with a high polish mirror finish. Side-Drive® bi-hexagon sockets are designed to reduce stress and damage to fasteners.

new



Size	Overall Length	Order Code YMT-582
4.0mm	25mm	-4300K
4.5mm	25mm	-4310K
5.0mm	25mm	-4320K
5.5mm	25mm	-4330K
6.0mm	25mm	-4340K
7.0mm	25mm	-4350K
8.0mm	25mm	-4360K
9.0mm	25mm	-4370K
10.0mm	25mm	-4380K
11.0mm	25mm	-4390K
12.0mm	25mm	-4400K
13.0mm	25mm	-4410K
14.0mm	25mm	-4420K

Wobble Extension Bar



For use in areas where clearance may be a problem the 'wobble' square drive can be used at an angle of up to 15°. Manufactured from high grade chrome vanadium which is fully chromed, aluminium free and with a high polish mirror finish.

new



Overall Length	Order Code YMT-582
150mm	-4110K

Flexible Extension



Manufactured from high grade chrome vanadium which is fully chromed, aluminium free and with a high polish mirror finish.

new



Overall Length	Order Code YMT-582
150mm	-4140K


 Conform to **DIN3124**.

KENGRIP
Patented Design

- Grips fasteners which are up to 95% rounded off.
- Will not damage worn or rusted fasteners.
- Also fits a wide range of non-metric Hexagons and E-Torx® Drive Sizes.
- Fully chrome plated finish for easy clean.
- Unique 'Double-Knurl' for high grip.
- Aluminium-free finish.


Will also fit a wide range of non-metric Hexagons and E-Torx® Drive Sizes.
1/4" Square Drive

Size	Overall Length	Order Code KEN-582
4.0mm	25.0	-4161K
4.5mm	25.0	-4162K
5.0mm	25.0	-4163K
5.5mm	25.0	-4164K
6.0mm	25.0	-4165K
7.0mm	25.0	-4166K
8.0mm	25.0	-4167K
9.0mm	25.0	-4168K
10.0mm	25.0	-4169K
11.0mm	25.0	-4170K
12.0mm	25.0	-4171K
13.0mm	25.0	-4172K
14.0mm	25.0	-4173K

Screwdriver Bits

 1/4" Manufactured from high quality chrome vanadium, fully polished finish. Conform to **DIN**.

Overall length: 37mm.
Bit length: 19mm.


Type	Size	Order Code KEN-582
Slotted	4.0mm	-4700K
	5.5mm	-4710K
	7.0mm	-4730K
Cross Point	No.1	-4750K
	No.2	-4760K
	No.3	-4770K
	No.4	-4780K
Hexagon	3.0mm	-4790K
	4.0mm	-4800K
	5.0mm	-4810K
	6.0mm	-4820K
	8.0mm	-4830K
	1/8"	-4840K
	5/32"	-4850K
	3/16"	-4860K
Torx	7/32"	-4870K
	1/4"	-4880K
	5/16"	-4890K
	T6	-4685K
	T7	-4686K
	T8	-4687K
	T9	-4688K
	T10	-4689K
	T15	-4690K
	T20	-4691K
	T25	-4692K
	T27	-4693K
	T30	-4694K
	T40	-4695K

SOCKETS & ACCESSORIES - 1/4" SQUARE DRIVE
**GROUP
582**
Standard & Deep Pockets Sockets


Ideal for assembly and servicing of small precision mechanisms associated with electrical, electronic, ignition and refrigeration work. All bi-hexagon unless stated.



Double knurl feature gives a high grip which is essential for a quick tool change when your hands are greasy/oily. The 12 point bi-hexagon side drive design will give a higher torque than normal sockets. Manufactured from chrome vanadium, fully chrome plated with a mirror finish and aluminium-free. Chamfered leading edge ensures easy fastener location.



Size (mm)	Overall Length	Weight each	Order Code KEN-582
Metric			
4.0	25mm	10g	-4300K
4.5	25mm	10g	-4310K
5.0	25mm	10g	-4320K
5.5	25mm	10g	-4330K
6.0	25mm	10g	-4340K
7.0	25mm	20g	-4350K
8.0	25mm	20g	-4360K
9.0	25mm	20g	-4370K
10.0	25mm	20g	-4380K
11.0	25mm	30g	-4390K
12.0	25mm	30g	-4400K
13.0	25mm	30g	-4410K
14.0	25mm	40g	-4420K

Size (mm)	Overall Length	Weight each	Order Code KEN-582
Metric (Single Hex)			
4.0	25mm	10g	-4540K
5.0	25mm	10g	-4542K
5.5	25mm	10g	-4543K
6.0	25mm	10g	-4544K
7.0	25mm	20g	-4545K
8.0	25mm	20g	-4546K
9.0	25mm	20g	-4547K
10.0	25mm	20g	-4548K
11.0	25mm	30g	-4549K
12.0	25mm	30g	-4550K
13.0	25mm	30g	-4551K
14.0	25mm	40g	-4552K

Size (mm)	Overall Length	Weight each	Order Code KEN-582
Metric (Deep)			
4.0	50mm	10g	-4670K
4.5	50mm	10g	-4671K
5.0	50mm	10g	-4672K
5.5	50mm	10g	-4673K
6.0	50mm	10g	-4674K
7.0	50mm	20g	-4675K
8.0	50mm	20g	-4676K
9.0	50mm	20g	-4677K
10.0	50mm	20g	-4678K
11.0	50mm	30g	-4679K
12.0	50mm	30g	-4680K
13.0	50mm	30g	-4681K
14.0	50mm	40g	-4682K

Size (mm)	Overall Length	Weight each	Order Code KEN-582
Metric (Single Hex Deep)			
6.0	50mm	10g	-4566K
7.0	50mm	10g	-4567K
8.0	50mm	10g	-4568K
9.0	50mm	10g	-4569K
10.0	50mm	10g	-4570K
11.0	50mm	20g	-4571K
12.0	50mm	20g	-4572K
13.0	50mm	20g	-4573K
14.0	50mm	40g	-4574K

Universal Joint

1/4" Hinged through 180° in both directions. Knurled for extra grip.

Drive male x female:

1/4" x 1/4".

 Overall Length
40mm
Order Code
KEN-582
-4160K

Hex Bit Adaptor

1/4" Chrome vanadium. Converts square drive tooling to use hexagon bits.

 Square Drive x Hex
1/4" x 1/4" 25mm
Order Code
KEN-582
-4230K

Double Ended Lug

For connecting two female square drives

 Drive Female x Male
1/4" x 1/4" 25mm
Order Code
KEN-582
-4240K

Drive Converter

For using a combination of square drive sockets in one application.

 Drive Female x Male
1/4" x 3/8" 27mm
3/8" x 1/4" 37mm
Order Code
KEN-582
-4220K
-5180K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

SENATOR
 QUALITY TOOLING

**Disc Type
Rubber Handle**


3/8 With disc for reversing without having to remove the socket or accessory. 28 tooth ratchet mechanism. Easy to maintain, service kit available.



Overall Length	Number of Teeth	Weight each	Order Code
200mm	40	345g	SEN-582 -4940K

KENNEDY
 PROFESSIONAL

**Disc Type
Steel Handle**


3/8 Basic wrench with high polished finish. Fitted with spring loaded ball bearing socket retainer.



Overall Length	Number of Teeth	Weight each	Order Code
200mm	42	380g	KEN-582 -4900K

Lever Reversible Rubber Handle

3/8 Chrome vanadium. Rubber grip, 72 tooth ratchet. With thumb lever for reversing without having to remove the socket or accessory. With quick release. A high quality wrench for the professional user.



Overall Length	Number of Teeth	Weight each	Order Code
200mm	72	215g	KEN-582 -4942K

Swivel Handles

3/8 The hinged link allows operation at varied angles to aid access in restricted areas.


-5060K

-5160K

Grip	Overall Length	Weight each	Order Code
Steel	225mm	310g	KEN-582 -5060K
Rubber	225mm	225g	-5160K

Heavy Duty American Pattern


Grip	Overall Length	Weight each	Order Code
American	375mm	310g	KEN-582 -5065K
Components			
Replacement Knuckle			-5068K

SENATOR
 QUALITY TOOLING

**Lever Reversible
Rubber Handle**

new

3/8 Chrome vanadium. Rubber grip, 72 tooth ratchet. With thumb lever for reversing. Quick release.


Ratchet Repair Kits

Overall Length	Order Code	To suit Ratchet Number	Order Code
200mm	SEN-582 -4950K	SEN-582-4010K	SEN-582 -4015K
		SEN-582-4950K	-4955K

YAMOTO
 INDUSTRIAL SOCKET SETS

**Quick Release
Ratchet Handle**


3/8 With thumb lever for reversing without having to remove the socket or accessory. Highly polished chrome vanadium with rubber grip.



Overall Length	Number of Teeth	Weight each	Order Code
200mm	72	345g	YMT-582 -4942K

KENNEDY
 PROFESSIONAL

**Push Through
Rubber Handle**


3/8 A very economic wrench with a one way ratchet. Push through square drive allows left and right hand operation.



Overall Length	Number of Teeth	Weight each	Order Code
200mm	41	205g	KEN-582 -4930K

Clutch Type Drive Push Through Steel Handles

3/8 Chrome - molybdenum with mirror polished finish. Clutch type drive action. Push through square drive, needs only 3% movement to operate ratchet.



Type	Overall Length	Weight each	Order Code
Standard	180mm	220g	KEN-582 -4945K
Stubby	105mm	120g	-4948K

Lever Reversible Steel Handle

3/8 Fully chromed all steel handle with thumb lever for reversing without having to remove the socket or accessory.



Overall Length	Number of Teeth	Weight each	Order Code
200mm	72	205g	KEN-582 -4932K

YAMOTO
 INDUSTRIAL SOCKET SETS

**Swivel
Handle**


3/8 Chrome finish. American style handle.



Overall Length	Weight each	Order Code
225mm	310g	YMT-582 -5060K

Lever Reversible Rubber Handle

3/8 Chrome vanadium. Rubber grip, 72 tooth ratchet. With thumb lever for reversing. Quick release.

new

Ratchet Repair Kits

Overall Length	Order Code	To suit Ratchet Number	Order Code
200mm	YMT-582 -4944K	YMT-582-4010K	YMT-582 -4015K
		YMT-582-4944K	-4945K

Manufactured from high quality chrome vanadium with a fully polished finish. All with knurled 'finger grip'.

Standard



Wobble



Locking

Standard

Overall Length	Weight each	Order Code KEN-582
75mm	80g	-4960K
125mm	130g	-4980K
150mm	150g	-5000K
250mm	280g	-5020K
300mm	340g	-5050K
450mm	430g	-5070K

Locking

A lever at the ratchet end of the extension pushes down a rod inside the bar which locks out the socket retaining ball, securing the socket to the bar. Ideal for use where there is a risk of leaving a socket in a recess.

Overall Length	Weight each	Order Code KEN-582
300mm	15g	-5150K

Wobble

In areas where clearance may be a problem the 'wobble' square drive can be used at an angle of up to 15°.

Overall Length	Weight each	Order Code KEN-582
75mm	65g	-5110K
150mm	120g	-5120K
250mm	260g	-5140K



Type	Overall Length (mm)	Weight each	Order Code YMT-582
Standard	75	75g	-4960K
Standard	150	145g	-5000K
Wobble	250	235g	-5140K

Composite Ratchet Handle

3/8 With reverse lever, push button quick release. Offset handle to help eliminate knuckle scrapes. 72-tooth gear drive for maximum power and chrome vanadium core for strength.



Overall Length	Number of Teeth	Weight each	Order Code YMT-582
200mm	72	235g	-7510K

Spinner Handle Fixed Type



Overall Length	Weight each	Order Code YMT-582
150mm	240g	-5100K

Sliding 'T' Handle



Overall Length	Weight each	Order Code YMT-582
165mm	185g	-4920K

Universal Joint

3/8 High polished chrome finish. Hinged through 180° in both directions.



Drive Male x Female	Overall Length	Weight each	Order Code YMT-582
3/8" x 3/8"	50mm	60g	-5040K

3/8 Hinged through 180° in both directions. Knurled for extra grip.



Drive Male x Female	Overall Length	Weight each	Order Code KEN-582
3/8" x 3/8"	50mm	60g	-5040K

3/8 Chrome vanadium steel blade, polypropylene handle and spring loaded bearing socket retainer.



Overall Length	Weight each	Order Code KEN-582
210mm	240g	-5100K

Sliding 'T' Handle

3/8 Made from high quality chrome vanadium with a fully polished finish. The sliding bar gives many options for leverage within any space.



Overall Length	Weight each	Order Code KEN-582
165mm	185g	-4920K

Speed Braces

3/8 Manufactured from high quality chrome vanadium, fully polished finish. Ideal for nut spinning.



Grip	Overall Length	Weight each	Order Code KEN-582
American Pattern	425mm	500g	-5090K
Rubber Grip	470mm	410g	-5030K
Rubber Grip	400mm	470g	-5080K

**Rubber Grip
KEN -582-5080K**

TX Sockets

Chrome vanadium. For use with male headed TX fasteners commonly found in the automotive industry. 29mm overall length and each weighing 45g.

Size	Order Code KEN-582
E6	-5960K
E8	-5962K
E10	-5964K
E12	-5966K
E14	-5968K
E16	-5970K



PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

© 2018

Standard Length
Sockets**KENGRIIP****KENNEDY
PROFESSIONAL****YAMOTO**
INDUSTRIAL SOCKET SETS

Type	Size	Overall Length	Weight each
Metric	6mm	26	30g
	7mm	26	30g
	8mm	26	30g
	9mm	26	30g
	10mm	26	30g
	11mm	26	30g
	12mm	26	30g
	13mm	26	30g
	14mm	30	40g
	15mm	30	40g
	16mm	30	50g
AF	17mm	30	60g
	18mm	30	70g
	19mm	30	70g
	20mm	30	80g
	21mm	30	80g
	22mm	27	100g
	1/4"	27	30g
	5/16"	27	30g
	11/32"	27	30g
	3/8"	27	30g
	7/16"	27	30g
Whit	1/2"	27	30g
	9/16"	27	40g
	5/8"	27	50g
	11/16"	30	60g
	3/4"	25	70g
	13/16"	27	80g
	7/8"	27	10g
	1/8"	27	35g
	3/16"	27	45g
	1/4"	30	45g
	5/16"	30	45g
	3/8"	30	45g
	7/16"	30	85g
	1/2"	30	120g

Order Code
KEN-582

-5832K
-5833K
-5834K
-5835K
-5836K
-5837K
-5838K
-5839K
-5840K
-5841K
-5842K
-5843K
-5844K
-5845K
-5846K
-5847K
-5848K

Order Code
KEN-582

-5240K
-5250K
-5260K
-5270K
-5280K
-5290K
-5300K
-5310K
-5320K
-5330K
-5340K
-5350K
-5360K
-5370K
-5380K
-5390K
-5400K
-5430K
-5440K
-5450K
-5460K
-5470K
-5480K
-5490K
-5500K
-5510K
-5520K
-5530K
-5540K
-5580K
-5590K
-5600K
-5610K
-5620K
-5630K
-5640K

Order Code
YMT-582

-5240K
-5250K
-5260K
-5270K
-5280K
-5290K
-5300K
-5310K
-5320K
-5330K
-5340K
-5350K
-5360K
-5370K
-5380K
-5390K
-5400K
-5430K
-5440K
-5450K
-5460K
-5470K
-5480K
-5490K
-5500K
-5510K
-5520K
-5530K
-5540K
-
-
-
-
-
-
-

KENGRIIP

Patented Design

Conform to DIN3124.
3/8" Square DriveSee Page **526**

Deep Sockets

Type	Size	Overall Length	Weight each
Metric	8mm	62	40g
	9mm	62	40g
	10mm	62	50g
	11mm	62	50g
	12mm	62	60g
	13mm	62	60g
	14mm	62	70g
	15mm	62	100g
	16mm	62	115g
	17mm	62	130g
	18mm	64	120g
AF	19mm	64	140g
	21mm	64	155g
	22mm	64	200g
	3/8"	63	45g
	7/16"	63	50g
	1/2"	63	60g
	9/16"	63	60g
	5/8"	65	110g
	11/16"	65	120g
	3/4"	65	135g
	13/16"	65	160g

3/8" Square Drive

Order Code
KEN-582

-5849K
-5850K
-5851K
-5852K
-5853K
-5854K
-5855K
-5856K
-5857K
-5858K
-5859K
-5860K
-5861K
-5862K
-
-
-
-
-
-
-
-
-
-

Order Code
KEN-582

-5700K
-5710K
-5720K
-5730K
-5740K
-5750K
-5760K
-5770K
-5780K
-5790K
-5800K
-5810K
-5820K
-5830K
-5870K
-5880K
-5890K
-5900K
-5910K
-5920K
-5930K
-5940K

Order Code
YMT-582

-
-
-5720K
-5730K
-5740K
-5750K
-5760K
-5770K
-
-5790K
-
-5810K
-
-5830K
-5870K
-5880K
-5890K
-5900K
-5910K
-5920K
-5930K
-5940K

Single Hexagon
Standard Length

Type	Size	Overall Length	Weight each	Order Code KEN-582
Metric	6mm	26	30g	-5544K
	7mm	26	30g	-5555K
	8mm	26	30g	-5556K
	9mm	26	30g	-5557K
	10mm	26	30g	-5558K
	11mm	26	30g	-5559K
	12mm	26	30g	-5560K
	13mm	26	30g	-5561K
	14mm	30	40g	-5562K
	15mm	30	40g	-5563K
	16mm	30	50g	-5564K
Single Hex	17mm	30	60g	-5565K
	18mm	30	70g	-5566K
	19mm	30	70g	-5567K

Group **594**

**KENNEDY
PROFESSIONAL****Double
Lug****3/8** Chrome vanadium.
For connecting two
female square
drives. 25mm long.

Drive Male x Male	Weight each	Order Code KEN-582
3/8" x 3/8"	10g	-5170K

**Female/Male Converters****3/8** Chrome vanadium. For
using a combination
of socketry in the
same application.

Drive Female x Male	Weight each	Order Code KEN-582
3/8" x 1/4"	20g	-5180K
3/8" x 1/2"	40g	-5190K
1/2" x 3/8"	50g	-6700K

Hex Bit Adaptor**3/8** Chrome vanadium.
For converting
square drive tooling to
use hexagon bits.

Drive x Hex	Overall Length	Weight each	Order Code KEN-582
3/8" x 1/4"	30mm	30g	-5200K

Spark Plug Sockets**3/8** For insertion and removal of spark
plugs. Neoprene insert helps retain
the plug and protect the insulation
material from damage.

Size (Plug)	Overall Length	Weight each	Order Code KEN-582
M10	65mm	110g	-5670K
M12	65mm	110g	-5680K
M14	68mm	140g	-5660K

**YAMOTO
INDUSTRIAL SOCKET SETS****Spark Plug
Sockets****3/8** For insertion and removal of spark
plugs. Neoprene insert helps retain
the plug and protect the insulation
material from damage.

Size (Plug)	Overall Length	Weight each	Order Code YMT-582
M10	65mm	110g	-5670K
M14	68mm	140g	-5660K

Hex Bit Adaptor**3/8** Chrome
vanadium. For
converting square
drive tooling to
use hexagon bits.

Drive x Hex	Overall Length	Weight each	Order Code YMT-582
3/8" x 1/4"	30mm	15g	-5200K

**Range
Available****KENGRIP®
Patented Design****See Page
526**Grips
without
damagingGrips up
to 95%
rounded
off**SOCKETS & ACCESSORIES - 3/8" SQUARE DRIVE****GROUP
582****Screwdriver Bit Sockets**Often used in the automotive and
aerospace industries. The weight
to strength ratio ensures the
reliability and accessibility that is
important in this type of
environment. Made from chrome
vanadium steel, fully chrome
plated with a mirror finish and
aluminium-free. All have ball
retaining grooves.Conform to **DIN** standards.**KENNEDY
PROFESSIONAL****YAMOTO
INDUSTRIAL SOCKET SETS**

Size	Bit Lgth (mm)	Overall Lgth (mm)	Weight each
Hexagon			
3mm	20	50	25g
4mm	20	50	30g
5mm	20	50	30g
6mm	20	50	35g
8mm	20	50	45g
10mm	20	50	55g
1/8"	20	50	25g
5/32"	20	50	30g
3/16"	20	50	30g
7/32"	20	50	35g
1/4"	20	50	40g
5/16"	20	50	45g
3/8"	20	50	55g

Crosspoint			
No 1	20	50	50g
No 2	20	50	50g
No 3	20	50	55g
No 4	20	50	55g

PZ			
No 1	20	50	50g
No 2	20	50	50g
No 3	20	50	55g

Slotted			
3/16"	20	50	50g
7/32"	20	50	50g
1/4"	20	50	55g

TX			
T6	20	50	50g
T7	20	50	50g
T8	20	50	50g
T9	20	50	50g
T10	20	50	50g
T15	20	50	50g
T20	20	50	55g
T25	20	50	50g
T27	20	50	55g
T30	20	50	55g
T40	20	50	55g
T45	20	50	55g
T50	20	50	55g

Order Code
KEN-582Order Code
YMT-582
-6000K
-6010K
-6020K
-6030K
-6040K
-6050K
-6080K
-6090K
-6100K
-6110K
-6120K
-6130K
-6140K
-6000K
-6010K
-6020K
-6030K
-6040K
-6050K
-
-
-
-
-
-
-
-6201K
-6202K
-6203K
-6204K
-6201K
-6202K
-6203K
-
-6211K
-6212K
-6213K
-
-
-
-6222K
-6223K
-6224K
-6222K
-
-6224K
-6231K
-6232K
-6233K
-6234K
-6235K
-6236K
-6237K
-6238K
-6239K
-6241K
-6242K
-6243K
-6244K
-
-
-
-
-6235K
-6236K
-6237K
-6238K
-
-6241K
-6242K
-
-6244K
**KENNEDY
PROFESSIONAL****Long Screwdriver Bit Sockets &
Socket Bit Sets**Ideal for accessing deep seated bolts that have been fitted knurled bodies for extra
grip. Made from S2 chrome vanadium. Supplied on storage rail.**Hexagon****6 Piece Set Contents:**
4, 5, 6, 7, 8, 10mm.**TX****6 Piece Set Contents:**
T20, T25, T30, T40 T45 and T50**Bit Sets**

Description	Weight each	Order Code KEN-582
Hexagon 6 Piece Set	310g	-6324K
TX 6 Piece Set	410g	-6340K

Individual Bits - Hexagon

Size	Overall Length	Weight each	Order Code KEN-582
4mm	100mm	40g	-6314K
5mm	100mm	40g	-6315K
6mm	100mm	45g	-6316K
7mm	100mm	45g	-6317K
8mm	100mm	55g	-6318K
10mm	100mm	65g	-6320K

Individual Bits - TX

Size	Overall Length	Weight each	Order Code KEN-582
T20	95mm	65g	-6330K
T25	95mm	65g	-6331K
T30	95mm	65g	-6332K
T40	95mm	65g	-6334K
T45	95mm	65g	-6335K
T50	95mm	65g	-6336K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**535**

1/2" DRIVE: The most popular drive size used in the service and maintenance industries. This popularity is due to its strength and robust nature.

KENNEDY PROFESSIONAL Lever Reversible Rubber Handle

1/2" Chrome vanadium. Rubber grip, 72 tooth ratchet. With thumb lever for reversing without having to remove the socket or accessory. With quick release. A high quality wrench for the professional user.



Overall Length	Number of Teeth	Weight each	Order Code
240mm	72	430	KEN-582 -6422K

Push Through Rubber Handle

1/2" A very economic wrench with a one way ratchet. Push through square drive allows left and right hand operation.



Overall Length	Number of Teeth	Weight each	Order Code
270mm	30	500g	KEN-582 -6430K

Lever Reversible Steel Handle

1/2" Fully chromed all steel handle with thumb lever for reversing without having to remove the socket or accessory.



Overall Length	Number of Teeth	Weight each	Order Code
250mm	72	510g	KEN-582 -6412K

Lever Reversible Steel Handle Flexi-Joint

1/2" Fully chromed lever type. All steel handle. The hinged joint gives additional capability in areas of restricted access.



Type	Overall Length	Weight each	Order Code
Standard	420	860g	KEN-582 -6370K
Stubby	198	110g	-6375K

YAMOTO INDUSTRIAL SOCKET SETS Universal Joint

1/2" Hinged through 180° in both directions. Knurled for extra grip.



Drive M x F	Overall Length	Weight each	Order Code
1/2" x 1/2"	75mm	155g	YMT-582 -6580K

Rubber Ratchet Handle

1/2" Fully chromed all steel handle with thumb lever for reversing without having to remove the socket or accessory. 72 tooth ratchet.



Overall Length	Order Code	To suit Ratchet Number	Order Code
250mm	YMT-582 -6414K	YMT-582-6414K	YMT-582 -6415K

new

Ratchet Repair Kits

Push Through Steel Handle - Gearless

1/2" Chrome - molybdenum with mirror polished finish. Push through square drive, needs only 3% movement to operate gearless ratchet.



Overall Length	Weight each	Order Code
250mm	470g	KEN-582 -6435K

Disc Type Steel Handle

1/2" Basic wrench with high polished finish. Fitted with spring loaded ball bearing socket retainer.



Product Number	Number of Teeth	Weight each	Order Code
245mm	44	655g	KEN-582 -6400K

YAMOTO INDUSTRIAL SOCKET SETS Quick Release Ratchet Handle

1/2" With thumb lever for reversing without having to remove the socket or accessory. Highly polished chrome vanadium with rubber grip.



Overall Length	Number of Teeth	Weight each	Order Code
250mm	72	510g	YMT-582 -6412K

Composite Ratchet Handle

1/2" With reverse lever, push button quick release and an offset handle very hard wearing.



Overall Length	Number of Teeth	Weight each	Order Code
250mm	72	435g	YMT-582 -7512K

SENATOR QUALITY TOOLING Lever Reversible Rubber Handle

1/2" With thumb lever for reversing without having to remove the socket or accessory. Highly polished chrome vanadium with rubber grip.



Overall Length	Number of Teeth	Weight each	Order Code
245mm	44	640g	SEN-582 -6400K

Universal Joint

1/2" Hinged through 180° in both directions. Knurled for extra grip.



Drive M x F	Overall Length	Weight each	Order Code
1/2" x 1/2"	75mm	155g	KEN-582 -6580K

Rubber Ratchet Handle

1/2" Chrome vanadium. Rubber grip, 72 tooth ratchet. With thumb lever for reversing. Quick release.



new

Ratchet Repair Kits

Overall Length	Order Code	To suit Ratchet Number	Order Code
245mm	SEN-582 -6410K	SEN-582-6410K	SEN-582 -6415K

KENNEDY PROFESSIONAL Speed Braces

- 1/2 Rubber grip, for fast nut spinning. Manufactured from high quality chrome vanadium, fully polished finish. Ideal for nut spinning.



Handle Type	Overall Length	Weight each	Order Code KEN-582
Rubber Grip	400mm	470g	-6560K
Steel Grip	425mm	510g	-6600K

Extension Bars

- 1/2 Manufactured from high quality chrome vanadium with a fully polished finish. All with knurled 'finger grip'.

Standard



Overall Length	Weight each	Order Code KEN-582
75mm	140g	-6460K
125mm	225g	-6480K
250mm	440g	-6500K
375mm	630g	-6520K
450mm	735g	-6530K

Wobble

In areas where clearance may be a problem the 'wobble' square drive can be used at an angle of up to 15°.



Overall Length	Weight each	Order Code KEN-582
75mm	65g	-6630K
125mm	120g	-6640K
250mm	260g	-6660K

Sliding 'T' Handle

- 1/2 Manufactured from high quality chrome vanadium with a fully polished finish. The sliding bar will give many options for leverage within a given space.



Overall Length	Weight each	Order Code KEN-582
250mm	360g	-6440K

YAMOTO INDUSTRIAL SOCKET SETS Sliding 'T' Handle

- 1/2 Manufactured from high quality chrome vanadium with a fully polished finish. The sliding bar will give many options for leverage within a given space.



Overall Length	Order Code YMT-582
250mm	-6370K

Extension Bars

Standard

- 1/2 Chrome finish.



Overall Length	Weight each	Order Code YMT-582
75mm	125g	-6460K
125mm	195g	-6480K
250mm	385g	-6500K

KENNEDY PROFESSIONAL Swivel Handles

- 1/2 The hinged link allows operation at varied angles to aid access in restricted areas.

American Grip




American Grip - Heavy Duty

Grip	Overall Length	Weight each	Order Code KEN-582
Rubber	300mm	645g	-6570K
American	375mm	540g	-6540K
American	450mm	830g	-6550K

Grip	Overall Length	Weight each	Order Code KEN-582
Heavy Duty			
American	450mm	1099g	-6545K
American	600mm	1376g	-6555K
Service Parts			
Replacement Knuckle			-6548K

1/2 Flexi-Ring End Sockets

Made from polished chrome vanadium. These tough flexi-ring end sockets are designed to allow access over long studs and for awkwardly positioned nuts and bolts. Swivels through 220°.



Type	Size	Overall Length	Weight each	Order Code KEN-582
Metric	13mm	70mm	124g	-1180K
	14mm	70mm	123g	-1181K
	15mm	70mm	121g	-1182K
	16mm	70mm	119g	-1183K
	17mm	77mm	158g	-1184K
	19mm	77mm	152g	-1185K
	22mm	82mm	193g	-1186K
	24mm	86mm	213g	-1187K

8 Piece Metric Set Contents:

13, 14, 15, 16, 17, 19, 22, and 24mm. Supplied with a sturdy hanging rail.



Number of Pieces	Contents	Weight each	Order Code KEN-582
8	As above	1.3kg	-1190K

Offset Fixed Handle

- 1/2 Knurled grip. Chrome vanadium. Fixed wrench for applications requiring rigid set up.



Overall Length	Weight each	Order Code KEN-582
200mm	255g	-6590K

YAMOTO INDUSTRIAL SOCKET SETS Swivel Handles

- 1/2 With hinged link and rubber grip.



Overall Length	Weight each	Order Code YMT-582
300mm	645g	-6570K
380mm	770g	-6575K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

Bi-Hexagon Standard Length Sockets
KENGRIP®
**KENNEDY
PROFESSIONAL**
**YAMOTO
INDUSTRIAL SOCKET SETS**

Type	Size	Overall Length	Weight each
Metric	8mm	36	50g
	9mm	37	50g
	10mm	37	50g
	11mm	37	50g
	12mm	37	50g
	13mm	37	50g
	14mm	37	50g
	15mm	37	60g
	16mm	37	60g
	17mm	37	60g
	18mm	37	80g
	19mm	37	70g
	20mm	37	80g
	21mm	37	70g
	22mm	37	90g
	23mm	37	110g
	24mm	37	110g
	25mm	40	150g
AF	26mm	40	140g
	27mm	40	170g
	28mm	40	170g
	29mm	40	170g
	30mm	45	210g
	32mm	45	230g
	33mm	45	230g
	36mm	45	245g
	5/16"	37	50g
	3/8"	37	50g
	7/16"	37	50g
	1/2"	37	50g
	9/16"	37	50g
	19/32"	37	60g
	5/8"	37	60g
	11/16"	37	60g
	3/4"	37	70g
Whit	13/16"	37	80g
	7/8"	40	90g
	15/16"	40	110g
	1"	40	130g
	1 1/16"	40	160g
	1 1/8"	40	170g
	1 3/16"	45	200g
	1 1/4"	45	230g
	1 1/8"	37	50g
	3/16"	37	50g
	1/4"	37	50g
	5/16"	37	60g
	3/8"	37	50g
	7/16"	37	70g
	1/2"	40	90g
	9/16"	40	140g
	5/8"	40	170g
	1 1/16"	45	220g
	3/4"	45	220g

Order Code
KEN-582

Order Code
KEN-582

Order Code
YMT-582

-6871K
-6872K
-6873K
-6874K
-6875K
-6876K
-6877K
-6878K
-6879K
-6880K
-6881K
-6882K
-6883K
-6884K
-6885K
-6886K
-6887K
-6888K
-6889K
-6890K
-6891K
-6892K
-6893K
-6895K
-6898K
-6899K

-6900K
-6910K
-6920K
-6930K
-6940K
-6950K
-6960K
-6970K
-6980K
-6990K
-7000K
-7010K
-7020K
-7030K
-7040K
-7050K
-7060K
-7070K
-7080K
-7090K
-7100K
-7110K
-7120K
-7130K
-7140K
-7150K
-7160K
-7170K
-7180K
-7190K
-7200K
-7210K
-7220K
-7230K
-7240K
-7250K
-7260K
-7270K
-7280K
-7290K
-7300K
-7310K
-7320K
-7380K
-7390K
-7400K
-7410K
-7420K
-7430K
-7440K
-7450K
-7460K
-7470K
-7480K

-6900K
-6910K
-6920K
-6930K
-6940K
-6950K
-6960K
-6970K
-6980K
-6990K
-7000K
-7010K
-7020K
-7030K
-7040K
-7050K
-7060K
-7070K
-7080K
-7090K
-7100K
-7110K
-7120K
-7130K
-7140K
-7150K
-7160K
-7170K
-7180K
-7190K
-7200K
-7220K
-7230K
-7240K
-7250K
-7260K
-7270K
-7280K
-7290K
-7300K
-7320K
-7390K
-7400K
-7410K
-7420K
-7430K
-7440K
-7450K
-7460K

KENNEDY Single Hexagon
Standard Length Sockets

Six point - offer a more positive location, particularly on worn or rounded nuts, but require a one-sixth turn to engage the next point of the socket.



Type	Size	Overall Length	Weight each	Order Code KEN-582
Metric	8mm	36	50g	-7346K
	9mm	37	50g	-7347K
	10mm	37	50g	-7348K
	11mm	37	50g	-7349K
	12mm	37	50g	-7350K
	13mm	37	50g	-7351K
	14mm	37	50g	-7352K
	15mm	37	60g	-7353K
	16mm	37	60g	-7354K
	17mm	37	60g	-7355K
	18mm	37	80g	-7356K
	19mm	37	70g	-7357K
	20mm	37	80g	-7358K
	21mm	37	70g	-7359K
	22mm	37	90g	-7360K
	23mm	37	110g	-7361K
	24mm	37	110g	-7362K
	26mm	40	140g	-7364K
AF	27mm	40	170g	-7365K
	28mm	40	170g	-7366K
	30mm	45	210g	-7368K
	32mm	45	230g	-7370K
	36mm	45	245g	-7374K
	1 1/16"	40	160g	-7363K
	1 1/8"	40	170g	-7367K
	1 3/16"	45	200g	-7369K
	1 1/4"	45	230g	-7373K
	1 1/2"	45	245g	-7375K

**Bi-Hexagon
Deep Sockets**


Type	Size	Overall Length	Weight each	Order Code KEN-582
Metric	10mm	77	100g	-7530K
	11mm	77	110g	-7540K
	12mm	77	110g	-7550K
	13mm	77	110g	-7560K
	14mm	77	110g	-7570K
	15mm	77	130g	-7580K
	16mm	77	120g	-7590K
	17mm	77	120g	-7600K
	18mm	77	150g	-7610K
	19mm	77	150g	-7620K
	21mm	77	160g	-7630K
	22mm	77	200g	-7640K
	24mm	77	220g	-7650K
	26mm	77	210g	-7660K
	27mm	77	250g	-7670K
	30mm	77	320g	-7680K
	32mm	77	340g	-7690K
	1 1/2"	77	110g	-7700K
AF	9/16"	77	100g	-7710K
	5/8"	77	120g	-7720K
	11/16"	77	110g	-7730K
	3/4"	77	140g	-7740K
	13/16"	77	160g	-7750K
	7/8"	77	190g	-7760K
	15/16"	77	220g	-7770K
	1"	77	200g	-7780K
	1 1/8"	77	270g	-7790K
	1 1/4"	77	390g	-7800K

KENNEDY PROFESSIONAL E-TX S Sockets

1/2 Chrome vanadium.
For use with male
headed TX fasteners
commonly found in the
automotive industry.



Size (Plug)	Overall Length	Weight each	Order Code KEN-582
E10	37mm	50g	-7485K
E12	37mm	55g	-7487K
E14	37mm	55g	-7489K
E16	37mm	55g	-7491K
E18	37mm	70g	-7493K
E20	37mm	90g	-7495K

Double Ended Lug

1/2 Chrome vanadium.
For connecting two
female square drives.



Drive Male x Male	Weight each	Order Code KEN-582
1/2" x 1/2"	35g	-6750K

Hex Bit Adaptors

1/2 Chrome vanadium.
For converting
square drive tooling
to use hexagon bits.



Drive x Hex	Overall Length	Weight each	Order Code KEN-582
1/2"x3/4"	35mm	40g	-6710K
1/2"x5/16"	75mm	45g	-6720K

Female/Male Converters

1/2 Chrome vanadium. For
using a combination
of square drive socketry in
the same application.



Drive Female x Male	Weight each	Order Code KEN-582
3/8" x 1/2"	40g	-5190K
1/2" x 3/4"	40g	-6680K
1/2" x 3/8"	50g	-6700K
3/4" x 1/2"	55g	-8120K

Spark Plug Sockets

1/2 Designed for insertion/ removal of
spark plugs. The neoprene insert helps
retain the spark plug and protect the
insulation material from accidental damage.
A unique double knurl gives a high grip
essential
for a quick
tool change
when hands
are greasy.



Size (Plug)	Overall Length	Weight each	Order Code KEN-582
M10	65mm	85g	-7520K
M14	67mm	150g	-7500K

YAMOTO INDUSTRIAL SOCKET SETS Spark Plug Sockets

1/2 A neoprene insert helps
retain the spark plug and
protect the insulation
material from accidental damage.
A ball-retaining groove on each
face ensures a positive fit with all
accessories. Chamfered
leading edge
gives easy
location.



Size (Plug)	Overall Length	Weight each	Order Code YMT-582
M10	65mm	85g	-7520K
M14	67mm	150g	-7500K

Screwdriver Bits

For insertion and removal of
fasteners and fixings using
1/2" square drive tooling.
Made from chrome vanadium
steel, fully chrome plated
with a mirror finish and
aluminium-free.
All have ball retaining groove on
each face of the square drive.
Conform to DIN standards.



Size	Bit Lgth (mm)	Overall Lgth (mm)	Weight each
⊖ Slotted			
8mm	20	55	80g
9mm	20	55	80g
10mm	20	55	90g
12mm	20	55	100g
14mm	20	55	130g
16mm	20	55	140g

⊙ Hexagon			
4mm	20	55	80g
5mm	20	55	70g
6mm	20	55	70g
7mm	20	55	70g
7mm	20	100	110g
8mm	20	55	70g
10mm	20	55	80g
12mm	20	55	100g
14mm	20	65	160g
17mm	20	70	205g
19mm	20	70	245g
3/16"	20	55	58g
1/4"	20	55	59g
5/16"	20	55	65g
3/8"	20	55	76g
1/2"	20	55	107g
9/16"	20	55	144g
3/4"	20	70	144g

⊕ Crosspoint			
No.2	20	55	55g
No.3	20	55	65g
No.4	20	55	70g

⊙ PZ			
No.2	17	55	70g
No.3	17	55	75g
No.4	17	55	80g

⊙ TX			
T20	20	58	60
T25	17	55	70
T27	17	55	70
T30	17	55	70
T40	17	55	70
T45	17	55	70
T50	17	55	70
T55	17	55	80
T60	17	55	105
T70	17	55	115

KENNEDY PROFESSIONAL Spline Screwdriver Bit Set

Contains short bits for bolts in tight areas
and long bits for accessing deep seated,
tight fitted spline bolts. Handy storage rail
supplied.



Size Range	Weight each	Order Code KEN-582
M6-M14	665g	-7340K

Individual Bits

Size	Overall Length	Weight each	Order Code KEN-582
M6	55mm	58g	-7322K
M8	55mm	65g	-7324K
M8	100mm	84g	-7326K
M10	100mm	103g	-7328K
M12	100mm	136g	-7330K
M14	100mm	181g	-7332K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR



KENNEDY
PROFESSIONAL
Screwdriver Bit
Socket Sets


1/2 Used most often in the automotive and aerospace industries. The weight to strength ratio ensures the reliability and accessibility that is so important in this type of production environment. For insertion and removal of fasteners and fixings using 1/2" square drive tooling. Unique knurled body gives extra grip which is essential for a quick tool change when your hands are greasy/oily.

Registered Design No. 2053516UK. Manufactured from chrome vanadium steel and are fully chrome plated with a mirror finish and aluminium-free. All have ball retaining groove on each face of the square drive. Conform to **DIN standards**.

Overall length: 55mm. **Bit length:** 20mm.





Engineer's 20 Piece Set Contents:

-  **Crosspoint**
No.2, 3 and 4.
-  **Hexagon**
4, 5, 6, 7, 8, 10, 12, 14, 17 and 19mm,
3/16", 1/4", 5/16", 3/8", 1/2", 9/16" and 3/4".

20
PIECES


Number of Pieces	Weight each	Order Code
20	1.90kg	KEN-582 -7880K

Mechanic's 20 Piece Set Contents:

-  **Slotted:**
8, 9, 12, 14, and 16mm.
-  **TX:**
T20, T25, T27, T30, T40, T45, T50, T55 and T60.
-  **Crosspoint:**
No.2, 3 and 4.
-  **PZ**
No.2, 3 and 4.


20
PIECES


Number of Pieces	Weight each	Order Code
20	2.50kg	KEN-582 -7890K

Hexagon Bit & Adaptor Set

1/2 1/2" square drive bit adaptor set contains a 10mm hex, 1/2" drive hand socket. Supplied in robust storage case.

Set Contents:

-  **Hexagon**
4, 5, 6, 8, 10 and 12mm.

7
PIECES


Number of Pieces	Weight each	Order Code
7	2.55kg	KEN-582 -7900K

Stud Puller Set

1/2 Chrome vanadium clamping rollers grip worn or rounded fixings by compressing onto the fixing as the socket is turned, applying pressure to grip, turn and remove. Unscrews left and right hand threads.

Set Contents: 6mm, 8mm, 10mm, 12mm.

4
PIECES


Number of Pieces	Weight each	Order Code
4	835g	KEN-582 -9480K

Stud Extractor

1/2 Manufactured from chrome alloy steel with a bright nickel and chrome finish. The locking wheel has a black oxidised finish. To use, place the extractor over the stud, then fit any 1/2" square drive handle and turn. The locking wheel moves into place to grip the stud and then remove it. 58mm outside diameter x 65mm high.



Range (mm)	Weight each	Order Code
6 - 19	585g	KEN-582 -6760K

3/4" DRIVE: A heavy duty range designed to cope with the demands of industrial, agricultural machinery and heavy plant, static or mobile.

KENNEDY PROFESSIONAL Swivel Handle

3/4" The hinged link allows operation at varied angles to aid access in restricted areas.



Grip	Overall Length	Weight each	Order Code KEN-582
Knurled	475mm	1.90kg	-8100K

Sliding 'T' Handle


3/4" Manufactured from high quality chrome vanadium with a fully polished finish. Sliding bar gives many options for leverage within a given space.



Overall Length	Weight each	Order Code KEN-582
450mm	1.35kg	-8040K

Offset Fixed Handle

3/4" Knurled grip. Chrome vanadium. Fixed wrench for applications requiring rigid set up.

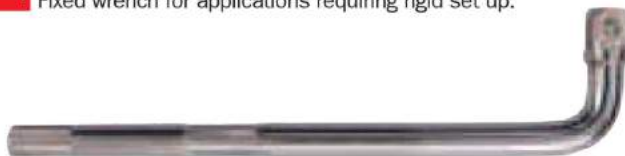

Overall Length	Weight each	Order Code KEN-582
300mm	255g	-8090K

Universal Joint

3/4" Knurled for extra grip. Male x female: M3/4" x 3/4".



Overall Length	Order Code KEN-582
110mm	-8020K

Drive Converters

3/4" For using a combination of square sockets in one application.



Drive F x M	Order Code KEN-582
3/4" x 1"	-8140K
1" x 3/4"	-9140K

Double Ended Lug

3/4" Chrome vanadium. For use in push through ratchets and similar. Male x male: 3/4" x 3/4".



Overall Length	Order Code KEN-582
60mm	-8130K

Bi-Hexagon Sockets

3/4" A heavy duty range designed to cope with the demands of industrial agricultural machinery and heavy plant, static or mobile. All Kennedy Professional sockets have a unique double knurl to give a high grip essential for a quick tool change when hands are greasy. Manufactured from chrome vanadium and fully chrome plated with a mirror finish and aluminium-free. Chamfered leading edge ensures easy fastener location. **Registered Design No. 2053516UK.**



Size	Overall Length	Weight each	Order Code KEN-582
Metric			
22	50mm	210g	-8150K
24	50mm	210g	-8170K
26	50mm	210g	-8190K
27	50mm	210g	-8200K
29	50mm	240g	-8220K
30	53mm	280g	-8230K
32	55mm	280g	-8240K
33	55mm	310g	-8250K
36	55mm	400g	-8260K
38	60mm	450g	-8280K
41	60mm	540g	-8300K
46	60mm	650g	-8320K
50	70mm	800g	-8340K
55	70mm	880g	-8360K
60	70mm	950g	-8380K

Lever Reversible Steel Handle

3/4" Spring loaded ball bearing socket retainer. A high quality wrench for the professional user.



Overall Length	Number of Teeth	Weight each	Order Code KEN-582
500mm	24	2.40kg	-8000K

Disc Type Steel Handle

3/4" 50 tooth reversible ratchet.



Overall Length	Number of Teeth	Weight each	Order Code KEN-582
500mm	50	3.00kg	-8045K

Non-Reversible Rubber Grip Quick Release

3/4" 36 tooth ratchet.



Overall Length	Number of Teeth	Weight each	Order Code KEN-582
480mm	36	1.50kg	-8050K

Extension Bars

3/4" Manufactured from high quality chrome vanadium with a fully polished finish. All with knurled 'finger grip'.



Description	Overall Length	Weight each	Order Code KEN-582
Standard	100mm	432g	-8070K
	200mm	800g	-8060K
	400mm	1900g	-8080K



Lever Type Steel Handle
with Extension



Sliding 'T'-Handle with Extension

Lever Type Steel Handle

- 1** Basic wrench with satin finish. Fitted with spring loaded ball bearing socket retainer.



Overall Length	Number of Teeth	Weight each	Order Code
740mm	40	5.40kg	-8980K

Sliding 'T' Handle

- 1** Manufactured from high quality chrome vanadium with a fully polished finish. The sliding bar will give many options for leverage within a given space.



Overall Length	Weight each	Order Code
640mm	3.10kg	-9020K

Extensions

- 1** Manufactured from high quality chrome vanadium with a fully polished finish. Knurled 'finger grip'.



Overall Length	Weight each	Order Code
200mm	1.00kg	-9040K
400mm	1.80kg	-9060K

Bi-Hexagon Standard Sockets

1 Bi-hexagon. (12 point). This range of 1" (25mm) series sockets is the ultimate for high torque hand applications. The Bi-hexagon design gives strength and reliability under heavy loads. Used extensively in heavy plant, rail, shipyard and oil rig industries. The 12 point bi-hexagon side drive design gives a higher torque than normal sockets. Made from chrome vanadium and fully chrome plated with a mirror finish and aluminium-free. Chamfered leading edge ensures easy fastener location.




Type	Size	Overall Length	Weight each	Order Code
Metric	36mm	65	280g	-9200K
	41mm	65	330g	-9210K
	46mm	70	360g	-9220K
	50mm	75	360g	-9230K
	55mm	80	400g	-9240K
	60mm	85	420g	-9250K
	65mm	90	450g	-9260K
	70mm	100	480g	-9270K
AF	75mm	100	520g	-9280K
	80mm	110	550g	-9290K
	1½"	70	300g	-9360K
	2"	70	360g	-9400K
	2¼"	85	400g	-9420K
	2⅜"	85	400g	-9430K
	2⅝"	85	400g	-9440K
	2¾"	85	400g	-9450K



Socket Rail Trays

Steel trays that comprise of 430mm rails with clips for retaining 1/4", 3/8" and 1/2" sq. drive sockets. Trays are fitted with carry handles and hanging holes for workshop storage.

1/4" Hexagon screwdriver bit holders

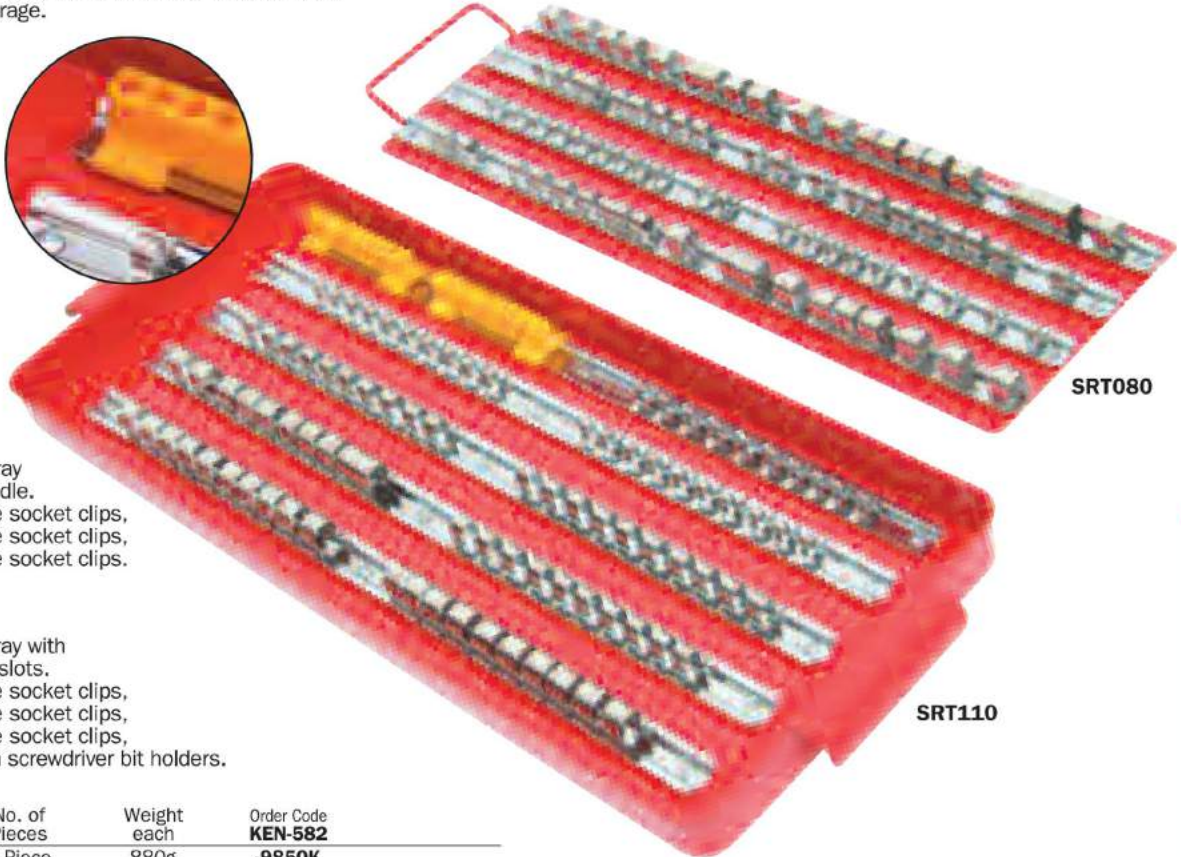

SRT080

Contents:

Powder coated tray with carrying handle.
30x 1/2" sq. drive socket clips,
30x 3/8" sq. drive socket clips,
20x 1/4" sq. drive socket clips.

SRT110

Contents:

Powder coated tray with integral hanging slots.
30x 1/2" sq. drive socket clips,
30x 3/8" sq. drive socket clips,
30x 1/4" sq. drive socket clips,
20x 1/4" hexagon screwdriver bit holders.

Product Number	No. of Pieces	Weight each	Order Code
SRT080	80 Piece	880g	-9850K
SRT110	110 Piece	1.80kg	-9860K

Socket Rails & Clips

Made from steel, bright chrome plated and can be fixed or loose in a toolbox, or fitted to a bench or wall. Can be used with any size square drive socket.



Socket Rails

Overall Length	Weight per 10	Order Code
220mm	290g	-9820K
420mm	430g	-9840K




Socket Clips

Sq. Drive Size	Weight per 100	Order Code
1/4"	60g	-9880K
3/8"	90g	-9890K
1/2"	150g	-9900K

Socket Racks

Socket rails and socket clips combined together.

Sq. Drive Size	Overall Length	No of Clips	Weight each	Order Code
1/4"	420mm	15	70g	-9920K
	220mm	8	30g	-9930K
3/8"	420mm	15	70g	-9950K
	220mm	8	30g	-9960K
1/2"	420mm	15	70g	-9980K
	220mm	8	30g	-9990K

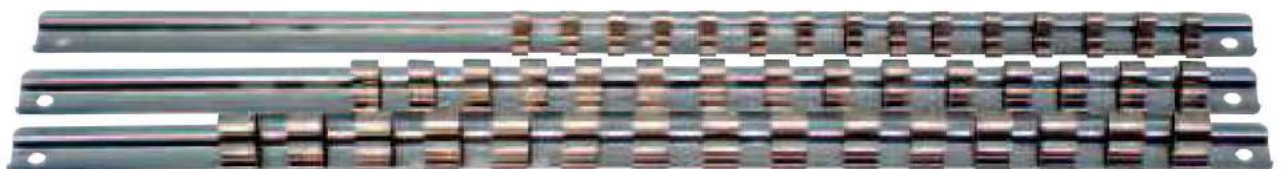

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

1/4" Drive Ideal for assembly and servicing of small precision mechanisms associated with electrical, electronic, ignition and refrigeration work.

3/8" Drive Used in the automotive and aerospace industries. The weight to strength ratio ensures the

reliability and accessibility that is so important on this type of production. Sockets have a knurl feature to give a high grip which is essential for a quick tool change when your hands are greasy/oily. The 12 point bi-hexagon side drive design will give a higher torque than normal sockets, grip worn nuts and will not round off existing nuts. Manufactured from chrome vanadium and are fully chrome plated with a mirror finish and aluminium-free. Chamfered leading edge ensures easy fastener location. Sockets manufactured to: **ANSI B107.5M: 1987, ANSI B107.1: 1978 & BS 4006 : 1992.**

Accessories manufactured to: **ANSI B107.10M : 1982 & BS 4006 : 1992.**

Metric Socket Set

Sockets: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22mm.

Deep Sockets: 10, 11, 12, 13, 14, 15, 17, 19, 22mm.

Spark Plug Sockets:

M10 and M14.

Screwdriver bits:

Slotted: 5 & 6mm.

Crosspoint: No.1, No.2, No.3, No.4.

Accessories:

Sliding T-handle, ratchet handle, swivel handle, 1/4" spinner handle, universal joint, 1/4" hex bit adaptor.

**40
PIECES**

new

Weight each	Order Code
3.3kg	SEN-582
	-9140K



Sets Now Available
See Page 526



KENGRIP
Patented Design

SA40MA 40 Piece - Metric & Inch

3/8" Drive Bi-Hex Sockets: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19 and 21mm. 1/4", 5/16", 3/8", 1/2", 9/16", 5/8", 7/16", 11/16" and 3/4" AF.


Deep Sockets: 10, 11, 12, 13 & 14mm. 9/16", 5/8", 11/16" and 3/4" AF.

Spark Plug Sockets: M10 (16mm) and M14 (21mm).

Accessories:

Ratchet handle, sliding T-handle, swivel handle, universal joint. 75mm and 150mm extension bars.

**40
PIECES**

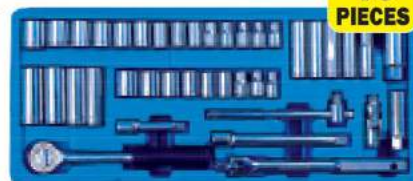

Weight each	Order Code
3.90kg	SEN-582
	-0100K

SDA100MAB - 100 Piece Metric, Inch & BA

1/4" Drive Bi-Hex Sockets: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13mm. 3/16", 7/32", 1/4", 9/32", 5/16", 11/32", 3/8", 7/16", 1/2" AF. 0, 2, 4, 6, 8 and 10BA.

Screwdriver Bits:

Slotted 3.5, 4.5, 5.5, 6mm.

Crosspoint No.1, No.2, No.3.

PZ No.1, No.2, No.3.

TX T15, T20, T25.

Hex 3, 4, 5, 6, 8, 10mm, 1/8", 5/32", 3/16", 7/32", 1/4", 5/16", 3/8" AF.

Accessories: 50, 75 and 150mm extension bars, ratchet handle, sliding T-handle, spinner handle, universal joint.

3/8" Drive Bi-Hex Sockets: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19 and 21mm. 1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16" and 3/4" AF.

Deep Sockets:

10, 11, 12, 13 and 14mm.

9/16", 5/8", 11/16" and 3/4" AF.

Spark Plug Sockets:

M10 (16mm) and M14 (21mm).

Accessories: 75 and 150mm extension bars, flexible handle, ratchet handle, universal joint, sliding T-handle

**100
PIECES**



Weight each	Order Code
5.00kg	SEN-582
	-0080K

Metric Socket & Spanner Set

Sockets: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13mm

Deep Sockets: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10mm.

E-Sockets: 4, 6 and 8mm.

Converters: 1/4" hex bit adaptor, 1/4" sq. female x 3/8" dr. male converter.

Hex Bits: Slotted: 4, 5.5, 7mm. **Crosspoint:** No.1, No.2, No.3, No.4.

Hex: 3, 4, 5, 6, 8mm. 1/8", 5/32", 3/16", 7/32", 1/4", 5/16" AF.

Accessories: 50, 75, 150mm extension bars, universal joint, sliding T-bar, spinner handle, ratchet handle.

Sockets: 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32mm.

Deep Sockets: 16, 17, 18, 19, 21, 22mm.

E-Sockets: 16, 18 and 20mm.

Spark Plug Sockets: 16 and 21mm.

Converters: 1/2" sq. female x 3/8" sq. male converter, 1/2" sq. female x 1/4" hex bit adapter.

Accessories: 75, 125, 250mm extensions bars, universal joint, sliding T-bar, ratchet handle.

Bits: TX: T6, T7, T8, T9, T10, T15, T20, T25, T27, T30, T40.

PZ: No.1, No.2, No.3, No.4.

Magnetic Bit: 1/4" Hex Driver, adjustable spanner.

Combination Spanners: 8 - 19mm

9 Hex Key Wrenches: 1.5 - 10mm.

Weight each	Order Code
9.24kg	SEN-582
	-9500K

**120
PIECES**


new



1/4" Square Drive 19 Piece Metric Set

Metric Ken-Grip® Sockets: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm.

Accessories: ratchet handle, spinner handle, sliding T-handle, flexi-drive 145mm, universal joint, extension bar 100mm.

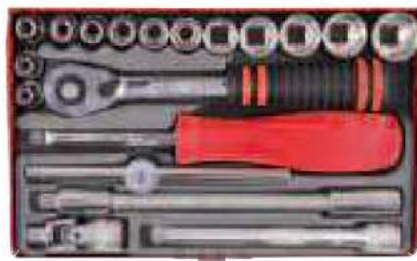

Weight each
880g

Order Code
KEN-582
-8800K

19
PIECES



RSD43 - 43 Piece Metric & Inch

High quality chrome vanadium for garage, workshop and home maintenance.

Sockets: 6, 7, 8, 9, 10, 11, 12mm. 3/16", 1/4", 5/16", 11/32", 3/8", 7/16" and 1/2" AF.

Long Series (50mm) Bits: Slotted 4, 5, 6mm. **Crosspoint** No.1, No.2, No.3. **TX** T10, T15, T20, T25, T27, T30, T40, T45.

Short Series (25mm) Bits: **PZ** No.1, No.2. **Hex** 1.5, 2, 2.5, 3, 4, 5, 5.5 and 6mm.

Accessories: ratchet spinner handle, 150mm flexible extension bar, 100mm hex bit extension bar, 1/4" coupler, 50mm socket coupler.

43
PIECES



Weight each
1.10kg

Order Code
SEN-582
-0040K

SD60MAB - 60 Piece Metric, Inch & BA

Sockets: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12 and 13mm. 3/16", 7/32", 1/4", 9/32", 5/16", 11/32", 3/8", 7/16" and 1/2" AF. 0, 2, 4, 6, 8 and 10BA.

Screwdriver Bits: Slotted 3.5, 4.5, 5.5, 6mm.

Crosspoint No.1, No.2 No.3. **PZ** No.1, No.2, No.3.

TX T15, T20 and T25. **Hex** 3, 4, 5, 6, 8 and 10mm. 1/8", 5/32", 3/16", 7/32", 1/4", 5/16", 3/8" AF.

Accessories: ratchet handle, sliding T-handle, spinner handle, universal joint. 50, 75 and 150mm extension bars,

60
PIECES



Weight each
1.50kg

Order Code
SEN-582
-0060K

SOCKET SETS - 1/4" SQUARE DRIVE

GROUP 582



Metric & Inch Socket Sets

-9020K (Not Shown)

Sockets: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14. 3/16", 7/32", 1/4", 9/32", 5/16", 11/32", 3/8", 7/16" and 1/2" AF.

Screwdriver Bits: **Slotted:** 4, 5.5, 7mm. **Crosspoint:** No.1, No.2, No.3. **Hex:** 3, 4, 5, 6, 8mm.

Accessories: Sliding T-handle, ratchet handle, spinner handle, 50, 75 and 150mm extension bars, universal joint, hex bit adaptor.

Metric Socket Sets

-9040K

Sockets: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm.

Deep Sockets: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm.

Screwdriver Bits: **Slotted:** 4, 5.5, 7mm. **PZ:** No.1, No.2, No.3. **Crosspoint:** No.1, No.2, No.3.

Hex: 2, 2.5, 3, 4, 5, 6mm.

TX: T6, T8, T10, T15, T20, T25, T30, T40.

Accessories: Sliding T-handle, ratchet handle, 50, 75 and 150mm extension bars, 50 and 150mm wobble extension, 150mm jointed swivel handle, spinner handle, universal joint, hex bit adaptor.



60 Pieces

Number of Pieces	Weight each	Order Code
41	1.25kg	-9020K
60	1.83kg	-9040K



1/4" Drive Manufactured from chrome vanadium and are fully chrome plated with a mirror finish and aluminium-free.

Chamfered leading edge ensures easy fastener location.

Sockets made to: **ANSI B107.5M : 1987, ANSI B107.1 : 1978 & BS 4006 : 1992.**

Accessories made to: **ANSI B107.10M : 1982 & BS 4006 : 1992.**

TS19M - 19 Piece Metric Socket Set

Metric Hex Sockets: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm.

TS29MA - 29 Piece Metric & Inch Socket Set

Metric Sockets: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm. **AF Sockets:** 3/16", 7/32", 1/4", 9/32", 5/16", 11/32", 3/8", 7/16", 1/2", 9/16".

Accessories for TS19M & TS29MA: ratchet handle, spinner handle, sliding T-handle, flexi-drive 145mm, universal joint, extension bar 100mm.

TS19M



Number of Pieces	Weight each	Order Code
19	880g	-4893K
29	1.2kg	-4895K

51 Piece Metric/AF

TSD51MA

Standard & Deep Sockets

Standard Sockets (Metric): 4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm.

Deep Sockets (Metric): 6, 7, 8, 9, 10, 11, 12, 13, 14mm.

Standard Sockets (AF): 3/16", 7/32", 1/4", 9/32", 5/16", 11/32", 3/8", 7/16", 1/2", 9/16".

Deep Sockets (AF): 3/16", 7/32", 1/4", 9/32", 5/16", 11/32", 3/8", 7/16", 1/2", 9/16".

Accessories: ratchet handle (rubber grip), 100mm sliding T-handle, 100 and 250mm extension bars, 50 and 150mm wobble extensions, universal joint, spinner handle, 150mm flexible extension, swivel handle rubber grip.



Weight each
3.2kg

Order Code
KEN-582
-4902K

51
PIECES

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

545

**KENNEDY
PROFESSIONAL**

1/4" Drive Ideal for assembly and servicing of small precision mechanisms associated with electrical, electronic, ignition and refrigeration work. Sockets have a knurl feature to give a high grip which is essential for a quick tool change when your hands are greasy/oily. The 12 point bi-hexagon side drive design will give a higher torque than normal sockets, grip worn nuts and will not round off existing nuts. Manufactured from chrome vanadium and are fully chrome plated with a mirror finish and aluminium-free. Chamfered leading edge ensures easy fastener location.

Sockets manufactured to: **ANSI B107.5M: 1987, ANSI B107.1: 1978 & BS 4006 : 1992.**

Accessories manufactured to: **ANSI B107.10M : 1982 & BS 4006 : 1992.**

TSD46M - 46 Piece Metric Set

 **Standard & Deep Sockets with Screwdriver Bits**

**46
PIECES**

Sockets: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm.

Deep Sockets: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm.

Screwdriver Bits: Slotted 4, 5.5, 7mm.

Crosspoint No.1, No.2, No.3. **Hex** 3, 4, 5, 6, 8mm.

Accessories: sliding T-handle, ratchet handle, extension bar 50 and 150mm, wobble extension 100 and 250mm, universal joint, jointed swivel handle 150mm, spinner handle.




Weight
each

3.20kg

Order Code
KEN-582

-4897K

TS46MA - 46 Piece Metric & Inch

 **Standard Sockets with Screwdriver Bits**

**46
PIECES**

Sockets: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm.

AF Sockets: 3/16", 7/32", 1/4", 5/16", 11/32", 3/8", 7/16", 1/2".

Screwdriver Bits: Slotted 4, 5.5mm. **Crosspoint** No.2, No.3.

Hex 3, 4, 5, 6, 8mm. **Hex** 1/8", 5/32", 3/16", 7/32", 1/4", 5/16" AF.

Accessories: sliding T-handle, ratchet handle, wobble extension 50 and 150mm, extension bars 100 and 250mm, universal joint, jointed swivel handle 150mm, flexible extension 150mm, spinner handle.



Weight
each

3.00kg

Order Code
KEN-582

-4898K

TSD82MA - 82 Piece Metric & Inch

 **Standard & Deep Sockets with Screwdriver Bits**

Sockets: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm.
3/16", 7/32", 1/4", 5/16", 11/32", 3/8", 7/16", 1/2" AF.

0, 1, 2, 3, 4, 5, 6BA.

Deep Sockets: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm.

Screwdriver Bits: Slotted 4, 5.5, 7mm. **Crosspoint** No.1, No.2, No.3, No.4. **Hex** 3, 4, 5, 6, 8mm. 1/8", 5/32", 3/16", 7/32", 1/4", 5/16" AF. **TZ** T6, T7, T8, T9, T10, T15, T20, T25, T27, T30, T40.

Accessories: sliding T-handle, ratchet handle, 100, 150 and 250mm extension bars, 50 and 150mm wobble extension, 150mm flexible extension, square male adaptor 3/8", 150mm jointed swivel handle, spinner handle, universal joint.

**82
PIECES**


Weight
each

3.80kg

Order Code
KEN-582

-4896K


MT50M - 50 Piece Metric

 **Standard Sockets:**

4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13mm.

**50
PIECES**

Accessories: ratchet handle, sliding T-handle, 50, 150 and 250mm extension bars, 100mm wobble extension, 150mm flexible extension, universal joint, 150mm jointed swivel handle, spinner handle.

 **Sockets:** 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32, 36mm.

Accessories: quick release ratchet handle, universal joint, sliding T-handle, 375mm swivel handle, 75 and 250mm extension bars, 150mm wobble extensions.



Weight
each

8.10kg

Order Code
KEN-582

-4899K



3/8" Drive Used in the automotive and aerospace industries. The weight to strength ratio ensures the reliability and accessibility that is so important on this type of production. All Kennedy professional sockets have a double knurl feature to give a high grip which is essential for a quick tool change when your hands are greasy/oily. The 12point bi-hexagon side drive design will give a higher torque than normal sockets, grip worn nuts and will not round off existing nuts. Manufactured from chrome vanadium and are fully chrome plated with a mirror finish and aluminium-free. Chamfered leading edge ensures easy fastener location. Sockets manufactured to: **ANSI B107.5M: 1987, ANSI B107.1: 1978 & BS 4006 : 1992.** Accessories manufactured to: **ANSI B107.10M : 1982 & BS 4006 : 1992.**


S30M - 30 Piece Metric with Screwdriver Bits

Sockets: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21 and 22mm.

Spark Plug Sockets: M10 and M14.

Screwdriver Bits: Slotted 5mm, 6mm. **Crosspoint** No.1, 2, 3, 4.

Accessories: ratchet handle, sliding T-handle, swivel handle, universal joint, 75mm extension bar, 150mm wobble extension, parts tray with magnetic insert. Robust fitted case with security padlock hole and cushion grip handle.

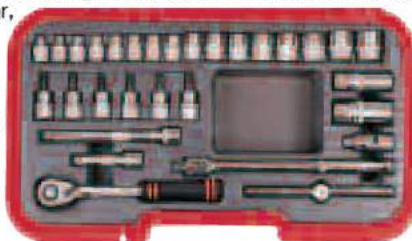

**30
PIECES**

Weight each	Order Code KEN-582
3.50kg	-6170K

Accessories	Order Code KEN-567
Locking Clasps (Pair)	-6000K

SD25MA - 25 Piece Metric & Inch

Bi-Hex Sockets Deep Sockets: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22mm. 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4" and 13/16" AF.

Accessories: swivel handle, sliding T-bar, 125mm extension.

Parts tray with magnetic insert. Robust fitted case with security padlock hole and cushion grip handle.



**25
PIECES**

Weight each	Order Code KEN-582
5.50kg	-6190K

Accessories	Order Code KEN-567
Locking Clasps (Pair)	-6000K

3/8" Square Drive 50 Piece Metric Set

Ken-Grip® Standard & Deep Sockets
Standard: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21 and 22mm.
Deep: 10, 11, 12, 13, 14, 15, 17, 19 and 22mm.

Screwdriver Bits: Slotted 5, 5.5 and 6.5mm.

Crosspoint No.1, 2, 3, 4.

Hexagon Sockets: 3, 4, 5, 6, 8, 10mm.

Accessories: ratchet handle, sliding T-handle, spinner handle, swivel handle, universal joint, 125 and 250mm extensions, 250mm wobble extensions, 1/4" and 1/2" male adaptors, 1/4" socket bit coupler. Robust fitted case with security padlock hole and cushion grip handle.



**50
PIECES**

Weight each	Order Code KEN-582
3.00kg	-8810K



KENGRIP
Patented Design

S40MA - 40 Piece Metric & Inch

Metric & Inch Sockets: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22mm. 1/4", 5/16", 11/32", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16" and 7/8" AF.

Spark Plug Sockets: M10 and M14.

Accessories: ratchet handle, sliding T-handle, universal joint, 75 and 150mm extension bars, 150mm wobble extension, 1/4" and 1/2" male adaptors, 1/4" hexagon coupler. Robust fitted case with security padlock hole and cushion grip handle.



**40
PIECES**

Weight each	Order Code KEN-582
3.60kg	-6175K

Accessories	Order Code KEN-567
Locking Clasps (Pair)	-6000K

SSD50M - 50 Piece Metric with Screwdriver Bits

Standard & Deep Sockets
Standard: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21 and 22mm.

Deep: 10, 11, 12, 13, 14, 15, 17, 19 and 22mm.

Screwdriver Bits: Slotted 5, 5.5 and 6.5mm.

Crosspoint No.1, 2, 3, 4. **Hex** 3, 4, 5, 6, 8 and 10mm.

Accessories: ratchet handle, sliding T-handle, spinner handle, swivel handle, universal joint, 125 and 250mm extensions, 250mm wobble extensions, 1/4" and 1/2" male adaptors, 1/4" hex bit coupler. Robust fitted case with security padlock hole and cushion grip handle.



**50
PIECES**

Weight each	Order Code KEN-582
4.75kg	-6180K

Accessories	Order Code KEN-567
Locking Clasps (Pair)	-6000K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

**Sockets:** 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22mm.

1/4", 5/16", 11/32", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16" and 7/8" AF. 1/8", 3/16", 1/4", 5/16", 3/8", 7/16" and 1/2" Whit.

Screwdriver Bits:**Slotted** 3/16", 7/32" and 1/4". **Crosspoint** No.1, 2, 3, 4. **PZ** No.1, No.2, No.3. **TX** T6, T7, T8, T9, T10, T15, T20, T25, T27, T30, T40, T45, T50. **Hex** 3, 4, 5, 6, 8, 10mm. 1/8", 5/32", 3/16", 7/32", 1/4", 5/16" and 3/8" AF.**Spark Plug Sockets:** M10 and M14.**Accessories:** ratchet handle, sliding T-handle, spinner handle, swivel handle, universal joint. 75, 125, 150, 250, 300 and 450mm extensions, 150 and 250mm wobble extensions, 1/4" and 1/2" male adaptors, 1/4" hexagon coupler. Robust fitted case with security padlock hole and cushion grip handle.**90
PIECES**

Weight each	Order Code
8.70kg	KEN-582
	-6185K

Accessories	Order Code
Locking Clasps (pr)	KEN-567
	-6000K

3/8" Square Drive Manufactured from industrial quality chrome vanadium steel with high polished corrosion resistant finish. The high strength to weight ratio ensures the reliability and accessibility that is necessary for use in the automotive, assembly, service and maintenance industries. The bi-hexagonal design allows a higher torque to be applied and will not round off existing nuts.

Sockets manufactured to: **ANSI B107.5M:1987**. Accessories manufactured to: **ANSI B107.10M:1982**.**55 Piece Metric Standard & Deep Socket Set with Screwdriver Bits****3/8" Drive Bi-Hex Sockets Standard & Deep Sockets:****Sockets:** 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, and 22mm.**Deep Sockets:** 10, 11, 12, 13, 14, 15, 17, 19 and 22mm.**Spark Plug Sockets:** M10 and M14.**Screwdriver Bits:****Phillips** No.1, 2, 3.**Slotted** 5, 6mm.**TX** T10, T15, T20, T30, T40, T50.**Hex** 3, 4, 5, 6, 8, 10mm. Hex bit coupler.**Accessories:** Lever type ratchet, sliding T-handle, swivel handle, spinner handle, universal joint, 150 and 300mm extension bars, 250mm wobble extension. Fitted case with cushioned handle, snap shut clasp and padlock hole.**55
PIECES**

Weight each	Order Code
6.00kg	YMT-582
	-6180K

55 Piece Metric & Inch**3/8" Drive Bi-Hex Sockets Standard & Deep Sockets****Sockets:** 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21 and 22mm.

1/4", 5/16", 11/32", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", and 7/8" AF.

Deep Sockets: 10, 11, 12, 13, 14, 15, 17, 19, 22mm. 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4" and 13/16" AF.**Spark Plug Sockets:** M10 and M14.**Accessories:** lever type ratchet, sliding T-handle, universal joint, 150 and 300mm extension bars, 250mm wobble extension, 1/4" hex bit coupler. Fitted case with cushioned handle, snap shut clasp and padlock hole.**55
PIECES**

Weight each	Order Code
5.70kg	YMT-582
	-6200K



3/8" Square Drive Manufactured from industrial quality chrome vanadium steel with high polished corrosion resistant finish. The high strength to weight ratio ensures the reliability and accessibility that is necessary for use in the automotive, assembly, service and maintenance industries. The bi-hexagonal design allows a higher torque to be applied and will not round off existing nuts. Sockets manufactured to: **ANSI B107.5M:1987**. Accessories manufactured to: **ANSI B107.10M:1982**.

Metric Socket Set



Sockets: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22mm.
Deep Sockets: 10, 11, 12, 13, 14, 15, 17, 19, 22mm.

Spark Plug Sockets: M10 and M14.

Screwdriver Socket Bits: Phillips: No.1, 2, 3.

Slotted: 5, 6mm. **TX:** T10, T15, T20, T30, T40, T50.

Hex: 3, 4, 5, 6, 8, 10mm.

3/8" dr. sq. female x 1/4" hex bit adaptor.

Accessories: lever type quick release ratchet, sliding T-handle, swivel handle, 200mm spinner handle, universal joint, 75mm and 150mm extension bars, 250mm wobble extension.

Sockets manufactured to:

ANSI B107.5M:2012.

Accessories manufactured to:

ANSI B107.10M:2005.

new



**54
PIECES**

HAND TOOLS

Weight
each

5kg

Order Code
YMT-582

-9240K

Metric & Inch Socket Set



Sockets: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22mm.
1/4", 5/16", 11/32", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8" AF.

Deep Sockets: 10, 11, 12, 13, 14, 15, 17, 19, 22mm.
3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16" AF.

Spark Plug Sockets: M10 and M14.

Accessories: lever type quick release ratchet, sliding T-handle, universal joint, 75mm and 150mm extension bars, 250mm wobble extension, 3/8" dr. sq. female x 1/4" hex bit coupler.

Sockets manufactured to:

ANSI B107.5M:2012.

Accessories manufactured to:

ANSI B107.10M:2005.

new



**55
PIECES**

Weight
each

4.8kg

Order Code
YMT-582

-9260K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

© 2018

549

GROUP

582 SOCKETS SETS - 1/2" SQUARE DRIVE**SENATOR**
QUALITY TOOLING**Metric, Inch & Whitworth Set**

Sockets: Metric 10, 11, 12, 13, 14, 15, 17, 19, 20, 21, 22, 24 and 27. 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1 1/16", 1 1/4" AF.

Sockets: 1/8", 3/16", 1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 5/8" BSW.

Accessories: 100mm and 200mm extension bars, ratchet handle and sliding T-handle.

**41
PIECES****new**

Weight
each
5.86kg

Order Code
SEN-582
-9240K

Metric Set

Sockets: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32mm.
Deep sockets: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24mm.

Spark Plug Sockets: 16 and 21mm.

Accessories: Sliding T-handle, ratchet handle, 75, 125, 250mm extension bars, universal joint.

new**37
PIECES**

Weight
each
6.03kg

Order Code
SEN-582
-9260K

Metric Set

Sockets: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32mm.

Accessories: sliding T-handle, ratchet handle, universal joint, 125 and 250mm extension bars.

**23
PIECES****new**

Weight
each
4.3kg

Order Code
SEN-582
-9220K

Combined Socket & Wrench Tool Kit

The Senator 208 Piece Combined Socket and Wrench Tool Kit comes with a plastic storage case. **Contents:** 1/2" drive sockets: 13 - 32mm. Drive deep sockets: 16 to 22mm. **E-Sockets:** 20, 22, 24mm. **Screwdriver bits:** Hex 14mm, TX 70. **Converters:** 1/2" sq. female x 3/8" sq. female. **Accessories:** 125, 250mm extensions bars, 1/2" drive universal joint, T-bar, quick release offset bi-material ratchet handle. 3/8" drive sockets: 10 - 19mm. **Deep sockets:** 10 - 15mm. **Spark plug sockets:** 16, 18, 21mm. **E-Sockets:** 10 - 18mm. **Screwdriver bits:** Slotted 6 - 12. PZ No. 1, 2, 3. Crosspoint No.1, 2, 3, 4. Hex 6 - 12mm. TX 40 - 60. Tamper proof TX 40 - 60. Spline 5, 6, 8. **Converters:** 3/8" sq. female x 5/16" hex drive, 3/8" sq. female x 1/4" sq. male. **Accessories:** 75mm extension bar, universal joint, quick release offset bi-material ratchet handle. 1/4" drive sockets: 4 - 14mm. **Deep sockets:** 4 - 10mm. **E-Sockets:** 4 - 8mm. **Screwdriver bits:** Slotted 4 - 7mm. PZ No.0, 1, 2. Crosspoint No.0, 1, 2, TX 8 - 30. Tamper-proof TX 8 - 30. Hex 3 - 6mm. **Converters:** 1/4" sq. female x 1/4" hex drive. **Accessories:** 50, 100mm extension bars, universal joint, T-bar, nut spinner handle, quick release offset bi-material ratchet handle. **Combination spanners:** 8 - 19mm.

Hex key wrenches: 1.5, 2.0, 2.5mm. **Magnetic bit:** 1/4" hex driver.

Screwdriver bits: 1/4" hex driver. **Converter:** 2x 1/4" sq. male, **Slotted** 2x 3.5, 4mm 1x 5.5, 6.5, 8mm, **PZ** No.1, 2, 3, **Crosspoint** 2x No.0, 1, 2, 3, TX 10, 15, 20, 25, 27, 30, 40, **Tri-Wing** No.1, 2, 3, 4, **Square** 1, 2, 3, hex 2, 3, 4, 5, 6, 7mm.

**208
PIECES**

Weight
each
10.7kg

Order Code
SEN-582
-9000K

550

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

© 2018



1/2" Square Drive Manufactured from industrial quality chrome vanadium steel with corrosion resistant high polish mirror finish, aluminium-free. The 12 point bi-hexagonal side drive sockets allow higher torques to be applied to nuts without damage and grip worn nuts. The strength and robust design of 1/2" drive make them suitable for the heavy use encountered in agriculture, service and maintenance industries.

Sockets manufactured to: **ANSI B107.5M:1987**. Accessories manufactured to: **ANSI B107.10M:1982**.

30 Piece Metric

Sockets: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 30 and 32mm.

Spark Plug Sockets: M14 and M10.

Accessories: quick release flick lever ratchet with rubber grip, T-handle uni-joint, 75, 125 and 250mm extension bars, robust fitted case with padlock hole and cushion grip handle.

**30
PIECES**


Weight
each
6.00kg

Order Code
YMT-582
-7992K

SENATOR QUALITY TOOLING 24 Piece Metric/ Metric & Inch Sets

SE24M - 24 Piece Metric

Sockets: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, and 32mm.

SE24MA - 24 Piece Metric & Inch

Sockets: 10, 11, 12, 13, 14, 16, 17, 19, 20 and 22mm. 3/8", 7/16", 1/2", 9/16", 5/8", 3/4", 7/8" and 15/16" AF.

Accessories: ratchet handle, T-handle, speed brace, universal joint, 125 and 250mm extension bars.

**24
PIECES**


Model
Number

Weight
each
4.00kg
4.00kg

Order Code
SEN-582
-0120K
-0160K

50 Piece Metric

Sockets: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 33 and 36mm.

Screwdriver Bits: Hex 4, 5, 6, 7, 8, 10, 12, 14, 17 and 19mm.

Phillips No.2, No.3, No.4.

Chrome Molybdenum Screwdriver Bits: 9 and 14mm chemically blacked.

Spark Plug Sockets: M14 and M10.

Accessories: black rubber ratchet handle, T-handle, swivel handle, universal joint, 75, 125 and 250mm extension bars. Robust fitted case with magnetic parts tray, padlock hole and cushion grip handle.

**50
PIECES**


Weight
each
10.3kg

Order Code
YMT-582
-7994K

SE42MAW - 42 Piece Metric, Inch & Whitworth

Sockets: 10, 11, 12, 13, 14, 15, 17, 19, 20, 21, 22, 24 and 27mm. 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1 1/16", 1 1/4" AF. 1/8", 3/16", 1/4", 5/16", 3/8", 7/16", 1/2", 9/16" and 5/8" BSW.

Spark Plug Socket: M14 (21mm).

Accessories: ratchet, T-handle, brace, universal joint, 125 and 250mm extension bars.

**42
PIECES**


Weight
each
6.15kg

Order Code
SEN-582
-0180K

**KENNEDY
PROFESSIONAL**

1/2" Square Drive The most popular drive size used in the service and maintenance industries. This popularity is due to the strength and robust nature of 1/2" drive. All Kennedy Professional sockets have a knurl feature to give a high grip which is essential for a quick tool change when your hands are greasy/oily.

The 12 point bi-hexagon side drive design will give a higher torque than normal sockets, grip worn nuts and will not round off existing nuts. Manufactured from chrome vanadium and are fully chrome plated with an aluminium free mirror finish. Chamfered leading edge ensures easy fastener location. Sockets manufactured to: **ANSI B107.5M : 1987, ANSI B107.1 : 1978 & BS 4006 : 1992.**
Accessories manufactured to: **ANSI B107.10M : 1982 & BS 4006 : 1992.**

M20M - 20 Piece Metric



Sockets: 10, 11, 12, 13, 14, 15, 17, 19, 22, 24, 27, 30 and 32mm.

Spark Plug Sockets: M10 and M14.

Accessories: quick release ratchet handle, sliding T-handle, universal joint, 125 and 325mm extension bars. Robust fitted case with security padlock hole and cushion grip handle.

Weight each	Order Code
4.90kg	KEN-582 -7983K

Accessories

Description	Order Code
Locking Clasps (Pair)	-6000K

**20
PIECES**


M25M - 25 Piece Metric



Sockets: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22, 24, 27, 30 and 32mm.

Spark Plug Sockets: M10 and M14.

Accessories: quick release ratchet handle, sliding T-handle, universal joint, 75, 125 and 250mm extension bars. Robust fitted case with security padlock hole and cushion grip handle.

**25
PIECES**


Accessories

Weight each	Order Code
4.90kg	KEN-582 -7985K

Description	Order Code
Locking Clasps (Pair)	-6000K

M30MSH - 30 Piece Metric - Single Hexagon



Sockets: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 30 and 32mm.

Spark Plug Sockets: M10 and M14.

Accessories: quick release ratchet handle, universal joint, sliding T-handle, 75, 125 and 250mm extension bars. Supplied in a fitted impact-resistant plastic carry case with a cushioned handle, snap-shut clasps and padlock hasp hole.

**30
PIECES**


Weight each	Order Code
5.55kg	KEN-582 -7940K

**YAMOTO
INDUSTRIAL SOCKET SETS**

1/2" Square Drive Manufactured from industrial quality chrome vanadium steel with corrosion resistant high polish mirror finish, aluminium-free. The 12 point bi-hexagonal side drive sockets allow higher torques to be applied to nuts without damage and grip worn nuts. The strength and robust design of 1/2" drive make them suitable for the heavy use encountered in agriculture, service and maintenance industries.

Sockets manufactured to: **ANSI B107.5M:1987.**

Accessories manufactured to: **ANSI B107.10M:1982.**

Metric, Inch & Whitworth Set



Sockets: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32mm.

5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1 1/16", 1 1/8", 1 1/4" AF.

3/16", 1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 5/8" Whit.

Spark Plug Sockets: M14 and M10.

Accessories: quick release lever ratchet, sliding T-handle, swivel handle with rubber grip, universal joint, extension bars 125 and 250mm.

Sockets manufactured to: **ANSI B107.5M:2012.**

Accessories manufactured to: **ANSI B107.10M:2005.**

Weight each	Order Code
7.1kg	YMT-582 -9320K

new

**50
PIECES**

**KENNEDY
PROFESSIONAL**

1/2" Square Drive The most popular drive size used in the service and maintenance industries. This popularity is due to the strength and robust nature of 1/2" drive. All Kennedy Professional sockets have a knurl feature to give a high grip which is essential for a quick tool change when your hands are greasy/oily.




The 12 point bi-hexagon side drive design will give a higher torque than normal sockets, grip worn nuts and will not round off existing nuts. Manufactured from chrome vanadium and are fully chrome plated with a mirror finish and aluminium-free. Chamfered leading edge ensures easy fastener location. Sockets manufactured to: **ANSI B107.5M : 1987, ANSI B107.1 : 1978 & BS 4006 : 1992.**

Accessories manufactured to: **ANSI B107.10M : 1982 & BS 4006 : 1992.**

M30M - 30 Piece Metric

Sockets: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 30 and 32mm.
Spark Plug Sockets: M10 and M14.

Accessories: quick release ratchet handle, sliding T-handle, universal joint, 75, 125 and 250mm extension bars. Robust fitted case with security padlock hole and cushion grip handle.

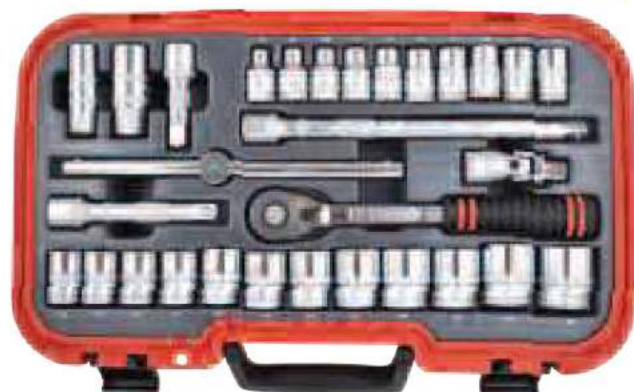**30
PIECES**


Weight
each

5.50kg

Order Code
KEN-582

-7991K

Accessories

Order Code
KEN-567

Locking Clasps (Pr)

-6000K

MD30MA - 30 Piece Deep Metric & Inch

Sockets: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 26, 27, 30 and 32mm.
1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1 1/8" and 1 1/4" AF.

Accessories: offset handle, swivel handle. Parts tray with magnetic insert. Robust fitted case with security padlock hole and cushion grip handle.

**30
PIECES**


Weight
each

12.2kg

Order Code
KEN-582

-7997K

Accessories

Order Code
KEN-567

Locking Clasps (Pr)

-6000K

SOCKET SETS - 1/2" SQUARE DRIVE

M30MA - 30 Piece Metric & Inch

Sockets: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22 and 24mm.
3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4" and 7/8" AF.

Spark Plug Sockets: M10 and M14.

Accessories: quick release ratchet handle, sliding T-handle, universal joint, 75, 125 and 250mm extension bars. Robust fitted case with security padlock hole and cushion grip handle.

**30
PIECES**


Weight
each

5.30kg

Order Code
KEN-582

-7987K

Accessories

Order Code
KEN-567

Locking Clasps (Pr)

-6000K

1/2" Square Drive 30 Piece Metric Set


Ken-Grip®: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 30 and 32mm.

Spark Plug Sockets: M10 and M14.

Accessories: quick release ratchet handle, sliding T-handle, universal joint, 75, 125 and 250mm extension bars. Robust fitted case with security padlock hole and cushion grip handle.

**30
PIECES**


KENGRIP
Patented Design

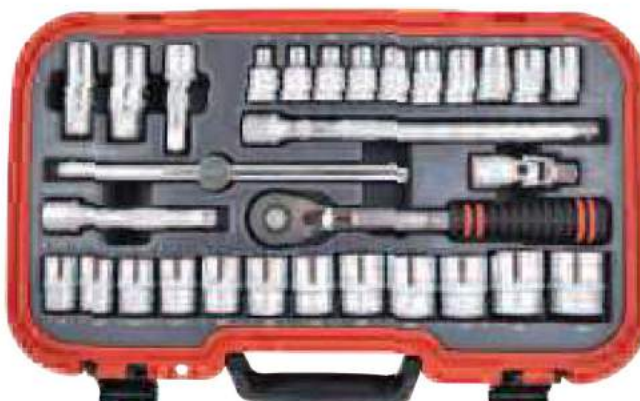

Weight
each

5.50kg

Order Code
KEN-582

-8820K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

GROUP
582

SOCKET SETS - 1/2" SQUARE DRIVE



**KENNEDY
PROFESSIONAL**

MS50M - 50 Piece Metric with Driver Bits




Sockets: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 33 and 36mm.
Screwdriver Bits: Crosspoint No.2, No.3, No.4. **Hex** 4, 5, 6, 7, 8, 10, 12, 14, 17 and 19mm. **Screwdriver Bits:** 9 and 14mm
Spark Plug Sockets: M10 and M14.

Accessories: Quick release ratchet handle, sliding T-handle, swivel handle, universal joint 75, 125 and 250mm extension bars. Parts tray with magnetic insert. Robust fitted case with security padlock hole and cushion grip handle.

**50
PIECES**

Weight each	Order Code
9.85kg	KEN-582
	-7993K
Accessories	Order Code
	KEN-567
Locking Clasps (Pr)	-6000K

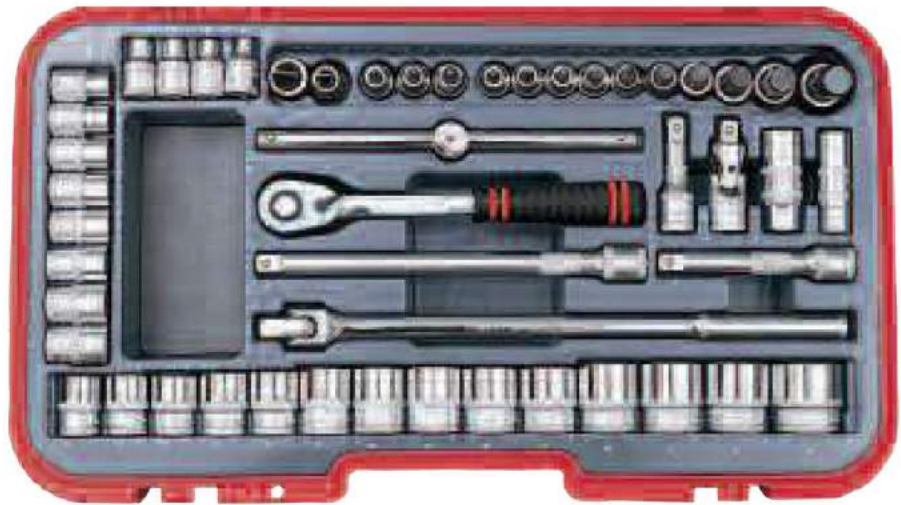

M70MAW - 70 Piece Metric, Inch & Whitworth



Sockets: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 33 and 36mm.
5/16", 3/8", 7/16", 1/2", 9/16", 19/32", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1 1/16", 1 1/8", 1 3/16" and 1 1/4" AF. 1/8", 3/16", 1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16" and 3/4" Whit.

Hex Bit Adaptors: 1/4" and 5/16".


Spark Plug Sockets: M10 and M14.

Convertors: 1/2" sq. female x 3/4" sq. male, 1/2" sq. female x 3/8" sq. male.

Accessories: quick release ratchet handle, sliding T-handle, swivel handle, universal joint, 75, 125, 250, and 450mm extension bars, 125 and 250mm wobble extensions. Robust fitted case with security padlock hole and cushion grip handle.

**70
PIECES**

Weight each	Order Code
12.2kg	KEN-582
	-7995K
Accessories	Order Code
	KEN-567
Locking Clasps (Pr)	-6000K

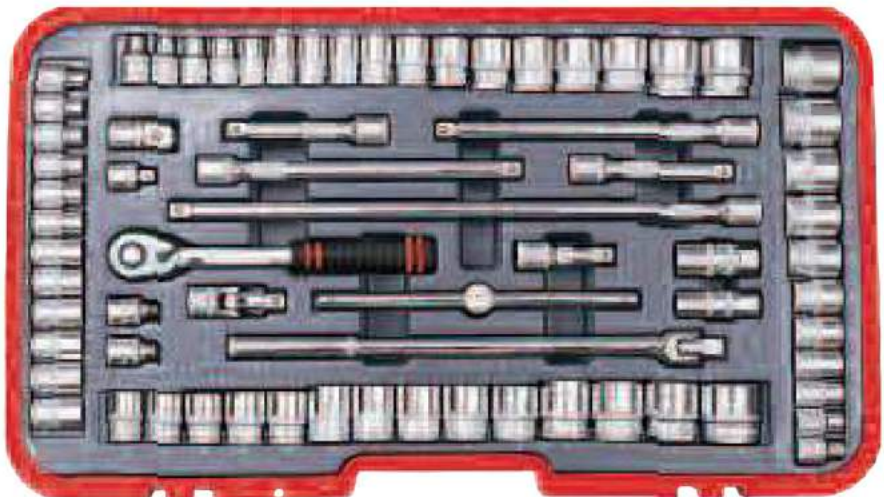

HAND TOOLS

**YAMOTO
INDUSTRIAL SOCKET SETS**

1/2" Square Drive Manufactured from industrial quality chrome vanadium steel with corrosion resistant high polish mirror finish, aluminium-free. The 12 point bi-hexagonal side drive sockets allow higher torques to be applied to nuts without damage and grip worn nuts. The strength and robust design of 1/2" drive make them suitable for the heavy use encountered in agriculture, service and maintenance industries.

Sockets manufactured to: **ANSI B107.5M:1987**. Accessories manufactured to: **ANSI B107.10M:1982**.

50 Piece Metric, Inch & Whitworth



Sockets: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30 and 32mm. **5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1 1/16", 1 1/8", 1 1/4" A/F, 3/16", 1/4", 5/16", 3/8", 7/16", 1/2", 9/16" and 5/8" Whit.**

Spark Plug Sockets: M14 and M10.

Accessories: quick release flick lever ratchet with rubber grip, T-handle, swivel handle with rubber grip, universal joint, extension bars 125 and 250mm. Robust fitted case with magnetic parts tray, padlock hole and cushion grip handle.

**50
PIECES**

Weight each	Order Code
9.40kg	YMT-582
	-7996K



554

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

© 2018



SENATOR
QUALITY TOOLING

Metric & Inch Set



Sockets: 22, 24, 27, 30, 32, 36, 38, 41, 46, 50mm.
7/8", 5/16", 1", 1 1/8", 1 3/16", 1 5/16", 1 3/8", 1 7/16", 1 5/8",
1 3/4", 1 7/8", 2".

Accessories: 100mm and 200mm extension bars,
ratchet handle and sliding T-handle.

new

Weight each
16.24kg
Order Code
SEN-582
-9320K

26
PIECES



SENATOR
QUALITY TOOLING

SH 26MA - 26 Piece Metric & Inch



Sockets: 22, 24, 27, 30, 32, 36, 38, 41, 46 and 50mm. 7/8", 15/16",
1", 1 1/8", 1 3/16", 1 5/16", 1 3/8", 1 7/16", 1 5/8", 1 3/4", 1 7/8" and 2" AF.

Accessories: 100 and 200mm extension bars, ratchet handle and T-handle.

Weight each
18.0kg
Order Code
SEN-582
-0200K

26
PIECES



KENNEDY
PROFESSIONAL

3/4" Drive A heavy duty range designed to cope with the demands of industrial agriculture machinery and heavy plant, static or mobile. All Kennedy Professional sockets have a knurl feature to give a high grip which is essential for a quick tool change when your hands are greasy/oily. The 12 point bi-hexagon side drive design will

give a higher torque than normal sockets, grip worn nuts and will not round off existing nuts. Manufactured from chrome vanadium and are fully chrome plated with a mirror finish and aluminium-free. Chamfered leading edge ensures easy fastener location.

Sockets manufactured to: **ANSI B107.5M: 1987, ANSI B107.1: 1978 & BS 4006: 1992.**

Accessories manufactured to: **ANSI B107.10M: 1982 & BS 4006: 1992.**



L36MA - 36 Piece Metric & Inch




Bi-Hexagon Sockets:

22, 24, 27, 29, 30, 32, 33, 36, 38, 41, 46, and 50mm.
7/8", 15/16", 1", 1 1/16", 1 1/8", 1 3/16", 1 1/4", 1 5/16", 1 3/8", 1 7/16",
1 1/2", 1 5/8", 1 11/16", 1 3/4", 1 13/16", 1 7/8"
and 2" AF.

Accessories: ratcheting head with 550mm universal handle, sliding T-handle, 1" to 3/4" converter, 200 and 400mm extension bars.

36
PIECES

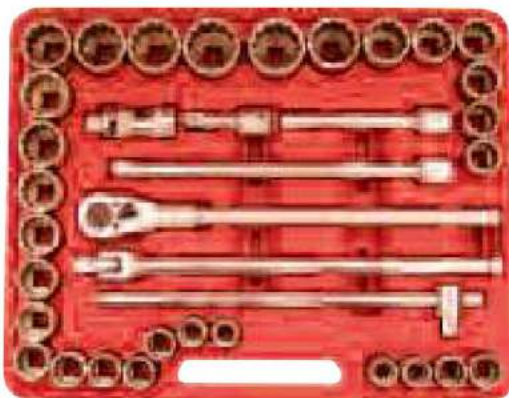

Weight each
29.3kg
Order Code
KEN-582
-8740K

L22M - 22 Piece Metric



Bi-Hexagon Sockets:

22, 24, 26, 27, 29, 30, 32, 33, 36, 38, 41, 46, 50, 55 and 60mm.

Accessories: lever type ratchet, sliding T-handle, swivel handle, universal joint, 100, 200 and 410mm extension bars. Robust fitted case with security padlock hole and cushion grip handle.

22
PIECES



Weight each
23.8kg
Order Code
KEN-582
-8720K

15 Piece Metric Socket Set



Sockets:

36, 41, 46, 50, 55, 60, 65, 70, 75 and 80mm.

Accessories: ratchet and sliding T-handle, 550mm universal handle, 200 and 400mm extension bars.

15
PIECES

Weight each
18.0kg
Order Code
KEN-582
-9470K



PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR


555

KENNEDY
QUALITY INDUSTRIAL TOOLS

**Chrome Molybdenum
Impact Sockets & Accessories**

Manufactured from high quality chrome molybdenum steel.
Black oxidised finish with permanent laser etched markings.

1/4" Drive Metric, Standard Length, 6-Point
Conform to: DIN 3129.



Socket (mm)	Style	Dimensions (mm)				Weight each	Order Code KEN-583
		D2	D1	L2	L		
6	A	13.0	10.0	6.0	23.0	15g	-0640K
7	A	13.0	11.3	6.0	23.0	15g	-0650K
8	A	13.0	12.5	7.0	23.0	15g	-0660K
9	A	13.0	13.8	7.0	23.0	15g	-0670K
10	A	13.0	15.0	7.0	23.0	17g	-0680K
11	A	13.0	16.3	8.0	23.0	20g	-0690K
12	B	13.0	17.0	8.0	23.0	17g	-0700K
13	B	13.0	18.8	8.0	23.0	22g	-0710K
14	B	13.0	20.0	8.0	23.0	20g	-0720K

1/4" Drive Reducers & Adaptors

Male Drive x Female Drive	Weight each	Order Code KEN-583
3/8" x 1/4"	40g	-7380K
1/4" x 3/8"	40g	-7400K



3/8" Drive Metric, Standard Length, 6-Point
Conform to: DIN 3129.



Socket (mm)	Style	Dimensions (mm)				Weight each	Order Code KEN-583
		D2	D1	L2	L		
6	A	19.0	11.0	4.0	30.0	35g	-1240K
7	A	19.0	12.5	8.0	30.0	40g	-1250K
8	A	19.0	13.8	8.0	30.0	40g	-1260K
9	A	19.0	15.0	8.0	30.0	40g	-1270K
10	A	19.0	16.0	8.0	30.0	40g	-1280K
11	A	19.0	17.5	9.0	30.0	40g	-1290K
12	B	19.0	19.0	9.0	30.0	40g	-1300K
13	A	22.0	20.0	9.0	30.0	55g	-1310K
14	A	22.0	21.0	9.0	30.0	55g	-1320K
15	B	22.0	22.0	11.0	30.0	55g	-1330K
16	C	22.0	24.0	11.0	30.0	60g	-1340K
17	C	22.0	25.0	11.0	30.0	60g	-1350K
18	C	22.0	26.0	11.0	30.0	60g	-1360K
19	C	22.0	27.5	11.0	30.0	70g	-1370K
20	C	22.0	28.0	12.0	30.0	70g	-1380K
21	C	22.0	30.0	13.0	30.0	70g	-1390K
22	C	24.0	32.0	13.0	30.0	85g	-1400K

3/8" Drive Reducers & Adaptors

Male Drive x Female Drive	Weight each	Order Code KEN-583
3/8" x 1/4"	40g	-7380K
1/4" x 3/8"	40g	-7400K
1/2" x 3/8"	70g	-7410K
3/8" x 1/2"	70g	-7420K



1/4" Drive Extension Bars



Length (mm)	Weight each	Order Code KEN-583
50 (2")	24g	-7490K
100 (4")	43g	-7495K

3/8" Drive Inch Size, Standard Length, 6-Point
Conform to: SAE, USA Federal Standard GGG-W-660A.



Socket (inch)	Style	Dimensions (mm)				Weight each	Order Code KEN-583
		D2	D1	L2	L		
1/4"	A	19.0	11.0	4.0	30.0	30g	-1430K
5/16"	A	19.0	12.5	8.0	30.0	30g	-1440K
3/8"	A	19.0	14.5	8.0	30.0	35g	-1460K
7/16"	A	19.0	17.0	9.0	30.0	35g	-1470K
1/2"	B	19.0	19.0	9.0	30.0	35g	-1480K
9/16"	B	20.0	20.0	9.0	30.0	40g	-1490K
5/8"	B	24.0	24.0	11.0	30.0	70g	-1500K
11/16"	B	24.0	24.0	11.0	30.0	70g	-1510K
3/4"	B	26.0	26.0	11.0	30.0	80g	-1520K

3/8" Drive Extension Bars



Length (mm)	Weight each	Order Code KEN-583
50 (2")	24g	-7500K
100 (4")	43g	-7510K




KENNEDY
QUALITY INDUSTRIAL TOOLING

Impact Sockets

Manufactured from high quality chrome molybdenum steel.
Black oxidised finish with permanent laser etched markings.



**3/8" Drive Metric,
Deep Length, 6-Point**
Conform to: **DIN 3129.**



Style A



Style B



Style C

Socket (mm)	Style	Dimensions (mm)				Weight each	Order Code KEN-583
		D2	D1	L2	L		
7	A	19.0	12.5	12.0	65.0	75g	-1700K
8	A	19.0	13.8	12.0	65.0	80g	-1710K
10	A	19.0	16.0	12.0	65.0	80g	-1720K
11	A	19.0	17.5	25.0	65.0	80g	-1730K
12	B	19.0	19.0	25.0	65.0	90g	-1740K
13	A	22.0	20.0	25.0	65.0	120g	-1750K
14	A	22.0	21.0	25.0	65.0	120g	-1650K
15	B	22.0	22.0	25.0	65.0	120g	-1760K
16	C	22.0	24.0	25.0	65.0	140g	-1770K
17	C	22.0	25.0	25.0	65.0	140g	-1780K
18	C	22.0	26.0	25.0	65.0	150g	-1790K
19	C	22.0	27.5	25.0	65.0	170g	-1800K
21	C	22.0	30.0	25.0	65.0	185g	-1820K



**3/8" Drive Inch Size,
Deep Length, 6-Point**

Conform to:
**SAE, USA Federal
Standard GGG-W-660A.**



Style A



Style B

Socket (Inch)	Style	Dimensions (mm)				Weight each	Order Code KEN-583
		D2	D1	L2	L		
3/8"	A	19.0	14.5	12.0	65.0	80g	-1840K
7/16"	A	19.0	17.0	25.0	65.0	80g	-1850K
1/2"	B	19.0	19.0	25.0	65.0	90g	-1860K
9/16"	B	20.0	20.0	25.0	65.0	100g	-1870K
3/4"	B	26.0	26.0	25.0	65.0	100g	-1880K

IMPACT SOCKETS - 3/8" SQUARE DRIVE

GROUP
583



Hex Driver Impact Sockets 3/8" Sq. Dr.

3/8" Hexagon sizes:
4, 5, 6, 7, 8, 10 and 12mm.
Conforms to **DIN 3129.**




Size (mm)	Overall Length	Weight each	Order Code KEN-583
4	50mm	40g	-1960K
5	50mm	45g	-1962K
6	50mm	45g	-1964K
7	50mm	45g	-1966K
8	50mm	50g	-1968K
10	50mm	60g	-1970K
12	50mm	70g	-1972K

7 Piece Set

Contents as above.

**7
PIECES**

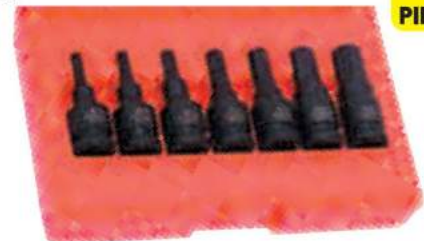

Weight each	Order Code KEN-583
550g	-9820K

Impact Socket Set

3/8" Standard length: metric 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21 and 22mm.

Standard length: A/F 1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16" and 3/4".

Deep metric: 7, 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 and 21mm.

**39
PIECES**



Weight each	Order Code KEN-583
3.50kg	-9810K

KENNEDY
QUALITY INDUSTRIAL TOOLING

Impact 3/8" Sq. Dr. Extractor Sockets



Square Drive Impact Extractor Sockets

Extracts rounded, seized or painted right hand threaded fasteners, the reverse spiral flutes are designed to bite into seized nuts and bolts providing greater grip for extraction. The ejector pin is to drive out the fasteners from sockets, once removed.

Contents: 10, 11, 12, 13, 14, 15, 16, 17 and 19mm extractor sockets plus ejector pin.



Replacement Ejector Pin

Product Number	Sizes (mm)	Weight each	Order Code KEN-583
SSE10M	10-19	660g	-9800K

To Suit	Weight each	Order Code KEN-583
SSE10M	11g	-7960K

Individual Extractor Sockets



Size (mm)	Weight each	Order Code KEN-583
10	33g	-1980K
11	34g	-1981K
12	35g	-1982K
13	36g	-1983K
14	37g	-1984K
15	51g	-1985K
16	57g	-1986K
17	68g	-1987K
19	85g	-1989K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

557

Manufactured from high quality chrome molybdenum steel. Black oxidised finish with permanent laser etched markings.

1/2" Drive Metric, Standard Length, 6-Point
Conform to: **DIN 3129.**



Style A

Style B

Style C

Socket (mm)	Style	Dimensions (mm)				Weight each	Order Code KEN-583
		D2	D1	L2	L		
9	A	25.0	12.0	12.0	38.0	90g	-2010K
10	A	25.0	17.5	12.0	38.0	90g	-2020K
11	A	25.0	18.7	12.0	38.0	95g	-2030K
12	A	25.0	20.0	12.0	38.0	100g	-2040K
13	A	25.0	21.0	12.0	38.0	100g	-2050K
14	A	25.0	22.5	12.0	38.0	100g	-2060K
15	A	30.0	23.7	12.0	38.0	140g	-2070K
16	A	30.0	25.0	12.0	38.0	140g	-2080K
17	A	30.0	26.0	13.0	38.0	140g	-2090K
18	A	30.0	27.5	13.0	38.0	140g	-2100K
19	A	30.0	28.7	13.0	38.0	140g	-2110K
20	B	30.0	30.0	13.0	38.0	140g	-2120K
21	B	30.0	30.0	13.0	38.0	130g	-2130K
22	C	30.0	32.0	13.0	38.0	140g	-2140K
23	C	30.0	32.0	13.0	38.0	140g	-2150K
24	C	30.0	35.0	20.0	45.0	180g	-2160K
26	C	30.0	38.0	22.0	50.0	200g	-2180K
27	C	30.0	38.7	22.0	50.0	310g	-2190K
28	C	30.0	40.0	22.0	50.0	230g	-2200K
30	C	30.0	42.0	22.0	50.0	230g	-2220K
32	C	30.0	44.0	28.0	50.0	250g	-2230K
36	C	30.0	49.0	28.0	50.0	250g	-2250K

Impact Socket Sets

The sockets are manufactured from the highest quality chrome molybdenum steel which is clearly laser etched with the size for easy and rapid identification. Tough, impact-resistant carry case. Conforms to: **Metric DIN 3129, Inch SAE USA Federal Standard GGG-W-660A.**

9 Piece Set - Metric

1/2" Standard length: 10, 12, 13, 14, 17, 19, 24, 27 and 30mm.

**9
PIECES**



Weight each
1.70kg

Order Code
KEN-583
-9870K

1/2" Drive Inch Size, Standard Length, 6-Point
Conform to: **SAE, USA Federal Standard GGG-W-660A.**



Style A

Style B

Style C

Socket (inch)	Style	Dimensions (mm)				Weight each	Order Code KEN-583
		D2	D1	L2	L		
3/8"	A	22.0	16.0	12.0	38.0	70g	-2270K
7/16"	A	22.0	18.0	12.0	38.0	70g	-2280K
1/2"	A	22.0	20.0	12.0	38.0	70g	-2290K
9/16"	A	24.0	22.0	12.0	38.0	80g	-2300K
5/8"	B	25.0	25.0	12.0	38.0	85g	-2320K
11/16"	B	26.0	26.0	13.0	38.0	90g	-2330K
3/4"	B	28.0	28.0	13.0	38.0	100g	-2340K
13/16"	B	30.0	30.0	13.0	38.0	125g	-2350K
7/8"	B	32.0	32.0	13.0	38.0	150g	-2360K
15/16"	B	34.0	34.0	13.0	38.0	170g	-2370K
1"	B	36.0	36.0	14.0	38.0	190g	-2380K
1 1/16"	B	38.0	38.0	16.0	40.0	205g	-2390K
1 1/8"	C	38.0	40.0	16.0	40.0	235g	-2400K
1 3/16"	C	38.0	42.0	16.0	40.0	255g	-2410K
1 1/4"	C	38.0	44.0	18.0	40.0	270g	-2420K

1/2" Drive BSW Size, Standard Length, 6-Point
Conform to: **SAE, USA Federal Standard GGG-W-660A.**



Style A

Style B

Style C

Socket (BSW)	Style	Dimensions (mm)				Weight each	Order Code KEN-583
		D2	D1	L2	L		
5/16"	A	30.0	25.0	12.0	38.0	140g	-2510K
3/8"	A	30.0	27.5	13.0	38.0	140g	-2520K
7/16"	B	30.0	30.0	13.0	38.0	140g	-2530K
1/2"	C	30.0	35.0	20.0	45.0	190g	-2540K
9/16"	C	30.0	38.0	22.0	50.0	210g	-2550K
5/8"	C	30.0	40.0	22.0	50.0	305g	-2560K
11/16"	C	30.0	44.0	28.0	50.0	305g	-2570K
3/4"	C	30.0	44.0	28.0	50.0	305g	-2580K

18 Piece Set - Metric

1/2" Standard length: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 26, 27, 30 and 32mm.

**18
PIECES**



Weight each
3.40kg

Order Code
KEN-583
-9860K



Manufactured from high quality chrome molybdenum steel. Black oxidised finish with permanent laser etched markings.


1/2" Drive Reducers & Adaptors

Male Drive x Female Drive	Weight each	Order Code KEN-583
1/2" x 3/8"	70g	-7410K
3/8" x 1/2"	70g	-7420K
3/4" x 1/2"	175g	-7430K
1/2" x 3/4"	335g	-7440K

Universal Ball Joint

Male Drive x Female Drive	Weight each	Order Code KEN-583
1/2" x 1/2"	140g	-7840K

**1/2" Drive Metric,
Deep Length, 6-Point
Conform to: DIN 3129.**



Style A

Style B

Style C

Socket (mm)	Style	Dimensions (mm)				Weight each	Order Code KEN-583
		D2	D1	L2	L		
10	A	25.0	17.5	14.0	78.0	170g	-2600K
11	A	25.0	18.7	14.0	78.0	170g	-2610K
12	A	25.0	20.0	14.0	78.0	175g	-2620K
13	A	25.0	21.0	14.0	78.0	180g	-2630K
14	A	25.0	22.5	17.0	78.0	210g	-2640K
15	A	30.0	23.7	17.0	78.0	200g	-2650K
16	A	30.0	25.0	17.0	78.0	200g	-2660K
17	A	30.0	26.0	17.0	78.0	260g	-2670K
18	A	30.0	27.5	17.0	78.0	270g	-2680K
19	A	30.0	28.7	19.0	78.0	260g	-2690K
21	B	30.0	30.0	24.0	78.0	260g	-2700K
22	C	30.0	32.0	24.0	78.0	290g	-2710K
23	C	30.0	32.0	24.0	78.0	290g	-2720K
24	C	30.0	35.0	24.0	78.0	290g	-2730K
27	C	30.0	38.7	54.0	78.0	330g	-2740K
28	C	30.0	40.0	54.0	78.0	350g	-2750K
30	C	30.0	42.0	54.0	78.0	450g	-2760K
32	C	30.0	44.0	54.0	78.0	370g	-2770K

1/2" Drive Extension Bars



Length (mm)	Weight each	Order Code KEN-583
125 (5")	230g	-7520K
150 (6")	270g	-7530K
250 (10")	445g	-7540K
300 (12")	620g	-7550K
380 (15")	740g	-7560K

Hub Nut Impact Socket Set - 7 Piece

These extra deep sockets are six point single hexagon with a black oxidised finish and conform to **DIN 3129, Inch SAE and USA Federal Standard GGG-W-660A.**

Impact resistant storage case.

Socket sizes:
29, 30, 32, 34,
35, 36 and 38mm.

**7
PIECES**



Weight each	Order Code KEN-583
5.3kg	-9888K

**1/2" Drive Inch Size, Deep Length, 6-Point
Conform to: SAE, USA Federal Standard GGG-W-660A.**

Socket (inch)	Style	Dimensions (mm)				Weight each	Order Code KEN-583
		D2	D1	L2	L		
3/8"	A	22.0	16.0	14.0	78.0	140g	-2780K
7/16"	A	22.0	18.0	14.0	78.0	160g	-2790K
1/2"	A	22.0	20.0	14.0	78.0	200g	-2800K
9/16"	A	24.0	22.0	17.0	78.0	180g	-2810K
5/8"	B	24.0	24.0	17.0	78.0	210g	-2820K
11/16"	B	26.0	26.0	17.0	78.0	190g	-2830K
3/4"	B	28.0	28.0	19.0	78.0	235g	-2840K
13/16"	B	30.0	30.0	24.0	78.0	260g	-2850K
7/8"	B	32.0	32.0	24.0	78.0	290g	-2860K
15/16"	B	34.0	34.0	24.0	78.0	340g	-2870K
1"	B	36.0	36.0	24.0	78.0	340g	-2880K
1 1/16"	B	38.0	38.0	24.0	78.0	440g	-2890K
1 1/8"	C	38.0	40.0	54.0	78.0	410g	-2900K

**1/2" Drive BSW Size, Deep Length, 6-Point
Conform to: SAE, USA Federal Standard GGG-W-660A.**

Socket (BSW)	Style	Dimensions (mm)				Weight each	Order Code KEN-583
		D2	D1	L2	L		
5/16"	A	30.0	25.0	17.0	78	200g	-2910K
3/8"	A	30.0	27.5	17.0	78	250g	-2920K
7/16"	B	30.0	30.0	24.0	78	300g	-2930K
1/2"	C	30.0	35.0	24.0	78	360g	-2940K
9/16"	C	30.0	38.7	54.0	78	440g	-2950K
5/8"	C	30.0	40.0	54.0	78	480g	-2960K
11/16"	C	30.0	44.0	54.0	78	500g	-2970K
3/4"	C	30.0	44.0	54.0	78	450g	-2980K

7 Piece Set - Deep Metric

10, 13, 14, 17, 19, 24 and 30mm.



**7
PIECES**



Weight each	Order Code KEN-583
2.20kg	-9880K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

KENNEDY
 QUALITY INDUSTRIAL TOOLING

**Impact Wheel
Nut Sockets**


Socket sizes: 17, 19 and 21mm.
 Colour coded for easy identification.
 Can be used with retainer rings or pins.



Size (mm)	Overall Length	Weight each	Order Code KEN-583
17	85mm	225g	-3080K
19	85mm	225g	-3082K
21	85mm	255g	-3084K

3 Piece Set


Contains one of each size 17, 19 and 21mm.

**3
PIECES**

 Weight
each
895g

 Order Code
KEN-583
-9886K

**Impact Hexagon
Bit Drivers**


Hexagon sizes:
 6, 7, 8, 10, 12, 14,
 15, 17, 18 and 19mm.



Size (mm)	Overall Length	Weight each	Order Code KEN-583
6	75mm	95g	-3010K
7	75mm	95g	-3012K
8	75mm	105g	-3014K
10	75mm	120g	-3016K
12	75mm	130g	-3018K
14	75mm	150g	-3020K
15	75mm	155g	-3022K
17	75mm	175g	-3024K
18	75mm	195g	-3026K
19	75mm	200g	-3028K

10 Piece Set


Contains one of each size 6mm to 19mm as shown left.

**10
PIECES**

 Weight
each
1.76kg

 Order Code
KEN-583
-9882K

**Impact TX Bit
Driver Sockets**


TX drivers:
 T40, T45, T47,
 T50, T55, T60
 and T70.



Size	Overall Length	Weight each	Order Code KEN-583
T40	55mm	80g	-3060K
T45	55mm	80g	-3062K
T47	55mm	85g	-3064K
T50	55mm	85g	-3066K
T55	55mm	90g	-3068K
T60	55mm	95g	-3070K
T70	55mm	105g	-3072K

16 Piece Set Contents:


TX drivers (length 55mm):
 T40, T45, T47, T50, T55, T60, T70.

TX sockets: E10, E11, E12, E14, E16, E18, E20, E22, E24.
 Conform to **DIN 3129**. Supplied in tough, impact-resistant plastic storage case.

**16
PIECES**
Impact TX Sockets



Size	Overall Length	Weight each	Order Code KEN-583
E10	40mm	70g	-3040K
E11	40mm	70g	-3042K
E12	40mm	70g	-3044K
E14	45mm	75g	-3046K
E16	45mm	75g	-3048K
E18	45mm	75g	-3050K
E20	45mm	115g	-3052K
E22	45mm	140g	-3054K
E24	45mm	145g	-3056K


 Weight
each
1.91kg

 Order Code
KEN-583
-9884K



Manufactured from high quality chrome molybdenum steel. Black oxidised finish with permanent laser etched markings.

3/4" Drive Metric, Standard Length, 6-Point
Conform to: **DIN 3129.**



Socket (mm)	Style	Dimensions (mm)				Weight each	Order Code
		D2	D1	L2	L		KEN-583
16	A	44.0	27.0	11.0	50.0	367g	-3090K
17	A	44.0	31.0	12.0	50.0	400g	-3100K
18	A	44.0	32.0	13.0	50.0	433g	-3110K
19	A	44.0	33.0	13.0	50.0	433g	-3120K
20	A	44.0	34.0	14.0	50.0	433g	-3130K
21	A	44.0	35.0	15.0	50.0	400g	-3140K
22	A	44.0	37.0	15.0	50.0	400g	-3150K
23	A	44.0	38.0	16.0	50.0	400g	-3160K
24	A	44.0	39.0	16.0	50.0	433g	-3170K
25	A	44.0	40.0	16.0	50.0	433g	-3180K
26	A	44.0	41.0	16.0	50.0	433g	-3190K
27	A	44.0	43.0	19.0	54.0	433g	-3200K
28	B	44.0	44.0	19.0	54.0	433g	-3210K
29	C	44.0	45.0	21.0	54.0	450g	-3220K
30	C	44.0	47.0	21.0	54.0	500g	-3230K
32	C	44.0	49.0	22.0	56.0	500g	-3240K
33	C	44.0	51.0	22.0	56.0	500g	-3250K
34	C	44.0	52.0	22.0	56.0	550g	-3260K
35	C	44.0	53.0	22.0	56.0	550g	-3270K
36	C	44.0	54.0	25.0	56.0	600g	-3280K
38	C	44.0	57.0	25.0	58.0	600g	-3300K
41	C	44.0	60.0	27.0	58.0	700g	-3310K
42	C	44.0	62.0	27.0	58.0	700g	-3320K
46	C	44.0	67.0	30.0	63.0	800g	-3330K
47	C	44.0	68.0	30.0	68.0	900g	-3340K
50	C	54.0	71.0	32.0	72.0	1200g	-3350K

3/4" Drive Metric, Deep Length, 6-Point
Conform to: **DIN 3129.**



Socket (mm)	Style	Dimensions (mm)				Weight each	Order Code
		D2	D1	L2	L		KEN-583
17	A	44.0	31.0	17.0	95.0	600g	-3810K
18	A	44.0	32.0	18.0	95.0	600g	-3820K
19	A	44.0	33.0	19.0	95.0	600g	-3830K
21	A	44.0	35.0	21.0	95.0	650g	-3850K
22	A	44.0	37.0	22.0	95.0	700g	-3860K
24	A	44.0	39.0	24.0	95.0	700g	-3880K
25	A	44.0	40.0	25.0	95.0	700g	-3890K
26	A	44.0	41.0	26.0	95.0	700g	-3900K
27	A	44.0	43.0	27.0	95.0	700g	-3910K
28	B	44.0	44.0	28.0	95.0	750g	-3920K
30	C	44.0	47.0	30.0	95.0	800g	-3940K
32	C	44.0	49.0	32.0	95.0	900g	-3960K
33	C	44.0	51.0	33.0	95.0	1000g	-3970K
34	C	44.0	52.0	34.0	95.0	1000g	-3980K
36	C	44.0	54.0	36.0	95.0	1000g	-4000K
38	C	44.0	57.0	38.0	95.0	1100g	-4020K
41	C	44.0	60.0	38.0	95.0	900g	-4050K
42	C	44.0	62.0	38.0	95.0	1100g	-4060K
46	C	44.0	67.0	38.0	95.0	1300g	-4100K
47	C	44.0	68.0	38.0	95.0	1300g	-4110K

IMPACT SOCKETS - 3/4" SQUARE DRIVE

3/4" Drive Inch Size, Standard Length, 6-Point
Conform to: **SAE, USA Federal Standard GGG-W-660A.**

		Style A			Style B		Style C	
Socket (inch)	Style	Dimensions (mm)				Weight each	Order Code KEN-583	
		D2	D1	L2	L			
5/8"	A	38.0	27.5	11.0	50	267g	-3360K	
11/16"	A	38.0	29.0	12.0	50	267g	-3370K	
3/4"	A	38.0	30.0	13.0	50	267g	-3380K	
13/16"	A	38.0	32.0	15.0	52	300g	-3390K	
7/8"	A	38.0	34.0	15.0	52	300g	-3400K	
15/16"	A	38.0	36.0	16.0	52	300g	-3410K	
1"	C	38.0	40.0	16.0	52	333g	-3420K	
1 1/16"	C	38.0	40.0	19.0	52	333g	-3430K	
1 1/8"	B	42.0	42.0	21.0	52	333g	-3440K	
1 3/16"	B	44.0	44.0	21.0	52	367g	-3450K	
1 1/4"	B	44.0	44.0	22.0	52	367g	-3460K	
1 5/16"	C	44.0	47.0	22.0	56	450g	-3470K	
1 3/8"	C	44.0	50.0	22.0	56	450g	-3480K	
1 7/16"	C	44.0	51.0	25.0	56	500g	-3490K	
1 1/2"	C	44.0	53.0	25.0	56	500g	-3500K	
1 5/8"	C	44.0	58.0	27.0	62	700g	-3520K	
1 11/16"	C	44.0	63.5	27.0	62	800g	-3530K	
1 3/4"	C	44.0	65.0	27.0	62	800g	-3540K	
1 13/16"	C	44.0	67.0	30.0	68	900g	-3550K	
1 7/8"	C	44.0	68.0	30.0	68	900g	-3560K	

3/4" Drive BSW Size, Standard Length, 6-Point
Conform to: **SAE, USA Federal Standard GGG-W-660A.**

		Style A			Style C		
Socket (BSW)	Style	Dimensions (mm)				Weight each	Order Code
		D2	D1	L2	L		KEN-583
9/16"	A	44.0	41.0	16.0	50	433g	-3620K
11/16"	C	44.0	48.0	21.0	56	450g	-3640K
3/4"	C	44.0	51.0	22.0	56	500g	-3650K
7/8"	C	44.0	57.0	25.0	58	600g	-3670K
1"	C	44.0	63.0	27.0	63	800g	-3690K
1 1/8"	C	44.0	68.0	30.0	68	900g	-3710K
1 1/4"	C	44.0	74.0	32.0	72	1100g	-3720K

3/4" Drive Inch Size, Deep Length, 6-Point

Conform to: **SAE, USA Federal Standard GGG-W-660A.**



3/4" Drive Inch Size,

Deep Length, 6-Point

Conform to: SAE, USA

Federal Standard

GGG-W-660A.



Style A



Style B



Style C

Socket (inch)	Style	Dimensions (mm)				Weight each	Order Code KEN-583
		D2	D1	L2	L		
3/4"	A	38.0	30.0	19.0	85.0	433g	-4160K
7/8"	A	38.0	34.0	22.0	85.0	467g	-4180K
15/16"	A	38.0	36.0	24.0	85.0	467g	-4190K
1"	C	38.0	40.0	25.0	85.0	550g	-4200K
1 1/16"	C	38.0	40.0	27.0	85.0	550g	-4210K
1 1/8"	B	42.0	42.0	29.0	85.0	550g	-4220K
1 3/16"	B	44.0	44.0	30.0	85.0	600g	-4230K
1 1/4"	C	44.0	49.0	32.0	85.0	800g	-4240K
1 5/16"	C	44.0	50.0	34.0	85.0	800g	-4250K
1 7/16"	C	44.0	51.0	37.0	85.0	800g	-4270K
1 1/2"	C	44.0	57.0	38.0	95.0	1100g	-4280K
1 7/8"	C	44.0	68.0	38.0	95.0	1100g	-4340K

3/4" Drive BSW Size, Deep Length, 6-Point
Conform to: **SAE, USA Federal Standard GGG-W-660A.**

Socket (BSW)	Style	Dimensions (mm)				Weight each	Order Code
		D2	D1	L2	L		KEN-583
3/4"	C	44.0	51.0	33.0	95	1000g	-4450K
13/16"	C	44.0	53.0	35.0	95	1000g	-4460K
7/8"	C	44.0	57.0	38.0	95	1100g	-4470K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

KENNEDY Chrome Molybdenum
Impact Sockets

Manufactured from high quality chrome molybdenum steel. Black oxidised finish with permanent laser etched markings.



Male Drive x Female Drive	Weight each	Order Code KEN-583
3/4" x 1/2"	175g	-7430K
1/2" x 3/4"	335g	-7440K
1" x 3/4"	175g	-7450K

Universal Ball Joint

Male Drive x Female Drive	Weight each	Order Code KEN-583
3/4" x 3/4"	640g	-7860K

Retaining Rings
Supplied with pins

To Suit Outside Dia.	Square Drive	Weight each	Order Code KEN-583
38 - 44mm	3/4"	8g	-8200K
48 - 54mm	3/4"	16g	-8210K
46 - 58mm	1"	16g	-8300K
62mm	1"	18g	-8310K
78 - 86mm	1"	31g	-8320K

**1" Drive Metric, Standard Length, 6-Point**
Conform to: DIN 3129.

Socket (mm)	Style	Dimensions (mm)				Weight each	Order Code KEN-583
		D2	D1	L2	L		
21	A	54.0	38.0	15.0	60.0	700g	-5050K
22	A	54.0	40.0	15.0	60.0	700g	-5060K
24	A	54.0	42.0	18.0	60.0	800g	-5080K
25	A	54.0	43.0	18.0	60.0	800g	-5090K
26	A	54.0	44.5	18.0	60.0	800g	-5100K
27	A	54.0	46.0	19.0	60.0	800g	-5110K
28	A	54.0	47.0	19.0	62.0	800g	-5120K
29	A	54.0	48.0	19.0	62.0	800g	-5130K
30	A	54.0	50.0	21.0	62.0	700g	-5140K
32	A	54.0	52.0	22.0	62.0	800g	-5160K
33	A	54.0	53.0	22.0	62.0	800g	-5170K
34	B	54.0	55.0	22.0	62.0	800g	-5180K
35	B	54.0	55.0	22.0	62.0	800g	-5190K
36	B	54.0	57.0	25.0	67.0	900g	-5200K
37	B	54.0	59.0	25.0	67.0	900g	-5210K
38	B	54.0	60.0	25.0	67.0	900g	-5220K
41	B	54.0	63.0	27.0	70.0	1000g	-5250K
42	B	54.0	65.0	27.0	74.0	1200g	-5260K
46	B	54.0	70.0	30.0	76.0	1200g	-5290K
47	B	54.0	71.5	32.0	76.0	1200g	-5300K
48	B	54.0	72.5	32.0	76.0	1200g	-5310K
50	B	54.0	75.0	35.0	80.0	1500g	-5330K
52	B	54.0	77.0	35.0	84.0	1500g	-5350K
55	B	54.0	81.0	35.0	84.0	1750g	-5380K
56	B	54.0	82.0	40.0	84.0	1750g	-5390K
60	B	54.0	87.0	42.0	87.0	1750g	-5430K
65	B	54.0	93.0	42.0	90.0	2000g	-5460K
70	B	54.0	100.0	42.0	96.0	3000g	-5480K
75	B	86.0	106.0	45.0	98.0	4000g	-5500K
80	B	86.0	112.0	48.0	100.0	4000g	-5520K
85	B	86.0	118.0	52.0	105.0	5000g	-5530K
90	B	86.0	125.0	52.0	105.0	5000g	-5550K
95	B	86.0	131.0	52.0	115.0	6000g	-5570K
100	B	95.0	137.0	58.0	115.0	7000g	-5580K

7 Piece Set - Metric
Standard length:
19, 24, 27, 30,
32, 36 and
46mm.**7
PIECES**Weight
each
4.20kgOrder Code
KEN-583
-9890K**3/4" Drive Extension Bars**

Length (mm)	Weight each	Order Code KEN-583
100 (4")	470g	-7570K
150 (6")	810g	-7580K
230 (9")	900g	-7600K
250 (10")	1350g	-7610K
300 (12")	1500g	-7620K
400 (15 3/4")	1900g	-7640K

**1" Drive Inch Size, Standard Length, 6-Point**
Conform to: SAE, USA Federal Standard GGG-W-660A.

Socket (inch)	Style	Dimensions (mm)				Weight each	Order Code KEN-583
		D2	D1	L2	L		
7/8"	A	51.0	39.0	15.0	58.0	550g	-5610K
15/16"	A	51.0	40.0	18.0	58.0	550g	-5620K
1"	A	51.0	42.0	18.0	58.0	550g	-5630K
1 1/16"	A	51.0	44.0	19.0	58.0	600g	-5640K
1 1/8"	A	51.0	46.0	19.0	58.0	600g	-5650K
1 3/16"	A	51.0	48.0	21.0	60.0	650g	-5660K
1 1/4"	B	51.0	51.0	22.0	60.0	650g	-5670K
1 5/16"	C	52.0	53.0	22.0	62.0	733g	-5680K
1 7/16"	C	52.0	56.0	25.0	62.0	700g	-5700K
1 1/2"	C	52.0	58.0	25.0	62.0	800g	-5710K
1 9/16"	C	52.0	60.0	25.0	62.0	800g	-5720K
1 5/8"	C	52.0	61.5	27.0	62.0	800g	-5730K
1 11/16"	C	52.0	65.0	27.0	64.0	900g	-5740K
1 3/4"	C	58.0	66.0	27.0	64.0	1000g	-5750K
1 13/16"	C	58.0	68.0	30.0	64.0	1100g	-5760K
1 7/8"	C	58.0	70.0	32.0	66.0	1100g	-5770K
2"	C	58.0	74.0	35.0	70.0	1250g	-5790K
2 1/16"	C	58.0	75.0	35.0	70.0	1250g	-5800K
2 1/8"	C	58.0	78.0	35.0	70.0	1250g	-5810K
2 3/16"	C	62.0	80.0	35.0	72.0	1500g	-5820K
2 1/4"	C	62.0	84.0	40.0	75.0	1500g	-5830K
2 3/8"	C	62.0	87.0	42.0	78.0	1500g	-5850K
2 1/2"	C	62.0	91.0	42.0	80.0	2500g	-5870K
2 9/16"	C	62.0	93.0	42.0	80.0	2500g	-5880K
2 5/8"	C	62.0	95.0	42.0	82.0	2500g	-5890K
2 3/4"	C	62.0	100.0	42.0	96.0	3000g	-5910K
2 13/16"	C	62.0	102.0	45.0	96.0	4000g	-5920K
3"	C	86.0	107.0	48.0	100.0	4000g	-5950K
3 1/8"	C	86.0	111.0	48.0	100.0	5000g	-5970K
3 1/2"	C	86.0	124.0	52.0	105.0	5000g	-6000K

**1" Drive BSW Size, Standard Length, 6-Point**Conform to: SAE, USA Federal
Standard GGG-W-660A.**Style A****Style B**

Socket (BSW)	Style	Dimensions (mm)				Weight each	Order Code KEN-583
		D2	D1	L2	L		
1 1/16"	A	54.0	51.0	21.0	62	800g	-6080K
3/4"	B	54.0	53.0	22.0	62	800g	-6090K
13/16"	B	54.0	56.0	22.0	65	800g	-6100K
1"	B	54.0	66.0	27.0	74	1200g	-6130K
1 1/8"	B	56.0	70.0	32.0	66	1100g	-6140K
1 1/4"	B	54.0	77.0	36.0	84	1500g	-6150K
1 1/2"	B	62.0	89.0	42.0	78	1500g	-6170K



KENNEDY
QUALITY INDUSTRIAL TOOLING

Chrome Molybdenum Impact Sockets & Accessories

Manufactured from high quality chrome molybdenum steel. Black oxidised finish with permanent laser etched markings.

1" Drive Metric, Deep Length, 6-Point

Conform to: **DIN 3129.**



Style A



Style B

Socket (mm)	Style	Dimensions (mm)				Weight each	Order Code KEN-583
		D2	D1	L2	L		
23	A	54.0	41.0	23.0	100.0	1200g	-6250K
24	A	54.0	42.0	24.0	100.0	1200g	-6260K
27	A	54.0	46.0	27.0	100.0	1200g	-6290K
28	A	54.0	47.0	28.0	100.0	1200g	-6300K
30	A	54.0	50.0	30.0	100.0	1200g	-6320K
32	A	54.0	52.0	32.0	100.0	1400g	-6340K
33	A	54.0	53.0	33.0	100.0	1400g	-6350K
34	B	54.0	55.0	34.0	100.0	1400g	-6360K
36	B	54.0	57.0	35.0	100.0	1400g	-6380K
37	B	54.0	59.0	37.0	100.0	1400g	-6390K
38	B	54.0	60.0	38.0	100.0	1400g	-6400K
41	B	54.0	63.0	38.0	100.0	1400g	-6430K
42	B	54.0	65.0	38.0	100.0	1400g	-6440K
46	B	54.0	70.0	38.0	100.0	1600g	-6480K
50	B	54.0	75.0	38.0	100.0	2000g	-6520K
52	B	54.0	77.0	40.0	100.0	1750g	-6540K
55	B	54.0	81.0	40.0	100.0	2000g	-6570K
56	B	54.0	82.0	40.0	105.0	2000g	-6580K
60	B	54.0	87.0	42.0	120.0	2500g	-6630K
65	B	54.0	93.0	42.0	125.0	3500g	-6660K
70	B	54.0	100.0	42.0	125.0	5000g	-6680K
75	B	86.0	106.0	45.0	135.0	6000g	-6700K
80	B	86.0	112.0	48.0	135.0	6000g	-6720K

Universal Ball Joint

Male Drive x Female Drive	Weight each	Order Code KEN-583
1" x 1"	640g	-7880K

1" Drive Reducers & Adaptors

Male Drive x Female Drive	Weight each	Order Code KEN-583
3/4" x 1"	335g	-7460K
1 1/2" x 1"	670g	-7480K

1" Drive Extension Bars

Length (mm)	Weight each	Order Code KEN-583
100 (4")	590g	-7650K
150 (6")	610g	-7660K
200 (8")	1000g	-7680K
250 (10")	2100g	-7690K
300 (12")	2500g	-7700K
380 (15")	2600g	-7720K

1" Drive Inch Size, Deep Length, 6-Point

Conform to: **SAE, USA Federal Standard GGG-W-660A.**



Style A

Socket (inch)	Style	Dimensions (mm)				Weight each	Order Code KEN-583
		D2	D1	L2	L		
1"	A	51.0	42.0	25.0	90.0	900g	-6760K
1 1/16"	A	51.0	44.0	27.0	90.0	1000g	-6770K
1 1/8"	A	51.0	46.0	29.0	90.0	1000g	-6780K
1 3/16"	A	51.0	48.0	30.0	90.0	1000g	-6790K
1 1/4"	B	51.0	51.0	32.0	90.0	1000g	-6800K
1 5/16"	C	52.0	53.0	34.0	90.0	1200g	-6810K
1 3/8"	C	52.0	54.0	35.0	90.0	1200g	-6820K
1 1/2"	C	52.0	58.0	38.0	92.0	1200g	-6840K
1 9/16"	C	52.0	60.0	38.0	92.0	1200g	-6850K
1 5/8"	C	52.0	61.5	38.0	92.0	1200g	-6860K
1 11/16"	C	52.0	65.0	38.0	92.0	1200g	-6870K
1 3/4"	C	58.0	66.0	38.0	92.0	1400g	-6880K
1 13/16"	C	58.0	68.0	38.0	92.0	1400g	-6890K
1 7/8"	C	58.0	70.0	38.0	92.0	1600g	-6900K
1 15/16"	B	58.0	72.0	38.0	100.0	1500g	-6910K
2"	C	58.0	74.0	40.0	95.0	1750g	-6920K
2 1/16"	C	58.0	75.0	40.0	95.0	1750g	-6930K
2 1/8"	C	58.0	78.0	40.0	100.0	2000g	-6940K
2 3/16"	C	62.0	80.0	40.0	100.0	2250g	-6950K
2 1/4"	C	62.0	84.0	40.0	100.0	2500g	-6960K
2 5/16"	C	62.0	86.0	40.0	105.0	2500g	-6970K
2 3/8"	C	62.0	87.0	42.0	105.0	3000g	-6980K
2 7/16"	C	62.0	89.0	42.0	110.0	3000g	-6990K
2 1/2"	C	62.0	91.0	42.0	110.0	4000g	-7000K
2 5/8"	C	62.0	95.0	42.0	125.0	4000g	-7020K
2 3/4"	C	62.0	100.0	42.0	125.0	4000g	-7040K
2 7/8"	C	86.0	104.0	42.0	125.0	5000g	-7060K
2 15/16"	C	86.0	105.0	45.0	135.0	6000g	-7070K
3"	C	86.0	107.0	48.0	135.0	6000g	-7080K
3 1/8"	B	86.0	111.0	48.0	135.0	6000g	-7100K

1" Drive BSW Size, Deep Length, 6-Point

Conform to: **SAE, USA Federal Standard GGG-W-660A.**

Socket (BSW)	Style	Dimensions (mm)				Weight each	Order Code KEN-583
		D2	D1	L2	L		
3/4"	A	54.0	53.0	50.0	100	1500g	-7150K
1 3/8"	B	54.0	81.0	65.0	105	1500g	-7220K
1 1/2"	B	54.0	86.0	77.0	120	2000g	-7230K
1 3/4"	B	54.0	99.0	80.0	155	2500g	-7250K

7 Piece Impact Socket Set

Socket sizes:
27, 30, 32, 33, 36, 41 and 46mm.



**7
PIECES**



Weight each	Order Code KEN-583
5.95kg	-9920K



1 1/2" Drive Metric Size, Standard Length, 6-Point

Conform to: **SAE, USA Federal Standard GGG-W-660A.**

Socket (mm)	Style	Dimensions (mm)				Order Code KEN-583
		D2	D1	L2	L	
30		54.0	56.0	21.0	78.0	-8430K
32		54.0	58.0	22.0	78.0	-8432K
33		54.0	60.0	22.0	78.0	-8433K
36		54.0	64.0	24.0	78.0	-8436K
38		54.0	66.0	26.0	80.0	-8438K
41		54.0	70.0	28.0	80.0	-8441K
46		54.0	76.0	30.0	84.0	-8446K
48		54.0	79.0	32.0	87.0	-8448K
50		54.0	81.0	32.0	87.0	-8450K
52		54.0	83.0	34.0	87.0	-8452K
55		54.0	87.0	37.0	90.0	-8455K
56		54.0	88.0	37.0	92.0	-8456K
60		54.0	94.0	39.0	95.0	-8460K
65		54.0	100.0	42.0	100.0	-8465K
70		54.0	106.0	46.0	105.0	-8470K
75		54.0	112.0	49.0	108.0	-8475K
80		54.0	119.0	53.0	115.0	-8480K
85		54.0	125.0	56.0	118.0	-8485K
95		54.0	137.0	61.0	123.0	-8495K


PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

KENNEDY
QUALITY INDUSTRIAL TOOLING
Chain Separators

All steel construction, industry quality roller and bush chain separator. Designed for separating roller and bush chains that have end softened pins. To remove hardened pins the ends must first be removed by grinding. Simple to operate: Grip the chain in the self-closing jaws that also supports the chain to prevent twisting as the link pins are driven out. Then turn the T-handle to drive the pins out. Always ensure that the machine is switched off before disconnecting or connecting a chain.



Model SCS1
Chain: 9.525 - 15.875mm (0.375" - 0.625") pitch, to **BS & ANSI** standard.



Roller Chain
Pin, roller and bush assembly.

Bush Chain
Identical to roller chain, but with the omission of the roller.

Model LCS2
Chain: 19.05 - 31.75mm (0.75 - 1.25") pitch, to **BS** standard.
Chain: 19.05 - 25.40mm (0.75 - 1.00") pitch, to **ANSI** standard.

Product Number	Weight each	Order Code
SCS1	445g	-1010K
LCS2	765g	-1020K

Adjustable Strap Wrench


Industrial strength rubber strap. Strap can be easily adjusted and used on irregular shapes.



Capacity (mm)	Weight each	Order Code
15 to 150	600g	-1500K

Chain Pipe Wrenches

For gripping tubes, piping and irregular shaped objects. The chain is looped around the object and locked on the head. The head will automatically grip in the direction of the turn and the object can be rotated. The head is double ended and fully reversible for longer tool life. Manufactured from hardened and tempered carbon steel to US specification **GG-W-651**.

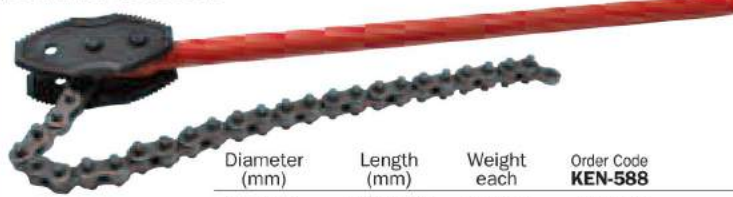

Diameter (mm)	Length (mm)	Weight each	Order Code
100 (4")	900 (36")	8.50kg	-4560K

KENNEDY
QUALITY INDUSTRIAL TOOLING
Self Adjusting Basin Wrenches
Heavy Duty

With spring loaded jaws of hardened forged and milled steel. Jaw swivels 180° allowing easy tightening and loosening of basin nuts on both 15mm and 22mm pipes.




With sliding tommy bar.
Capacity:
10 - 32mm (3/8" - 1 1/4").

Overall Length	Weight each	Order Code
265mm	520g	-6020K

Telescopic Type Basin Wrench

Box section extending shank with spring loaded retainer. Spring loaded jaws of hardened forged and milled steel. Jaw swivels 180° allowing easy tightening and loosening of basin nuts on both 15mm and 22mm pipes.

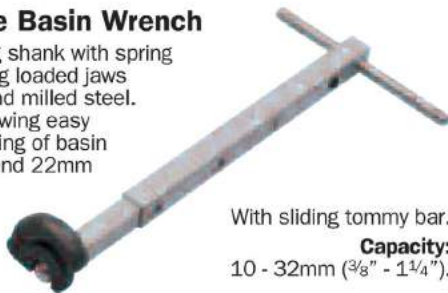

With sliding tommy bar.
Capacity:
10 - 32mm (3/8" - 1 1/4").

Overall Length	Weight each	Order Code
245mm	840g	-6030K

Plumber's Kit

Supplied in a robust toolbox c/w double latch.

Contents:

- Tuff-E tool box - 7190RD-50BP.
- 255mm (10") stillson wrench.
- 3 - 22mm capacity tubing cutter.
- 3 - 41mm tube deburrer.
- 9.5 - 32mm basin wrench.
- 300mm girder section spirit level.
- Telescopic inspection mirror.
- Junior hacksaw frame c/w hardened blade.
- Pad saw.
- 255mm groove slip joint water pump plier.
- 6 piece flat wood bit set 9.5 - 25mm.
- 12mm x 12mm PTFE thread sealing tape to **BS6920**.
- 100g fluxite paste.
- Powerflow lead free solder 3.25mm 250g.

- 3 row plastic handle wire scratch brush.
- 450g (1lb) grade 2 wire wool.
- Blow lamp and 2175 gas cartridge.



**23
PIECES**

Weight each
6.2kg

Order Code
-4010K

9-in-1 Universal Key Wrench

Can be used on most technical locking systems in electrical engineering, supply of gas, water, air conditioning and ventilation systems.

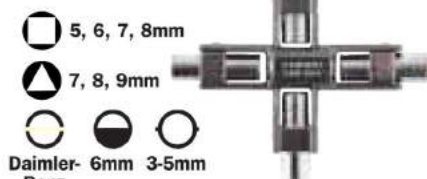

5, 6, 7, 8mm
7, 8, 9mm
Daimler- 6mm 3-5mm
Benz

Order Code
-4640K

Back Spanner Basin Wrenches

For use in vertical or horizontal confined spaces. Grips on smooth and oily surfaces. Double ended wrench for 13mm (1/2") and 32mm (1 1/4") lavatory and basin nuts. Made from cast iron.



Overall Length	Weight each	Order Code
350mm	590g	-6000K

Immersion Heater Box Spanner

This heavy duty box spanner complete with tommy bar will reach recessed elements on most hot water tanks.



Capacity	Weight each	Order Code
86mm	520g	-6050K

KENNEDY Drain Rods

Use for cleaning and unblocking drains, pipes and sewers. A range of accessories are also available including drop scrapers, double worm screws and plungers. Manufactured from polypropylene fitted with solid brass joints securely fitted with brass rivets. Rods are strong, durable and rigid with the right amount of drain rod flexibility.

DRAINAGE EQUIPMENT

GROUP
588



Available with two different types of joint;

Universal: rods fitted with this type of joint should only be rotated in a clockwise direction.

Lockfast: rods fitted with this type of joint can be rotated in either direction and will remain secure in the most demanding conditions.



Type	Weight each	Order Code KEN-588	Type	Weight each	Order Code KEN-588
Universal	190g	-7240K	Lockfast	245g	-7250K

Drain Rod Sets

Use for cleaning and unblocking drains, pipes and sewers. Manufactured from polypropylene fitted with solid brass joints securely fitted with brass rivets. Rods are strong, durable and rigid with the right amount of drain rod flexibility.

Contents:

10x 20 x 900mm rods,
1x 100mm double worm screw,
1x 100mm plunger,
1x 100mm drop scraper,
All supplied with two rod ties.



Type	Weight each	Order Code KEN-588	Type	Weight each	Order Code KEN-588
Universal	2.37kg	-7200K	Lockfast	2.60kg	-7210K

Accessories

Available with two different type of joints:

Universal: rods fitted with this type of joint should only be rotated in a clockwise direction.

Lockfast: rods fitted with this type of joint can be rotated in either direction and will remain secure in the most demanding conditions.

Double Worm Screw

Pierces blockages such as paper or rags and the obstruction is drawn back to clear the pipe.



Size	Type	Weight each	Order Code KEN-588
100mm (4")	Universal	135g	-7340K
100mm (4")	Lockfast	155g	-7350K

Accessories Continued

Rubber Plunger

Builds up pressure of water to force obstruction clear. One piece rubber.



Size	Type	Weight each	Order Code KEN-588
100mm (4")	Universal	120g	-7300K
100mm (4")	Lockfast	125g	-7310K
150mm (6")	Universal	230g	-7420K
150mm (6")	Lockfast	250g	-7430K

Drop Scraper

Glides over small obstructions and drops into a vertical position to allow material to be dragged back.



Size	Type	Weight each	Order Code KEN-588
100mm (4")	Universal	125g	-7380K
100mm (4")	Lockfast	140g	-7390K
150mm (6")	Universal	240g	-7460K
150mm (6")	Lockfast	250g	-7470K

KENNEDY Pipe Unblocker

This pipe unblocker is easy to use and comes with a corrosion-resistant body. Its 4.6m coil length makes it ideal for unblocking domestic waste/drain pipes.

Order Code
KEN-588
-6700K



Air Drain Test Kit

Used for testing for leaks in pipes of up to 4" water gauge.

Contents:

4" 'U' gauge, 9' length of tubing, hand bellows, 'Y' piece, 1/2" and 1" test nipple cap.

Order Code
KEN-588
-7600K

new



Drain Test Bungs

Used to pressure test or temporarily seal the end of an open pipe which is newly laid or decommissioned, preventing the ingress of water, gases, rodents.

Pipe Size Metric	Capacity Inch	Min/Max Operating Range	BSP Outlet	Order Code KEN-588
100	4"	94-110mm	1/2"	-7500K
150	6"	146-163mm	1/2"	-7510K
200	8"	191-211mm	1"	-7520K
225	9"	216-235mm	1"	-7530K
300	12"	296-314mm	1"	-7540K



Drain Rod Bag

Used for carrying up to 10x 36" rods.



Capacity	Weight each	Order Code KEN-588
10 Rods	160g	-7280K

Drain Testing Dye

Used to locate the direction of water flow in pipes, drains etc. soluble in water. 200g jars.



Colour	Weight each	Order Code KEN-588
Green	200g	-7700K
Red	200g	-7710K
Blue	200g	-7720K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

565

KENNEDY Spring Loaded Pipe Cutter

Designed to cut copper, brass, aluminium, plastic and thin wall conduit, this pipe cutter has a 3-30mm capacity and spring loaded mechanism. It also features an internal pipe deburrer.



Capacity (mm)	Weight each	Order Code KEN-588
3 - 30		-4720K

2-in-1 Automatic Ratcheting Pipe Cutter

Designed to cut copper, brass, aluminium, plastic and thin wall conduit, this pipe cutter has a 6 - 28mm capacity and spring loaded mechanism. It features a detachable ratchet handle for use in tight work areas and has a hanging hole for storage.



Capacity (mm)	Weight each	Order Code KEN-588
6 - 28		-4700K
Spare Cutter	5g	-4690K

4-Wheel Heavy Duty Pipe Cutters

With high strength cast bodies and single cutting wheels with four rollers for straighter cuts. Spring-loaded release mechanism allows quick diameter adjustment and release. Suitable for aluminium, brass and copper tubes. Fitted with deburring blades.



For Aluminium, Brass, Copper & Steel

Capacity (mm)	Weight each	Order Code KEN-588
5 - 64	625g	-5550K
Spare Cutter	5g	-5690K

Replacement Cutter Wheel



-5690K

Midget Pipe Cutter

For use on copper, brass, aluminium and thin wall conduit. Supplied with spare blade.

Width: 25mm.
Overall length: 95mm.



Capacity (mm)	Weight each	Order Code KEN-588
3 - 28	270g	-5490K
Spare Cutter	5g	-5800K

Pipe Cutters

With high strength cast bodies and single cutting wheels with two rollers. Suitable for stainless steel, brass and copper tubes. All fitted with deburring blades.



-5500K

For Aluminium, Brass, Copper & Steel

Capacity (mm)	Weight each	Order Code KEN-588
3 - 30	195g	-5500K
Spare Cutter	5g	-5590K



-5720K

For Stainless Steel

Capacity (mm)	Weight each	Order Code KEN-588
3 - 32	310g	-5720K
Spare Cutter	5g	-5790K

Mini Pipe Cutter

Compact and robust construction ideal for use in confined spaces. Grooved rollers allow close-to-flare cuts. Large feed screw for accurate cutting of aluminium, brass, copper and steel tubing.

Length: 66mm.



For Aluminium, Brass, Copper & Steel

Capacity (mm)	Weight each	Order Code KEN-588
3 - 22	140g	-5450K
Spare Cutter	5g	-5800K

For Stainless Steel

Capacity (mm)	Weight each	Order Code KEN-588
3 - 22	140g	-5700K
Spare Cutter	5g	-5790K

Pipe Deburrer

For internal and external edges.



Capacity (mm)	Weight each	Order Code KEN-588
3-40	250g	-5900K

Automatic Pipe Cutters


These robust pipe cutters will cut copper, brass, aluminium, PVC and thin-wall conduit. They automatically tighten and cut when turned around the pipe. The compact design makes them ideal for working in confined spaces.



Capacity	Weight each	Order Code KEN-588
15mm	186g	-4800K
22mm	192g	-4820K
Spare Cutter	5g	-4840K

Rubber Hose Cutter

6 - 37mm cutting capacity. Spring opening. Lightweight moulded polypropylene body. Stainless steel blade. Guillotine action ensures a clean cut every time. Handle retaining hook for compact storage and blade safety. Reversible blade. Not suitable for cutting metal.



Capacity (mm)	Weight each	Order Code KEN-588
6 - 37	270g	-5000K

Plastic Pipe Cutter - Mini Hose Type

Manufactured from tough hard wearing ABS plastic. Spring loaded with a heat-treated steel blade.



Capacity	Weight each	Order Code KEN-588
12.7mm	35g	-5400K

Cuts thin wall pipe (stainless steel, copper, PVC etc.) up to 2.6mm thickness. The grip action eliminates hand gripping effort to ensure perfect tracking. Can be used for efficient cutting of exhaust pipes.



Capacity	Overall Length	Weight each	Order Code KEN-588
15 - 75mm	250mm	800g	-5100K

Plastic Pipe Cutters

Stainless steel blade. Diecast alloy body. Extra wide lower jaws for easy production of 90° cuts. Guillotine action ensures a clean cut every time. Handle retaining loop for compact storage and blade safety. Replaceable blade. Not suitable for cutting metal.



Capacity	Ratchet stages	Order Code KEN-588
6 - 36mm	4	-5840K
Spare blade - Stainless Steel		-5880K
12 - 42mm	7	-5842K
Spare blade - Stainless Steel		-5882K
25 - 63mm	5	-5844K
Spare blade - Stainless Steel		-5884K

3-in-1 Bender

For bending 3, 4 and 6mm diameter copper and aluminium tubes up to 90°. With a graduated scale for partial bending. Ribbed die-cast aluminium construction for lightness and strength.


Length: 140mm.



Capacity (mm)	Weight each	Order Code KEN-588
3, 4 & 6	150g	-6080K

3-in-1 Mini Bender

For bending 6, 8 and 10mm diameter copper and aluminium tubes up to 90°. Calibrated for left hand, right hand or offset ends in copper, brass, aluminium or steel. With a graduated scale for partial bending. Ribbed die-cast aluminium construction for lightness and strength.

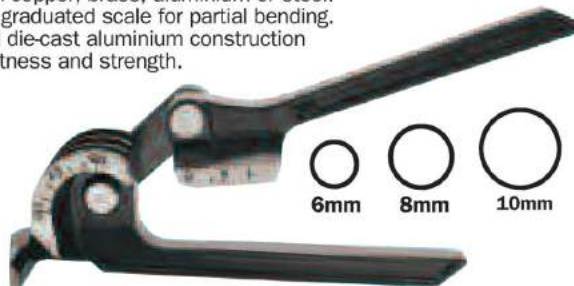

Capacity (mm)	Angle Range	Weight each	Order Code KEN-588
6, 8 & 10	0 - 90°	430g	-6100K

PIPE BENDERS

**GROUP
588**


Industrial Chain Pipe Cutter

Cuts wall pipe (welded and seamless) up to 6mm thick. The grip action eliminates hand gripping effort to ensure perfect tracking.



Capacity	Overall Length	Weight each	Order Code KEN-588
20 - 115mm	250mm	800g	-5120K

Capillary Tube Cutter

CTP1

These cutters are designed to cut annealed capillary tubing cleanly and easily without flattening or constricting the tubing.



Overall Length	Weight each	Order Code KEN-588
130mm	65g	-4660K

4-in-1 Micro Pipe Bender


High tensile steel with rivetted carbon steel. PVC grips. Carbon steel guides. Quick change aluminium formers. Bends copper and steel pipes. For pipe sizes 4.75, 6, 8 and 10mm.



Capacity	Weight each	Order Code KEN-588
4.75-10mm	565g	-6300K

Multi-Bender Pipe Bender

Precision bending up to 180°. Bends tube without distortion. Formers and guides will accept 12, 15 and 22mm O/D tube. For use in the plumbing, heating, refrigeration and air conditioning industries. Spare formers and guides also available (see table below).



Tube Capacity	Weight each	Order Code KEN-588
12, 15 & 22mm	4.10kg	-6200K


Accessories

Tube Capacity	Weight each	Order Code KEN-588
12/15mm Former Only	172g	-6810K
12/22mm Former Only	321g	-6820K
12mm Guide Only	123g	-6920K
15mm Guide Only	104g	-6940K
22mm Guide Only	287g	-6960K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

KENNEDY Double Flaring Tool & Pipe Cutting Set

Flaring tool for $\frac{3}{16}$ ", $\frac{1}{4}$ ", $\frac{5}{16}$ ", $\frac{3}{8}$ ", $\frac{7}{16}$ ", $\frac{1}{2}$ " and $\frac{5}{8}$ " steel, aluminium and copper pipes. Cutter for $\frac{1}{8}$ " to $1\frac{1}{4}$ " outside diameter pipe. Robust moulded case.

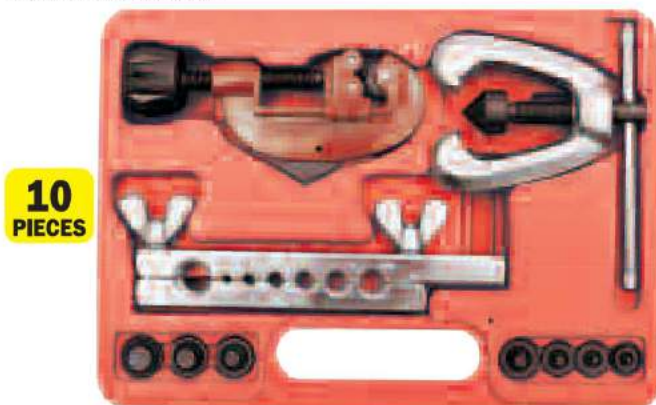

10
PIECES

Capacity	Weight each	Order Code
$\frac{3}{16}$ " - $\frac{5}{8}$ "	1.5kg	KEN-588 -9570K

Double Flaring Tool Set

Manufactured to double flare soft steel, aluminium and copper tubing up to .040" wall thickness producing SAE 45° flares. Heat treated alloy steel swivel is precision ground and chromed to reduce friction. Heat treated drop forged yoke. Each adaptor is clearly stamped with the size for easy identification. Bright lustre plate finish with contrasting black oxide. Will also produce a single flare.

Sizes:
 $\frac{3}{16}$ ", $\frac{1}{4}$ ",
 $\frac{5}{16}$ ", $\frac{3}{8}$ ",
 $\frac{7}{16}$ ", $\frac{1}{2}$ ",
and $\frac{5}{8}$ ".




9
PIECES

Capacity	Weight each	Order Code
$\frac{3}{16}$ " - $\frac{5}{8}$ "	1.03kg	KEN-588 -9550K

KENNEDY Pressure Testing Pump - 860psi

This robust piece of equipment has a 10ltr powder coated tank and comes with a 1.5m $\frac{1}{2}$ " reinforced hose and a pressure gauge graduated in Bar and PSI.

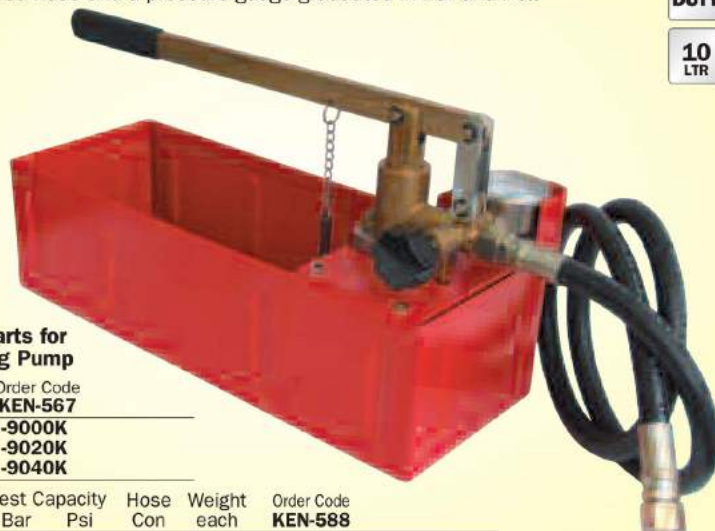


Replacement Parts for Pressure Testing Pump

Description	Order Code
Gauge 60 Bar	KEN-567 -9000K
Hose 60 Bar	-9020K
Seal Kit 60 Bar	-9040K

Product Number	Tank Cap.	Test Capacity Bar	Capacity Psi	Hose Con	Weight each	Order Code
PTP060	10ltr	60	860	$\frac{1}{2}$ BSP	9kg	KEN-588 -8700K

Tube Cutting & Bending Set

Contains flaring press, 45° spreader, 30mm capacity tube cutter, tube springs 14, 18, 16 and 20mm diameter. Robust moulded case.

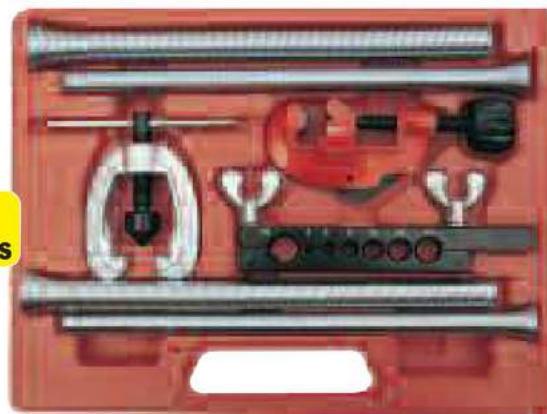


7
PIECES

Capacity	Weight each	Order Code
$\frac{3}{16}$ " - $\frac{5}{8}$ "	2.3kg	KEN-588 -9600K

Folding Double Flaring Tool Set

Suitable for use on copper pipe. Compact folding design. Robust moulded case.

Single 45° flares: $\frac{3}{16}$ " to $\frac{5}{8}$ ". Double flares: $\frac{3}{16}$ " to $\frac{1}{2}$ ". Cutter: $\frac{1}{8}$ " to $1\frac{1}{4}$ ". Deburrer: $\frac{1}{8}$ " to $1\frac{1}{8}$ " internal and external.

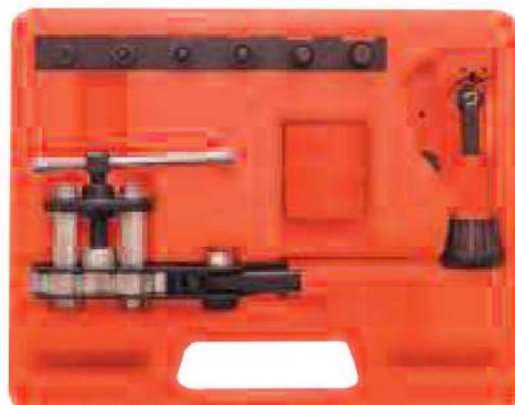

4
PIECES

Capacity	Weight each	Order Code
$\frac{3}{16}$ " - $\frac{5}{8}$ "	2.5kg	KEN-588 -9620K



HEAVY
DUTY

10
LTR

5-Blade Pipe Crimper

With compound action and self-opening jaws, this 5-blade pipe crimper provides accurate indentations in round duct and stove pipe.

It has soft grip handles for comfort and rust resistant blades.



Overall Length	Weight each	Order Code
250mm	550g	KEN-588 -4680K

All-in-1 Swaging Punch

Designed to make a tube connection without a fitting, this all-in-one swaging punch gives you one solder to join, reducing solder time by half. It has a nickel-chrome finish and is heat treated for durability.

Sizes: $\frac{1}{4}$ ", $\frac{5}{16}$ ", $\frac{3}{8}$ ", $\frac{1}{2}$ ", $\frac{5}{8}$ "



Order Code
KEN-588 -9840K

Strong-arm ratchet threading set complete with 1/2", 3/4" and 1" quick change dies. Manufactured to the highest quality with comfortable 2-part handle to give greater leverage. Complete with tough moulded carry case.



Capacity	Weight each	Order Code KEN-588
1/2" - 1"	4.5kg	-8800K

Accessories		
Description	Weight each	Order Code KEN-588
Head 1/2" BSPT	660g	-8820K
3/4" BSPT	584g	-8830K
1" BSPT	839g	-8840K
Die 1/2" BSPT	69g	-8920K
3/4" BSPT	72g	-8930K
1" BSPT	132g	-8940K
Ratchet	1.5kg	-8980K

Pipe Vices

Used for repetitive tasks on pipework. The frame of the pipe vice is made from cast iron with jaws made from hardened tool grade alloy steel with a corrosion resistant coating. The top jaw of the pipe vice is held in position with a hook which automatically engages when the vice is closed. The stand is fitted with an integral tool tray, wide angled legs give greater stability and the folding design provides easy storage and transportation.


**Group
445**


Pipe Vice Only

Product Number	Capacity (mm)	Weight each	Order Code KEN-588
VP055	8-55	4.50kg	-8020K
VP085	10-85	6.70kg	-8040K
VP100	15-100	10.3kg	-8060K

Pipe Vice & Stand

Product Number	Capacity (mm)	Weight each	Order Code KEN-588
VPS055	8-55	24.6kg	-8220K
VPS085	10-85	31.6kg	-8240K

Stand Only

Product Number	To Suit (mm)	Weight each	Order Code KEN-588
TTS055	55	20.1kg	-8520K
TTS085	85	24.9kg	-8540K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

Jaws are serrated in the opposite direction to ensure a secure grip. Used mainly in the plumbing industry for gripping pipes and nuts. Cast iron frame, drop forged handles and jaws. All moving parts are heat treated. Conform with **BS 3594: Part 1**.

Standard Duty - For most general-purpose applications.



Length (mm)	Capacity (mm)	Weight per 6	Order Code KEN-588
205 (8")	27	1.70kg	-2080K
255 (10")	35	3.30kg	-2100K
305 (12")	43	4.40kg	-2120K
355 (14")	50	6.50kg	-2140K
455 (18")	60	10.10kg	-2180K
600 (24")	76	24.00kg	-2240K
900 (36")	102	29.20kg	-2360K

Heavy Duty - For more industrial applications.



Length (mm)	Capacity (mm)	Weight per 6	Order Code KEN-588
205 (8")	27	2.60kg	-3080K
255 (10")	35	5.00kg	-3100K
305 (12")	43	7.50kg	-3120K
355 (14")	50	10.00kg	-3140K
455 (18")	60	16.10kg	-3180K
600 (24")	76	25.70kg	-3240K
900 (36")	102	30.70kg	-3360K
1200 (48")	140	94.80kg	-3480K

Aluminium Pipe Wrenches

Lightweight aluminium alloy handles. As robust as heavy duty cast iron wrenches.



Length (mm)	Capacity (mm)	Weight per 6	Order Code KEN-588
200 (8")	27	1.65kg	-3680K
255 (10")	35	3.20kg	-3700K
305 (12")	43	4.70kg	-3720K
355 (14")	50	6.25kg	-3740K
455 (18")	60	9.90kg	-3780K
600 (24")	80	11.20kg	-3840K
900 (36")	102	14.00kg	-3860K
1200 (48")	140	35.00kg	-3880K

Aluminium Offset Pipe Wrench

Handle made of extremely lightweight aluminium which is as robust as heavy-duty cast iron. Jaw opening sits parallel to the handle making it ideal for overhead applications. Narrow jaw head makes it easier to use within tight areas.



Length (mm)	Capacity (mm)	Weight each	Order Code KEN-588
350 (14")	60	950g	-1640K

Swedish Pattern Pipe Wrenches

Narrow design for confined areas, used for gripping pipe and nuts. Forged chrome vanadium heat treated steel. Knurled adjusting nut with guiding reinforcement on handle. Conform to **DIN 5234**.

90° Type



Length (mm)	Max. Pipe Capacity (mm)	Weight each	Order Code KEN-588
300 (12")	25 (1")	0.76kg	-4120K
400 (16")	38 (1½")	1.40kg	-4160K
560 (22")	50 (2")	2.50kg	-4220K

'S' Type

'S' shaped jaws grip at three points to ensure a maximum grip.



Length (mm)	Max. Pipe Capacity (mm)	Weight each	Order Code KEN-588
225 (9")	13 (½")	0.40kg	-4290K
300 (12")	25 (1")	0.85kg	-4320K
405 (16")	38 (1½")	1.45kg	-4360K
530 (21")	50 (2")	2.45kg	-4410K



KENNEDY Adjustable Pipe Wrenches

All-purpose wrenches with precision milled and hardened teeth which grips the workpiece tighter the more pressure is applied. Pressed steel handles with high carbon steel profiled jaws.

Jaw Adjustment:

(7") 175mm: 1.5 - 38mm ($\frac{1}{16}$ " - $1\frac{1}{2}$ ").

(9") 225mm: 3.0 - 64mm ($\frac{1}{8}$ " - $2\frac{1}{2}$ ").

(12") 300mm: 6.0 - 75mm ($\frac{1}{4}$ " - 3").



Thumb Adjustment	Length (mm)	Weight each	Order Code KEN-588
No	175 (7")	300g	-2710K
	225 (9")	600g	-2720K
	300 (12")	1000g	-2730K
Yes	175 (7")	300g	-2760K
	225 (9")	600g	-2770K
	300 (12")	1000g	-2780K

SENATOR Heavy-Duty Wrenches

Heavy-duty pattern. Drop forged, single piece body.



Length (mm)	Weight each	Order Code SEN-588
200 (8")	0.40kg	-5080K
250 (10")	0.67kg	-5100K
300 (12")	1.00kg	-5120K
350 (14")	1.30kg	-5140K
450 (18")	2.00kg	-5180K
600 (24")	3.50kg	-5240K
900 (36")	5.90kg	-5360K
1200 (48")	16.00kg	-5480K

Speed Wrench Set

Contains two multi-purpose self-adjusting wrenches 200mm (8"), maximum capacity 25mm and 300mm (12"), maximum capacity 35mm. Can be used on pipes, nuts and bolts and will also grip rounded nuts. Manufactured from fully chrome-plated drop forged steel.



2
PIECES



Capacity	Weight each	Order Code SEN-588
25mm & 35mm	925g	-9010K

KENNEDY 9-in-1 Universal Key Wrench

Can be used on most technical locking systems in electrical engineering, supply of gas, water, air conditioning and ventilation systems.


5, 6, 7, 8mm

7, 8, 9mm

Daimler-Benz

6mm


3-5mm

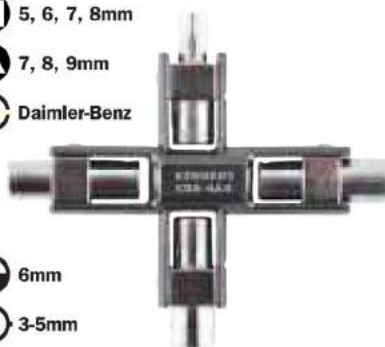

Order Code
KEN-588
-4640K

Multi Key - 4-Way

For gas, water and electric meter boxes, air conditioning units, stop valves, mains consoles etc., central heating pump cocks, some radiator valves and drain off valves.



Weight each
75g
Order Code
KEN-588
-6060K

Radiator Key

Square opening brass key for use on domestic radiator bleed screws with easy to turn clock key type handle for releasing air from water filled radiators.



Weight each
10g
Order Code
KEN-588
-6070K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

KENNEDY
QUALITY INDUSTRIAL TOOLING

**Heavy Duty Adjustable
Twin Roller Stand**

Ideal for supporting long and heavy duty pipe and timber. Adjustable feet. Lock-knob to securely lock-in height settings. Cast iron base with levelling pads for stability. Adjustable height 29" (736mm) to 43" (1092mm), 1 3/8" (35mm) diameter x 6" (150mm) width with spring-loaded axle. Adjustable roller stands with double rollers forming vee groove for added stability allowing easy rotation and feed of up to 7" (180mm) diameter pipe or timber.



Weight
each
6.20kg

Order Code
KEN-588
-9030K

Heavy Duty Self-Levelling Single Roller Stand

HRS020

Heavy duty all-steel welded construction. Unique levelling pads for uneven floors. Adequately supports up to 100kg. Legs fold flat for easy storage and transportation. Pre-assembled and ready to use. Height adjustment from 758 to 1197mm. **Bearing roller:** 51mm x 284mm.




Group
445

Weight
each
8kg

Order Code
KEN-588
-9020K

Fibre Grips

Fibre-faced aluminium vice jaws for use with copper, aluminium, brass and wooden workpieces to prevent marking of work surface. Supplied in pairs.

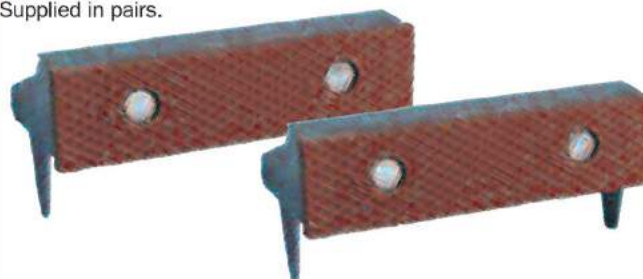

Width (mm)	Weight each	Order Code KEN-589
76 (3")	165g	-0300K
90 (3 1/2")	180g	-0350K
100 (4")	180g	-0400K
110 (4 1/2")	230g	-0420K
115 (4 1/2")	245g	-0450K
127 (5")	245g	-0500K
133 (5 1/4")	260g	-0520K
150 (6")	280g	-0600K

Magnetic Vice Jaws


Suitable for all steel and iron vices - engineers, fitters, machine. Quick and easy to fit and remove.

Profiled Aluminium



Width (mm)	Weight each	Order Code KEN-589
75 (3")	125g	-1300K
100 (4")	165g	-1400K
125 (5")	210g	-1500K
150 (6")	250g	-1600K

Aluminium Jaw with a Fibre Face

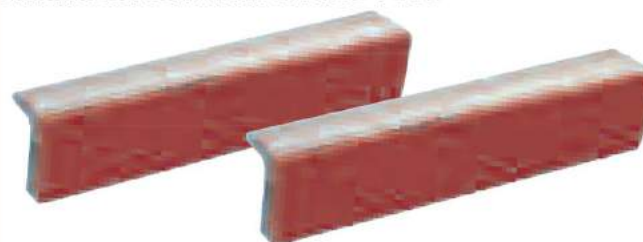

Width (mm)	Weight each	Order Code KEN-589
75 (3")	115g	-2300K
100 (4")	160g	-2400K
125 (5")	195g	-2500K
150 (6")	235g	-2600K

Aluminium Jaw with a Rubber Face




Width (mm)	Weight each	Order Code KEN-589
75 (3")	120g	-3300K
100 (4")	160g	-3400K
125 (5")	210g	-3500K
150 (6")	250g	-3600K

Manufactured from drop forged carbon steel with hardened and precision ground blades which can be re-sharpened.

Standard Type

A traditional design, suitable for the general-purpose cutting of sheet metal in a wide range of materials such as copper, aluminium and mild steel.



Length (mm)	Weight per 6	Order Code KEN-591
200 (8")	1.90kg	-1080K
250 (10")	2.90kg	-1100K
300 (12")	4.00kg	-1120K
360 (14")	5.10kg	-1140K

2 Piece Standard Type Tinsnips Set

Contents (mm)	Weight each	Order Code KEN-591
1 off each 200 (8") & 300mm (12")	910g	-1200K

Heavy Duty Right Hand Universal Snip

The cranked design allows for extra leverage to be safely applied. Ideal for the more demanding cutting application. PVC dipped handle.

Straight Blade

Universal cutting.



Length (mm)	Weight per 6	Order Code KEN-591
250 (10")	3.95kg	-1950K

Cranked Blade Heavy-Duty Snips

The cranked design allows for extra leverage to be safely applied. Ideal for the more demanding cutting application. PVC dipped handle.

Right Hand

Designed to cut straight or to the right, leaving waste material to the left of the blade.



Length (mm)	Weight per 6	Order Code KEN-591
280 (11")	3.40kg	-1690K
360 (14")	5.60kg	-1700K

Left Hand

Designed to cut straight or to the left leaving waste material to the right of the blade.



Length (mm)	Weight per 6	Order Code KEN-591
280 (11")	3.40kg	-1670K

SHEARS & SNIPS
**GROUP
591**

Jeweller's Snips

Short bladed tinsnips giving precise control on intricate workpieces, ideal for jewellers', silversmiths' and model makers.

Straight Cutting

Curved Cutting


Type	Length (mm)	Weight per 6	Order Code KEN-591
Straight	180 (7")	1.30kg	-1550K
Curved	180 (7")	1.30kg	-1560K

Multi-Purpose Cutters

For cutting cardboard, leather, rope, cord, wire, paper & many other materials. Precision ground & hardened stainless steel blades - HRC 50-54 - with one serrated cutting edge to reduce slipping. Lightweight polypropylene handles with spring loaded action. Easy reach safety thumb lock, convenient for right & left hand users.

Cutting length:

Straight: 50mm (2").

Offset: 38mm (1½").



Straight

new



Offset

Type	Length (mm)	Weight each	Order Code KEN-591
Straight	203 (8")	180g	-2360K
Offset	190 (7½")	150g	-3120K

SENATOR
QUALITY TOOLING
**Sheet
Metal Nibbler**


For cutting sheet materials without bending or distorting, metal up to 1.2mm (18 gauge) and plastic up to 2mm (14 gauge). Positive spring loaded action enables the cutter to be used single-handed.

Replaceable molybdenum front blade.

Side jaws for wire cutting.

Safety jaw lock.

Overall length: 250mm.



Length (mm)	Weight each	Order Code SEN-591
250 (10")	505g	-8090K
Replacement Blade	25g	-8095K

General-Purpose Straight Blade Tinsnips

A traditional drop forged carbon steel design with induction hardened and ground blades. Suitable for the general purpose cutting of sheet metal in a wide range of materials such as copper, aluminum and mild steel.



Length (mm)	Weight each	Order Code SEN-591
250 (10")	330g	-1100K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

GROUP
591/592

SHEARS & SNIPS/BOLT & CABLE CUTTERS

KENNEDY
QUALITY INDUSTRIAL TOOLING

**Compound Action
Aviation Snips**

Drop forged chrome vanadium ground blades (54 - 58HRC). The double fulcrum compound action amplifies the pressure applied for easier cutting of up to 1.2mm cold rolled steel sheet. Spring loaded, self-opening action for fast, effortless feed and single-handed operation. Anti-slip guards for extra safety. Thumb lock ensures the jaws stay closed when not in use. For use on mild steel and other non-ferrous materials.

Left Hand or Right Hand Cut
Cut from tight curve to straight.



Type	Length (mm)	Weight per 6	Order Code KEN-591
Right Hand	270 (10½")	2.40kg	-2170K
Left Hand	270 (10½")	2.40kg	-2160K

3 Piece Set Contents:

1x pair 250mm (10") right hand aviation snips 591-217,
1x pair 250mm (10") left hand aviation snips 591-216,
1x pair 250mm (10") straight aviation snips 591-218.



**3
PIECES**



Weight each	Order Code KEN-591
1.22kg	-2240K

Light Duty Cable Cutters

For cutting copper cable, plastic pipe, wooden dowels, rope cord and similar materials up to 10mm diameter. Precision ground and hardened stainless steel blades - 50~54HRC. Lightweight polypropylene handles with spring-loaded action, easy reach thumb catch convenient for right and left hand users.



Cutting Capacity	Length (mm)	Weight each	Order Code KEN-558
10mm	165 (6½")	130g	-5640K

Straight Cut

Cuts straight, left or right. Self-opening action for fast, effortless feed, with a built-in convenient, protective safety latch.



Length (mm)	Weight per 6	Order Code KEN-591
270 (10½")	2.50kg	-2180K

Offset Cut (Heavy Duty)

The offset blades keep hands clear of metal. Spring-action for fast, effortless feed. Non-slip, textured grips and safety latch for superior control and a handy hang-up hole.



Type	Length (mm)	Weight per 6	Order Code KEN-591
Right Hand	250 (9¾")	2.40kg	-2150K
Left Hand	250 (9¾")	2.40kg	-2140K

Mini Bolt Cutters

Mini Cutters - Clipper Cut

Manufactured from forged hardened steel, with spring return, allowing single-handed use. Compound action magnifies the pressure applied to the handle. Ensures a concentration of force between the jaws. Non-slip moulded plastic grip. Available with straight and bent jaws. For low tensile materials. Clipper cut.



Jaw Type	Overall Length (mm)	Cutting Capacity 735N/mm² (45 tons/in²)	Weight each	Order Code KEN-592
Straight	200 (8")	3mm (¼")	0.30kg	-0080K
Bent	200 (8")	3mm (¼")	0.30kg	-0090K

KENNEDY QUALITY INDUSTRIAL TOOLING

Replacement Jaws

Centre Cut Jaws

To efficiently cut high tensile materials by directing the force being applied into a small area. For use on non-ferrous rods and bars, mild steel bolts etc.



Low Tensile Bolt Cutters - Centre Cut

Drop forged hardened carbon steel jaws suitable for round and flat sections. With adjustable arms and cushion grips. Tubular handles for maximum strength combined with low weight.



Length (mm)	Capacity 15° HRC	Capacity 40° HRC	Order Code KEN-592
Low Tensile Cutters			
300 (12")	5mm	4mm	-3520K
350 (14")	7mm	5mm	-3540K
450 (18")	8mm	6mm	-3560K
600 (24")	10mm	8mm	-3580K
750 (30")	13mm	10mm	-3600K
900 (36")	14mm	12mm	-3620K

High Tensile Bolt Cutters

Drop forged hardened chrome vanadium steel. Ideal for cutting both flat and round section steels. Hardened carbon steel jaws. Tubular steel handles with cushion grip for maximum operator comfort. Conform to **DIN 2076**.



Cut Type	Overall Length (mm)	735N/mm ² (45 tons/in ²)	1570N/mm ² (100 tons/in ²)	Weight each	Order Code KEN-592
Centre	1070 (42")	15mm (5/8")	10mm (3/8")	8.30kg	-2420K
	760 (30")	13mm (1/2")	8mm (5/16")	4.00kg	-4200K
	900 (36")	14mm (5/8")	9mm (3/8")	5.20kg	-4220K

To Suit (mm)	Weight each	Order Code KEN-567
To Suit Low Tensile Cutters		
300 (12")	260g	-2920K
360 (14")	380g	-2940K
460 (18")	590g	-2960K
600 (24")	850g	-2980K
760 (30")	1100g	-2990K
900 (36")	2300g	-3000K
To Suit High Tensile Cutters		
760 (30")	1500g	-3490K
900 (36")	2300g	-3500K
1070 (42")	3100g	-3510K

Heavy Duty Cable Cutters

For use when cutting aluminium and copper cable, using a slicing action. Manufactured from forged steel with PVC dipped handles.


Capacity: 60mm².



Length (mm)	Weight each	Order Code KEN-558
250 (10")	516g	-8220K

Lever-Type Cable Cutter

These cable cutters have heat treated cutting edges and are designed to cut copper/ aluminium cables with minimal distortion. The soft grip handles are designed for user comfort whilst exerting force.

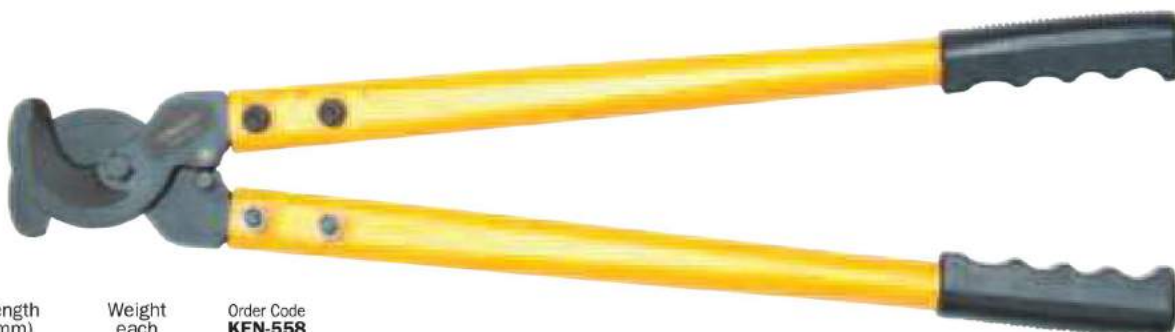

Cutting Capacity	Length (mm)	Weight each	Order Code KEN-558
18mm	380 (15")	3.4kg	-9400K
25mm	550 (22")	3.4kg	-9410K
40mm	820 (32")	3.4kg	-9420K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR



Small Parts Storage Cabinets

Manufactured from heavy gauge steel, painted finish with impact resistant transparent polypropylene drawers, allowing contents to be viewed when the drawer is closed. The lip on the rear of the drawer allows it to be opened fully without falling out. The cabinets can be stacked or mounted to the wall to maximise use of storage space.



Small Parts Storage Cabinets



Manufactured from heavy gauge steel, painted finish with transparent plastic drawers, allows contents to be viewed when the drawer is closed. The lip on the rear of the drawer allows it to be opened fully without falling out. The cabinets can be stacked or mounted to the wall to maximise use of storage space.

**IMPACT
RESISTANT
DRAWERS**

-5300K

-5320K



-5200K

-5220K

-5100K

-5120K

Product Number	Cabinet/ Drawers	Height (mm)	Width (mm)	Depth (mm)	Weight each	Order Code KEN-593
SCS008	Cabinet size 8 Drawers @	282 59	306 140	155 140	1.50kg	-5100K
SCS025	Cabinet size 25 Drawers @	238 36.5	306 54	155 140	2.00kg	-5120K
SCM016	Cabinet size 16 Drawers @	551 59	306 140	155 140	2.80kg	-5200K
SCS060	Cabinet size 60 Drawers @	551 36.5	306 54	155 140	4.50kg	-5220K
SCC036	Cabinet size 30 Drawers @	551 36.5	306 54	155 140	4.50kg	-5300K
SCC048	4 Drawers @	59	140	140	4.20kg	-5320K
	2 Drawers @	59	280	140		
	Cabinet size 45 Drawers @	551 36.5	306 54	155 140		
	2 Drawers @	59	140	140		
	1 Drawers @	59	280	140		

Drawers to Suit

Drawer Size	Height (mm)	Width (mm)	Depth (mm)	Weight each	Order Code KEN-593
Small	36.5	54	140	24g	-9600K
Medium	59	140	140	65g	-9620K
Large	59	280	140	154g	-9640K

Dividers to Suit

Drawer Size	Weight each	Order Code KEN-593
Small 50 x 29mm	19g	-9700K
Medium/Large 50 x 133mm	85g	-9720K

-5300K

-5320K



-5200K

-5220K

-5100K

-5120K

Product Number	Cabinet/ Drawers	Height (mm)	Width (mm)	Depth (mm)	Weight each	Order Code SEN-593
SCM008	Cabinet size 8 Drawers @	282 59	306 140	155 140	1.50kg	-5100K
SCS025	Cabinet size 25 Drawers @	238 36.5	306 54	155 140	2.00kg	-5120K
SCM016	Cabinet size 16 Drawers @	551 59	306 140	155 140	2.80kg	-5200K
SCS060	Cabinet size 60 Drawers @	551 36.5	306 54	155 140	4.50kg	-5220K
SCC036	Cabinet size 30 Drawers @	551 36.5	306 54	155 140	4.50kg	-5300K
SCC048	4 Drawers @	59	140	140	4.20kg	-5320K
	2 Drawers @	59	280	140		
	Cabinet size 45 Drawers @	551 36.5	306 54	155 140		
	2 Drawers @	59	140	140		
	1 Drawers @	59	280	140		

Drawers to Suit

Drawer Size	Height (mm)	Width (mm)	Depth (mm)	Weight each	Order Code SEN-593
Small	36.5	54	140	13g	-9600K
Medium	59	140	140	80g	-9620K
Large	59	280	140	192g	-9640K

Dividers to Suit

Drawer Size	Weight each	Order Code SEN-593
Small 50 x 29mm	21g	-9700K
Medium/Large 50 x 133mm	104g	-9720K

Robust stacking unit for containing four lockable organiser cases, which lift and slide out. The expandable system allows units to be attached on top or side by side. Cases have translucent lid for selecting contents and multi-positional compartment separators. Used for storing up to four service cases.

Maximum load: 6kg.

It is recommended that no more than three organisers should be stacked at one time.



Height (mm)	Width (mm)	Depth (mm)	Order Code KEN-593
425	350	375	-2380K

Professional Service Case

Suitable for transporting and storing smaller items. Manufactured from hi-density industrial strength plastic with opaque lid for viewing contents. Slide clasp-locking mechanism to prevent opening while in transit/storage. Lid and base feature two aligning padlock holes to accept padlocks with shackle diameters up to 5.8mm. The lids have three hinges for strength and durability. Eight fixed compartments supplied with dividers to make up to 16 sections.



Height (mm)	Width (mm)	Depth (mm)	Order Code KEN-593
380	60	335	-2400K

10-Compartment Storage Trays

Made from tough polypropylene. Service cases have 10 equal compartments. Lids have positive catches and are semi-transparent to view their contents.



-6040K

Overall Length	Overall Width	Overall Depth	Weight each	Order Code KEN-593
240mm	178mm	36mm	200g	-6000K
200mm	130mm	45mm	180g	-6040K

SERVICE CASES

**GROUP
593**



Organiser with Polycarbonate Lid

Reinforced body for added strength and durability. Includes 12 storage bins and 2 large and 9 small dividers. Lid interlocks with inner dividers to prevent movement of parts between compartments and is transparent to enable contents to be viewed at a glance.



Height (mm)	Width (mm)	Depth (mm)	Order Code KEN-593
110	400	389	-2410K

4-Drawer Parts Cabinet

Manufactured from hi-impact co-polymer polypropylene with opaque drawers for viewing contents. Three section top compartment with opaque lid and moulded snap clasps to prevent accidental opening. Each internal sliding transparent drawer features three removable dividers and locking mechanism to prevent the drawer opening whilst in transit. Recessed top carry handle and locating lugs allows stacking of multiple cabinets.



Height (mm)	Width (mm)	Depth (mm)	Order Code KEN-593
390	200	340	-1760K