

## ATLAS Light Duty Pressed Steel Castors

A range of pressed steel castors for general light duty industrial or institutional applications. Available top plate or bolt hole fixing and with the option of total-stop brake.

Expanding adaptors for tube fixing are also available as an option with bolt hole castors (see page 1782).



## CASTORS

GROUP  
945

	Plate Fixing				Bolt Hole Fixing	
Wheel Diameter	50	75	100	125	To Suit	To Suit
Overall Height	69.5	100	134	155.5	68	131.5
Plate Size	60 x 60	60 x 60	76 x 76	76 x 76	M6	M10
Fixing Hole Centres*	38 x 38 & 48 x 48	38 x 38 & 48 x 48	52 x 52 & 58 x 58	52 x 52 & 58 x 58	M6	M10
To Suit	M6	M6	M8	M8	M6	M12

\* Slotted fixing hole, choice of fixing hole centres

### Polypropylene - Plain Bearing

Cost effective hard wearing polypropylene wheeled castor with a wide range of general applications and ease of movement.

Swivel Top Plate



Swivel Top Plate with Brake



Swivel Bolt Hole



Swivel Bolt Hole with Brake



Wheel Dia. (mm)	Tread Width (mm)	Load Capacity (kg)
50	20	50
75	25	70
100	27	80
125	27	100

Order Code ATL-945
-0210K
-0212K
-0214K
-0216K

Order Code ATL-945
-0200K
-0202K
-0204K
-0206K

Order Code ATL-945
-0280K
-0282K
-0284K
-0286K

Order Code ATL-945
-0270K
-0272K
-0274K
-0276K

### Rubber Non-marking Tyred Wheel with Nylon Centre - Plain Bearing

Rubber non-marking tyred castor that slightly cushion the ride and protect flooring.

Swivel Top Plate



Swivel Top Plate with Brake



Swivel Bolt Hole



Swivel Bolt Hole with Brake



Wheel Dia. (mm)	Tread Width (mm)	Load Capacity (kg)
50	20	50
75	25	70
100	27	80
125	27	100

Order Code ATL-945
-0250K
-0252K
-0254K
-0256K

Order Code ATL-945
-0240K
-0242K
-0244K
-0246K

Order Code ATL-945
-0310K
-0312K
-0314K
-0316K

Order Code ATL-945
-0300K
-0302K
-0304K
-0306K

### Light Duty Twin Wheel Pressed Steel Castors

A range of twin wheel pressed steel castors for general light duty industrial or institutional applications. Available top plate or bolt hole fixing and with the option of total-stop brake.

Expanding adaptors for tube fixing are also available as an option with bolt hole castors (see page 1782)

	Plate Fixing				Bolt Hole Fixing	
Wheel Diameter	50	75	100	125	To Suit	To Suit
Overall Height	71	103	134	155.5	68	131.5
Plate Size	60 x 60	60 x 60	76 x 76	76 x 76	M6	M10
Fixing Hole Centres*	38 x 38 & 48 x 48	38 x 38 & 48 x 48	52 x 52 & 58 x 58	52 x 52 & 58 x 58	M6	M10
To Suit	M6	M6	M8	M8	M6	M12

\* Slotted fixing hole, choice of fixing hole centres

### Polypropylene - Plain Bearing

Cost effective hard wearing polypropylene wheeled castor with a wide range of general applications and ease of movement.

Swivel Top Plate



Swivel Top Plate with Brake



Swivel Bolt Hole



Swivel Bolt Hole with Brake



Wheel Dia. (mm)	Tread Width (mm)	Load Capacity (kg)
50	20 x 2	80
75	25 x 2	100

Order Code ATL-945
-0350K
-0352K

Order Code ATL-945
-0340K
-0342K

Order Code ATL-945
-0410K
-0412K

Order Code ATL-945
-0400K
-0402K

### Rubber Non-marking Tyred Wheel with Nylon Centre - Plain Bearing

Rubber non-marking tyred castor that slightly cushion the ride and protect flooring.

Swivel Top Plate



Swivel Top Plate with Brake



Swivel Bolt Hole



Swivel Bolt Hole with Brake



Wheel Dia. (mm)	Tread Width (mm)	Load Capacity (kg)
50	20 x 2	80
75	25 x 2	100

Order Code ATL-945
-0380K
-0382K

Order Code ATL-945
-0370K
-0372K

Order Code ATL-945
-0440K
-0442K

Order Code ATL-945
-0430K
-0432K







PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR



**ATLAS** Light to Medium Duty  
Pressed Steel Castors


A range of pressed steel castors for general light to medium duty industrial or institutional applications. Available top plate or bolt hole fixing and with the option of total-stop brake.

Expanding adaptors for tube fixing are also available as an option with bolt hole castors (see page 1782).

	Plate Fixing				Bolt Hole Fixing	
						
Wheel Diameter	75	105	105 x 80	105 x 80 & 72 x 52	To Suit	Overall Height
	100	130	105 x 80	105 x 80 & 72 x 52	Fixing Bolt	102
	125	156	105 x 80	105 x 80 & 72 x 52	M8	128
					M8	155
						To Suit
						Fixing Bolt
						M12
						M12

\* Slotted fixing hole, choice of fixing hole centres

**Nylon Wheel - Ball Journal Bearing**

A slightly rounded nylon tyred wheeled castor complete with ball bearing to greatly assist in manoeuvrability.

	Swivel Top Plate	Fixed Top Plate	Swivel Top Plate with Brake	Swivel Bolt Hole	Swivel Bolt Hole with Brake
Wheel Dia. (mm)	75	105	105 x 80	105 x 80 & 72 x 52	To Suit
Tread Width (mm)	30	30	30	30	30
Load Capacity (kg)	100	150	170	100	150
Order Code ATL-945	-0472K	-0462K	-0452K	-0642K	-0632K
	-0474K	-0464K	-0454K	-0644K	-0634K
	-0476K	-0466K	-0456K	-0646K	-0636K

**Grey Thermoplastic Tyred Wheel with Nylon Centre - Ball Journal Bearing**

Grey non-marking thermoplastic rubber tyred wheeled castor complete with ball bearing to assist in manoeuvrability.

	Swivel Top Plate	Fixed Top Plate	Swivel Top Plate with Brake	Swivel Bolt Hole	Swivel Bolt Hole with Brake
Wheel Dia. (mm)	75	105	105 x 80	105 x 80 & 72 x 52	To Suit
Tread Width (mm)	30	30	30	30	30
Load Capacity (kg)	80	100	120	80	100
Order Code ATL-945	-0512K	-0502K	-0492K	-0682K	-0672K
	-0514K	-0504K	-0494K	-0684K	-0674K
	-0516K	-0506K	-0496K	-0686K	-0676K

**Blue Rubber Tyred Wheel with Nylon Centre - Ball Journal Bearing**

Blue non-marking elastic rubber tyred wheeled castor complete with ball bearing.

	Swivel Top Plate	Fixed Top Plate	Swivel Top Plate with Brake	Swivel Bolt Hole	Swivel Bolt Hole with Brake
Wheel Dia. (mm)	75	105	105 x 80	105 x 80 & 72 x 52	To Suit
Tread Width (mm)	30	30	30	30	30
Load Capacity (kg)	100	120	140	100	120
Order Code ATL-945	-0562K	-0552K	-0542K	-0712K	-0702K
	-0564K	-0554K	-0544K	-0714K	-0704K
	-0566K	-0556K	-0546K	-0716K	-0706K

**Polyurethane Tyred Wheel with Nylon Centre - Ball Journal Bearing**

Hard wearing polyurethane tyred wheeled castors with ball bearing to give a low rolling resistance.

	Swivel Top Plate	Fixed Top Plate	Swivel Top Plate with Brake	Swivel Bolt Hole	Swivel Bolt Hole with Brake
Wheel Dia. (mm)	75	105	105 x 80	105 x 80 & 72 x 52	To Suit
Tread Width (mm)	30	30	30	30	30
Load Capacity (kg)	100	120	140	100	120
Order Code ATL-945	-0612K	-0602K	-0592K	-0752K	-0742K
	-0614K	-0604K	-0594K	-0754K	-0744K
	-0616K	-0606K	-0596K	-0756K	-0746K



# **ATLAS Medium Duty Pressed Steel Castors**

A range of pressed steel castors for general medium duty industrial applications. Available top plate or bolt hole fixing and with the option of total-stop brake.



## **CASTORS**

**GROUP 945**

Plate Fixing					Bolt Hole Fixing	
Wheel Diameter	Overall Height	Plate Size		Fixing Hole Centres*	To Suit Fixing Bolt	Overall Height
		Swivel	Fixed			
80	105	105 x 80	102 x 87	80 x 60 & 77 x 60	M8	105
100	128	105 x 80	102 x 87	80 x 60 & 77 x 60	M8	128
125	155	105 x 80	102 x 87	80 x 60 & 77 x 60	M8	155
160	195	135 x 105	135 x 114	105 x 80 & 105 x 75	M10	195
200	235	135 x 105	135 x 114	105 x 80 & 105 x 75	M10	235

\* Slotted fixing hole, choice of fixing hole centres

**Nylon Wheel - Roller Bearing**  
Versatile and widely used nylon wheeled castors complete with needle roller bearing wheels.

**Swivel Top Plate**



**Fixed Top Plate**



**Swivel Top Plate with Brake**



**Swivel Bolt Hole**



**Swivel Bolt Hole with Brake**



Wheel Dia. (mm)	Tread Width (mm)	Load Capacity (kg)	Order Code ATL-945	Order Code ATL-945	Order Code ATL-945	Order Code ATL-945	Order Code ATL-945
80	32	150	-0846K	-0826K	-0806K	-1746K	-1726K
100	32	150	-0848K	-0828K	-0808K	-1748K	-1728K
125	32	200	-0850K	-0830K	-0810K	-1750K	-1730K
160	45	350	-0852K	-0832K	-0812K	-1752K	-1732K
200	50	400	-0854K	-0834K	-0814K	-1754K	-1734K

**Black Rubber Tyred Wheel with Polypropylene Centre - Roller Bearing**

Nylon centred Industrial black rubber tyred wheeled castors complete with needle roller bearing wheels.

**Swivel Top Plate**



**Fixed Top Plate**



**Swivel Top Plate with Brake**



**Swivel Bolt Hole**



**Swivel Bolt Hole with Brake**



Wheel Dia. (mm)	Tread Width (mm)	Load Capacity (kg)	Order Code ATL-945	Order Code ATL-945	Order Code ATL-945	Order Code ATL-945	Order Code ATL-945
80	30	50	-0926K	-0906K	-0886K	-1806K	-1786K
100	30	70	-0928K	-0908K	-0888K	-1808K	-1788K
125	37	100	-0930K	-0910K	-0890K	-1810K	-1790K
160	40	135	-0932K	-0912K	-0892K	-1812K	-1792K
200	50	205	-0934K	-1304K	-1324K	-1814K	-1794K

**Black Rubber Tyred Wheel with Pressed Steel Centre - Roller Bearing**

Steel centred Industrial black rubber tyred wheeled castors complete with needle roller bearing wheels.

**Swivel Top Plate**



**Fixed Top Plate**



**Swivel Top Plate with Brake**



**Swivel Bolt Hole**



**Swivel Bolt Hole with Brake**



Wheel Dia. (mm)	Tread Width (mm)	Load Capacity (kg)	Order Code ATL-945	Order Code ATL-945	Order Code ATL-945	Order Code ATL-945	Order Code ATL-945
80	30	50	-1446K	-1426K	-1406K	-	-1846K
100	30	70	-1448K	-1428K	-1408K	-1868K	-1848K
125	37	100	-1450K	-1430K	-1410K	-1870K	-1850K
160	40	135	-1452K	-1432K	-1412K	-1872K	-1852K
200	50	205	-1454K	-1434K	-1414K	-1874K	-1854K

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**

777

© 2018

**ATLAS** Medium Duty  
Pressed Steel Castors Continued**Grey Rubber Tyred Wheel  
with Nylon Centre -  
Ball Journal Bearing**

Grey elastic rubber tyred wheeled castors with ball journal bearing for a smooth movement of equipment.

**Swivel  
Top Plate****Fixed  
Top Plate****Swivel Top Plate  
with Brake****Swivel  
Bolt Hole****Swivel Bolt Hole  
with Brake**

Wheel Dia. (mm)	Tread Width (mm)	Load Capacity (kg)	Order Code ATL-945	Order Code ATL-945	Order Code ATL-945	Order Code ATL-945	Order Code ATL-945
80	32	70	-1526K	-1506K	-1486K	-1916K	-1896K
100	35	125	-1528K	-1508K	-1488K	-1918K	-1898K
125	40	160	-1530K	-1510K	-1490K	-1920K	-1900K
160	45	200	-1532K	-1512K	-1492K	-1922K	-1902K
200	45	200	-1534K	-1514K	-1494K	-1924K	-1904K

**Blue Rubber Tyred Wheel  
with Nylon Centre -  
Ball Journal Bearing**

Blue elastic rubber tyred wheeled castors with ball journal bearing for a smooth movement of equipment.

**Swivel  
Top Plate****Fixed  
Top Plate****Swivel Top Plate  
with Brake****Swivel  
Bolt Hole****Swivel Bolt Hole  
with Brake**

Wheel Dia. (mm)	Tread Width (mm)	Load Capacity (kg)	Order Code ATL-945	Order Code ATL-945	Order Code ATL-945	Order Code ATL-945	Order Code ATL-945
80	32	70	-1606K	-1586K	-1566K	-1966K	-1946K
100	32	125	-1608K	-1588K	-1568K	-1968K	-1948K
125	32	160	-1612K	-1590K	-1570K	-1970K	-1950K
160	45	200	-1614K	-1592K	-1572K	-1972K	-1952K
200	45	200	-1616K	-1594K	-1574K	-1974K	-1954K

**Red Polyurethane Tyred Wheel  
with Nylon Centre - Roller  
Bearing**

Durable polyurethane tyred wheeled castors, non marking and protective of flooring.

**Swivel  
Top Plate****Fixed  
Top Plate****Swivel Top Plate  
with Brake****Swivel  
Bolt Hole****Swivel Bolt Hole  
with Brake**

Wheel Dia. (mm)	Tread Width (mm)	Load Capacity (kg)	Order Code ATL-945	Order Code ATL-945	Order Code ATL-945	Order Code ATL-945	Order Code ATL-945
80	32	150	-1686K	-1666K	-1646K	-2476K	-2456K
100	32	150	-1688K	-1668K	-1648K	-2478K	-2458K
125	32	200	-1690K	-1670K	-1650K	-2480K	-2460K
160	45	350	-1692K	-1672K	-1652K	-2482K	-2462K
200	50	400	-1694K	-1674K	-1654K	-2484K	-2464K





## ATLAS Heavy Duty Pressed Steel Castors

A range of pressed steel castors for heavy duty industrial applications. Available top plate fixing and with the option of total-stop brake.



## CASTORS

GROUP  
**945**

Plate Fixing				
Wheel Diameter	Overall Height	Plate Size	Fixing Hole Centres*	To Suit Fixing Bolt
100	135	100 x 85	80 x 60	M8
125	166	135 x 110	105 x 80 & 105 x 75	M8
150	189	135 x 110	105 x 80 & 105 x 75	M12
160	216	135 x 110	105 x 80 & 105 x 75	M12
200	251	135 x 110	105 x 80 & 105 x 75	M12

\* Slotted fixing hole where choice of fixing hole centres offered

**Nylon Wheel - Ball Journal Bearing**  
Heavy Duty ball journal bearing Nylon wheeled castors.

Swivel Top Plate



Fixed Top Plate



Swivel Top Plate with Brake



Wheel Dia. (mm)	Tread Width (mm)	Load Capacity (kg)	Order Code ATL-945	Order Code ATL-945	Order Code ATL-945
100	40	300	-6218K	-6198K	-6178K
125	45	400	-6220K	-6200K	-6180K
160	50	500	-6222K	-6202K	-6182K
200	57	800	-6224K	-6204K	-6184K

**Black Rubber Tyred Wheel with Aluminium Centre - Ball Journal Bearing**  
Black rubber tyred wheeled castors with ball journal bearing, suitable for towing applications.

Swivel Top Plate



Fixed Top Plate



Swivel Top Plate with Brake



Wheel Dia. (mm)	Tread Width (mm)	Load Capacity (kg)	Order Code ATL-945	Order Code ATL-945	Order Code ATL-945
100	40	160	-6298K	-6278K	-6258K
125	40	200	-6300K	-6280K	-6260K
160	50	300	-6302K	-6282K	-6262K
200	50	400	-6304K	-6284K	-6264K

**Yellow Polyurethane Tyred Wheel with Aluminium Centre - Ball Journal Bearing**  
Polyurethane tyred wheeled castors with ball journal bearing, suitable for towing applications.

Swivel Top Plate



Fixed Top Plate



Swivel Top Plate with Brake



Wheel Dia. (mm)	Tread Width (mm)	Load Capacity (kg)	Order Code ATL-945	Order Code ATL-945	Order Code ATL-945
100	40	250	-6378K	-6358K	-6338K
125	30	250	-6380K	-6360K	-6340K
160	50	500	-6382K	-6362K	-6342K
200	50	800	-6384K	-6364K	-6344K

**Yellow Polyurethane Tyred Wheel with Cast Iron Centre - Ball Journal Bearing**  
Polyurethane tyred, cast iron centred wheeled castors with ball journal bearing, suitable for towing applications in tough situations.

Swivel Top Plate



Fixed Top Plate



Swivel Top Plate with Brake



Wheel Dia. (mm)	Tread Width (mm)	Load Capacity (kg)	Order Code ATL-945	Order Code ATL-945	Order Code ATL-945
100	40	300	-6458K	-6438K	-6418K
125	40	400	-6460K	-6440K	-6420K
150	40	500	-6462K	-6442K	-6422K
200	50	800	-6464K	-6444K	-6424K



SITE MAINTENANCE



Can't see what you need?  
Other sizes and styles are available...

...contact your local branch or representative for technical advice and further information

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

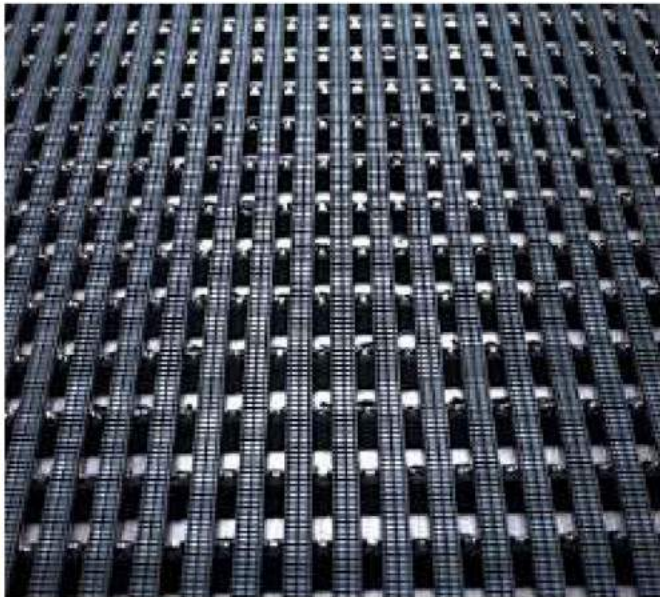
779



**SITESAFE**
**Anti-Slip/Spillage  
Matting**

Manufactured from 100% recycled factory waste. Hard wearing and versatile whilst providing excellent slip resistance. Its two layer tubular construction allows for fast drainage of any water or oils that may be in the workplace.


Colour: black



Type	Dimensions	Order Code SSF-946
Roll	0.5m x 10m	-7160K
	0.75m x 10m	-7170K
	1m x 10m	-7180K
Matt	0.5m x 0.9m	-7190K
	1m x 1.1m	-7200K

**Barefoot Wet Room Matting**

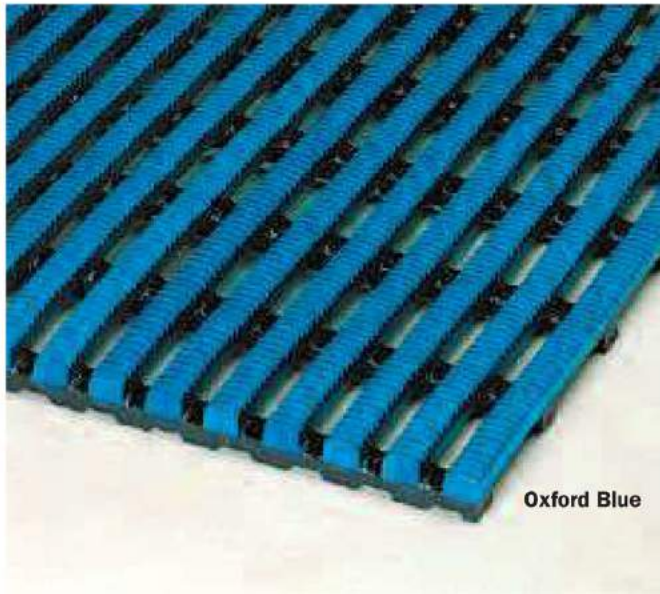Warm, comfortable, self draining safety matting for barefoot applications. The soft embossed surface combined with anti-bacterial and anti-fungal additives and excellent drainage, offers a safe solution for shower rooms, poolside and changing areas.



Oxford Blue

Colour	Dimensions	Order Code SSF-946
Ocean Blue	0.5m x 10m	-7500K
	1m x 10m	-7510K
	1.2m x 10m	-7520K
Oxford Blue	0.5m x 10m	-7530K
	1m x 10m	-7540K
	1.2m x 10m	-7550K
Charcoal Grey	0.5m x 10m	-7560K
	1m x 10m	-7570K
	1.2m x 10m	-7580K

**Anti-Slip Matting**

Light, comfortable and economical matting. Insulates against cold floors, reduces standing fatigue and provides excellent slip resistance. (DIN 51130 R11) Floorline is suitable for areas where occasional spillage may occur.



Colour	Type	Dimensions	Order Code SSF-946
Red	Roll	0.6m x 10m	-7010K
	Roll	0.9m x 10m	-7020K
	Roll	0.6m x 10m	-7050K
Blue	Roll	0.9m x 10m	-7060K
	Mat	0.6m x 0.9m	-7030K
	Mat	0.9m x 1.2m	-7040K
Blue	Mat	0.6m x 0.9m	-7070K
	Mat	0.9m x 1.2m	-7080K

**Ultimate Anti Slip Matting**

The deep tread pattern of Vynagrip offers superior grip, and combined with a high liquid drainage, makes it the ultimate slip resistant matting solution. Vynagrip is resistant to most oils and chemicals making it suitable for the harshest environments.



Colour	Type	Dimensions	Order Code SSF-946
Red	Roll	0.6m x 10m	-7300K
	Roll	0.9m x 10m	-7310K
	Roll	1.2m x 10m	-7320K
Blue	Roll	0.6m x 10m	-7330K
	Roll	0.9m x 10m	-7340K
	Roll	1.2m x 10m	-7350K
Black	Roll	0.6m x 10m	-7360K
	Roll	0.9m x 10m	-7370K
	Roll	1.2m x 10m	-7380K





Standing on a hard floor for prolonged periods without anti-fatigue matting can cause pain and discomfort in the lower legs, feet and back. Fatigue reduces concentration and therefore productivity. Anti-fatigue matting will increase comfort and productivity for workers who stand for long periods and substantially reduces stress, tiredness, aches and pains from standing on hard floors at work. Introducing anti fatigue matting into the workplace can provide staff with a more comfortable environment, which in turn encourages increased efficiency, concentration and productivity.

**Diamond Zone**

Manufactured from extremely hardwearing rubber capable of operating in high temperature environments. Diamond surface provides greater traction with extended wear and can be easily cleaned. Interlocking tile system enables the user to produce any required length. Also offers insulation against cold floors.

**Colour:** black.

**Thickness:** 12.5mm.



Size (mm)	Order Code <b>SSF-946</b>
700 x 800	<b>-2640D</b>

**Work Mat**

Hard-wearing SBR rubber construction. Raised circular surface for superior slip resistance - suitable for wet conditions. Features a moulded bevelled edge to reduce tripping.

Conforms to Slip Resistance Test **EN13552 Category R10.**

**Colour:** black.

**Thickness:** 10mm.



Size (mm)	Order Code <b>SSF-946</b>
800 x 1200	<b>-8459E</b>
900 x 1500	<b>-8460F</b>

**Knee Saver Mat**

Manufactured from a closed cell PVC/nitrile blend. Reduces knee pain and lower back stress caused by regular kneeling, ideal for pain relief during floor fitting.

Resistant to  
oils and  
chemicals.

**Colour:** black.



Size (mm)	Order Code <b>SSF-946</b>
530 x 360 x 25	<b>-4650R</b>

**Ortho Lite**

Offers the user relief from fatigue caused by standing. Insulates against cold concrete floors. Ideal for use in dry environments. Pebble surface provides additional traction.

**Colour:** charcoal.

**Thickness:** 6mm.



Size (mm)	Order Code <b>SSF-946</b>
900 x 1500	<b>-5060F</b>
900 x 1820	<b>-5070H</b>

**Ribbed Mat**

Durable mat, manufactured from hardwearing natural rubber. Effective slip-resistance. Provides insulation from cold concrete floors. Use on workbenches to prevent component damage.

**Colour:** black.

**Thickness:** 3mm.



Size (mm)	Order Code <b>SSF-946</b>
900 x 2500	<b>-6760P</b>

**Entrance Mat**

Scrapes dirt and wipes moisture. Slip resistant PVC backing.

**Colour:** Black.

**Thickness:** 7mm.



Size (metre)	Order Code <b>SSF-946</b>
0.6 x 0.9m	<b>-8706K</b>
0.9 x 1.5m	<b>-8709K</b>

**Bubble Stand Anti Fatigue Mat**

Ideal for dry environments. Bubble surface stimulates constant foot movement to increase blood circulation. Ramped edges for additional safety.

**Colour:** Black.

**Thickness:** 14mm.



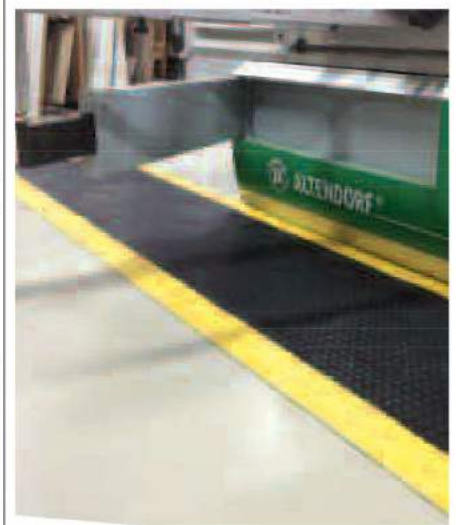
Size (mm)	Order Code <b>SSF-946</b>
0.6 x 0.9m	<b>-8520K</b>
0.9 x 1.2m	<b>-8523K</b>

**Premium Anti Fatigue Mat**

Heavy duty with 'Diamond Tread' top surface. Comfortable foam backing. Manufactured with two yellow borders and ramped edges all round for additional safety.

**Colour:** Black.

**Thickness:** 12.5mm.



Size (mm)	Order Code <b>SSF-946</b>
0.9 x 1.5m	<b>-8716K</b>
0.9 x 3.0m	<b>-8719K</b>



## MATLOCK

Door  
Controls

This comprehensive range of Door Controls feature varying power sized units for many different door applications. They come with a choice of architectural covers which are each available in 26 different plated or colour coated finishes. To help select the correct closer for you, each unit has a listing showing their key features, certification numbers and fire ratings. Plated arms are available on certain units only, and test certificates are available upon request.

**BS EN1154 Classification**

This standard classifies door closers using a six digit coding system. Each digit relates to a particular feature of the product measured against the standards performance requirements.

**Digit (1) - Category of use:**

'3' denotes the unit is for closing doors from at least 105'.  
'4' denotes the unit is for closing doors from 180° open.

**Digit (2) - Durability:**

'8' successfully completed 500,000 test cycles.

**Digit (3) - Test door mass/size:**

Seven grades are identified as shown in the table below (where a closer provides a range of power sizes both the minimum and maximum sizes shall be shown):

Power size	Test door mass	Recommended door leaf width
1	20kg	750mm
2	40kg	850mm
3	60kg	950mm
4	80kg	1100mm
5	100kg	1250mm
6	120kg	1400mm
7	160kg	1600mm

**Digit (4) - Fire behaviour:**

'0' denotes the unit is **NOT** suitable for use on fire/smoke doors.  
'1' denotes the unit **IS** suitable for use on fire/smoke doors.

**Digit (5) - Safety in use:**

'1' all door closer units are required to satisfy the essential requirement of safety in use.

**Digit (6) - Corrosion-resistance:**

'0' - indicates no defined corrosion-resistance,  
'1' - indicates mild corrosion-resistance,  
'2' - indicates a moderate level of corrosion-resistance,  
'3' - indicates high corrosion-resistance,  
'4' - indicates very high corrosion-resistance.

Within this section units have been tested to **BS EN1154**, with many units also having been tested to current Certified testing and **CE** test criteria. Therefore, the six digit classification is shown against each of the varying units, thus indicating their performance and grading under **BS EN1154**.

**Budget Contract Door Closer****Size 3 Mechanism 28730**

Silver finish. **CE** tested. Closing force size 3 (**EN1154**). Maximum door width 950mm. Suitable for doors 40 - 60kg. Adjustable latch action. Fire tested to **BS EN1634-1**. One hour fire rated. Self handing (fits to left or right hinged doors). 180° opening (retains control of door when opened 180°).

Fire tested to **EN1634**: 1½ hours.

Power size: 2 - 4.

Architectural cover: mechanism only or 92 cover.

Latch action: adjustable.

Backcheck: no.

Delayed action: no.

Guarantee: 10 years.



CE	3	8	3	1	1	3
1121	(1)	(2)	(3)	(4)	(5)	(6)

Description	Finish	Order Code
Mechanism only	Silver	<b>-4030K</b>
Covered Unit	Silver	<b>-4040K</b>

**Overhead Door Closer****Size 2 - 4 Mechanism 28932**

Silver or plated finish. **CE** tested. Certifire approved **CF600**. Closing force size 3 - 4 (**EN1154**). Maximum door width 850 - 1100mm. Suitable for doors 40 - 80kg. Fire tested to **BS EN1634**. One hour fire rated. Adjustable check action. Independent on/off latch action. Self handing (fits to left or right hinged doors). 180° opening (retains control of door when opened 180°).

Fire tested to **EN1634**: 2 hours.

Power size: 3 - 4.

Architectural cover: 91.

Check action: adjustable.

Backcheck: yes.

Delayed action: yes.

Guarantee: 10 years.



CE	4	8	4	3	1	1	3
1121	(1)	(2)	(3)	(4)	(5)	(6)	

Description	Finish	Order Code
Covered Unit	Silver	<b>-4010K</b>
Covered Unit	Plated	<b>-4020K</b>

**Concealed Chain Door Closer**

Brass finish. Concealed spring type closer. Spring tension closing force adjustable. Certified to **BS 476 Pt. 22:1987**. ½ hour fire rated. Left or right hand fitting. Suitable for use on doors up to 50kg.



Finish	Order Code
Chrome	<b>-4070K</b>
Brass	<b>-4080K</b>

**Electro-Magnetic Fire Stay**

Silver or plated finish. Electro-magnet holds open fire doors but releases in the event of fire. Closing force size 4 (**EN1155**). Maximum door width 950 - 1100mm. Suitable for doors 60 - 80kg. Adjustable check action. Adjustable latch action. Hold open from 70° - 180°.



3	8	1	1	1	3
(1)	(2)	(3)	(4)	(5)	(6)

Description	Finish	Order Code
Covered Unit	Silver	<b>-4050K</b>
Covered Unit	Plated	<b>-4060K</b>




**MATLOCK**
**Panic  
Hardware**

This panic hardware range of emergency exit devices contains products that are certified to the European **CEN** standards **BS EN179** & **BS EN1125** and offers a design to give optimum safety and security. All products meet with the required standards in today's market. They have an anti-thrust mechanism to protect against attack, carry a ten year manufacturer's guarantee and are two hour fire rated. Standard sized units are suitable for doors up to 2440mm high and 1220mm wide. Special sized vertical shoots, horizontal bars, keeps and pullman catch kits are available on request.

**BS EN1125 Classification**

This is the European standard for Panic Exit Devices. This determines that a Panic device must be fitted where members of the public are present and have no prior knowledge of the exit or hardware.

**BS EN179 Classification**

This is the European standard for Emergency Exit Devices. This determines that in emergency situations occupants will have prior knowledge of the exit and panic situation is unlikely to occur. Each standard is tested and evaluated and a 9 digit code is produced. **BS EN 1125** & **BS EN 179** are harmonised under the Construction Products Directive and products must therefore carry the **CE** mark.

**Push Bar Panic Latch**

Suitable for public areas. Certified for use on fire doors. **CE** marked for safety. Tested to **BS EN 179** and **EN1125**. Two hour fire rated.


**CE**

Finish	Order Code
Silver	<b>MTL-949</b>
	<b>-6010K</b>

**Push Pad Panic Latch**

Suitable for offices, business premises etc. Certified for use on fire doors. **CE** marked for safety. Tested to **BS EN 179** and **EN1125**. Two hour fire rated.


**CE**

Finish	Order Code
Silver	<b>MTL-949</b>
	<b>-6020K</b>

**Outside Access Device**

Suitable for use on fire doors. Supplied with euro cylinder. Three keys included. Two hour fire rated.


**CE**

Finish	Order Code
Silver	<b>MTL-949</b>
	<b>-6040K</b>

**Push Bar Single Panic Bolt**

Suitable for single and double flush fitting doors. Certified for use on fire doors. **CE** marked for safety. Tested to **BS EN 179** and **EN1125**. Two hour fire rated.


**CE**

Finish	Order Code
Silver	<b>MTL-949</b>
	<b>-5990K</b>

**Push Pad Panic Bolt**

Suitable for offices, business premises etc. Certified for use on fire doors. **CE** marked for safety. Tested to **BS EN 179** and **EN1125**. Two hour fire rated.


**CE**

Finish	Order Code
Silver	<b>MTL-949</b>
	<b>-6030K</b>

**Double Panic Bolt Set**

Suitable for rebated double doors. Certified for use on fire doors. **CE** marked for safety. Tested to **BS EN 179** and **EN1125**. Two hour fire rated.


**CE**

Finish	Order Code
Silver	<b>MTL-949</b>
	<b>-6000K</b>

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**





## MATLOCK Digital Door Locks

Digital door locks suitable for: offices, banks, warehouses, laboratories, schools, hospitals, flats, apartments or any restricted areas.

### Features:

Resettable combination.  
Tamperproof latch bolt.  
Weather resistant.  
Simple to fit. Internal and external applications.



Group 820



Available  
with or without  
key override



Body Finish	Key Lock Override	Order Code
Satin Chrome	No	<b>MTL-949</b> -5020K
Satin Chrome	Yes	-5040K

## Night Latch - Traditional

Supplied complete with cylinder, fixings and three keys plus one emergency key.

**70077** Traditional  
Bracket: 60mm.

**70081** Roller Bolt  
Bracket: 60mm.

**70089** Standard  
Bracket: 60mm.



70081 Roller Bolt



70077 Traditional



Model Number	Order Code
70077	<b>MTL-949</b> -9410K
70081	-9500K
70089	-9680K

## Europrofile Cylinder & Turn

70mm (35/35). Satin chrome plate finish.  
Supplied with two keys and fixing screw.



Size	Order Code
35mm/35mm	<b>MTL-949</b> -4430K

## Europrofile Double Cylinder

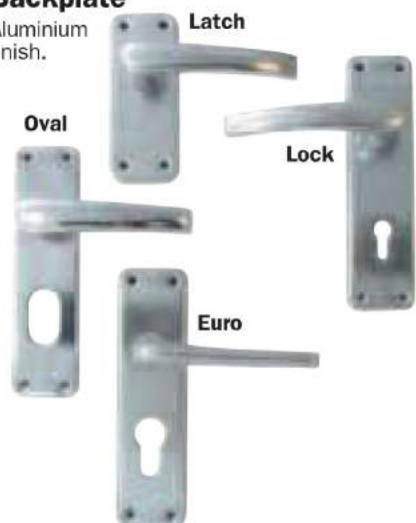
70mm (35/35). Satin chrome plate finish.  
Supplied with two keys and fixing screw.



Size	Order Code
35mm/35mm	<b>MTL-949</b> -4410K

## Budget Lever on Pressed Backplate

Aluminium finish.



Type	Order Code
Latch	<b>MTL-949</b> -5940K
Lock	-5950K
Euro	-5960K
Oval	-5970K



### 5-Lever Mortice Detainer Sashlock

Kitemarked to **BS3621**. Insurance approved sashlock, easily reversible latchbolt, five detainer mechanism, 64mm (2½") and 76mm (3") case size available. Supplied with square forend and strike. Supplied with two keys. Satin chrome plated finish.


**BS3621**

Size	Order Code <b>MTL-949</b>
64mm (2½")	<b>-4090K</b>
76mm (3")	<b>-4100K</b>

### 5-Lever Mortice Detainer Deadlock

Kitemarked to **BS3621**. Insurance approved sashlock, easily reversible latchbolt, five detainer mechanism, 64mm (2½") and 76mm (3") case size available. Supplied with square forend and strike. Supplied with two keys. Satin chrome plated finish.


**BS3621**

Size	Order Code <b>MTL-949</b>
64mm (2½")	<b>-4130K</b>
76mm (3")	<b>-4140K</b>

### Euro Profile Mortice Sashlock Case

Easily reversible latchbolt for internal and external door use. 64mm (2½") and 76mm (3") case size available. Brass or nickel plated square forend and strike. Satin chrome plated finish.



Size	Order Code <b>MTL-949</b>
64mm (2½")	<b>-4170K</b>
76mm (3")	<b>-4180K</b>

### 3-Lever Mortice Deadlock

64mm (2½") and 76mm (3") case size available. Supplied with radius forend and strike. Supplied with two keys. Satin chrome plated finish.



Size	Order Code <b>MTL-949</b>
64mm (2½")	<b>-4250K</b>
76mm (3")	<b>-4260K</b>

### Euro Profile Mortice Deadlock Case

For internal and external door use. 64mm (2½") and 76mm (3") case size available. Brass or nickel plated square forend and strike. Satin chrome plated finish.



Size	Order Code <b>MTL-949</b>
64mm (2½")	<b>-4290K</b>
76mm (3")	<b>-4300K</b>

### 3-Lever Mortice Sashlock

Easily reversible latchbolt, adjustable springing feature, 64mm (2½") and 76mm (3") case size available, supplied with square forend and strike. Supplied with two keys. Satin chrome plated finish.



Size	Order Code <b>MTL-949</b>
64mm (2½")	<b>-4210K</b>
76mm (3")	<b>-4220K</b>

### Aluminium Barrel Bolts

Internal domestic locking bolt. Supplied with wood screws.



Size (mm)	Finish	Order Code <b>MTL-949</b>
50	Aluminium	<b>-8140K</b>
75	Aluminium	<b>-8150K</b>
100	Aluminium	<b>-8160K</b>

### Brass Barrel Bolts

Supplied polished and lacquered, 1½" or 1" wide. Complete with brass wood screws.



Size	Finish	Order Code <b>MTL-949</b>
1" x 50mm	Brass	<b>-8100K</b>
1" x 75mm	Brass	<b>-8110K</b>
1" x 100mm	Brass	<b>-8120K</b>

### Coat Hooks

Finished in aluminium or stainless steel.



Finish	Order Code <b>MTL-949</b>
Aluminium	<b>-5910K</b>
Stainless Steel	<b>-5920K</b>

### Hat & Coat Hooks

Finished in aluminium or stainless steel.



Finish	Order Code <b>MTL-949</b>
Aluminium	<b>-5880K</b>
Stainless Steel	<b>-5890K</b>



**MATLOCK**
**Light Butt Hinges**


For general purpose use and in domestic situations. Self colour finish.



Size (mm)	Size (mm)	Order Code MTL-949
25	25 x 15 x 3	-8200K
38	38 x 18 x 5	-8210K
50	50 x 22 x 5	-8220K
65	65 x 25 x 7	-8230K
75	75 x 28 x 7	-8240K
100	100 x 40 x 10	-8250K

**Rising Butt Hinges**

Self closing hinges that also provide floor to ground clearance as they are opened. Available in a choice of left or right hand opening. Self colour finish.


**new**

Size (mm)	Opening	Order Code MTL-949
75 x 45 x 15	Left Hand	-8340K
75 x 45 x 15	Right Hand	-8350K

**Strong Butt Hinges**

For general purpose use. Galvanised finish.



Size (mm)	Finish	Order Code MTL-949
75	Galvanised	-8261K
100	Galvanised	-8266K

**Stainless Steel 2 Ball Bearing Butt Hinge**

**523CE**  
CE Class 13 fire hinge. Polished or satin stainless steel finish. Grade 304 stainless steel. One hour fire tested. Complete with screws.



Finish	Size (mm)	Order Code MTL-949
Satin	100 x 75 x 3	-4450K
Polished	100 x 75 x 3	-4460K

**Single Action Spring Hinges**

A very competitively priced hinge having all the features and operating abilities of more expensive products on the UK market. Supplied with screws, spare adjustment pins and cranking bar. Lacquered silver finish.



Size (mm)	Order Code MTL-949
75	-8310K
100	-8320K

**Double Action Spring Hinges**

A very strong and durable hinge, having all the attributes of all alternatives on the UK market at considerably reduced prices. Supplied with screws, spare adjustment pins and cranking bar. Lacquered silver finish.


**new**

Size (mm)	Size (mm)	Order Code MTL-949
75	75 x 65 x 20	-8270K
100	100 x 70 x 20	-8280K
150	150 x 90 x 25	-8290K

**Medium Strap Hinges**

Supplied as pairs. Commonly used for lift-up lids and traps. Self colour finish.



Length (mm)	Order Code MTL-949
203 (8")	-7640K
305 (12")	-7660K

**Heavy Field Gate Hinge Set**
**Adjustable**

Each set consists of top band, adjustable bottom band with full nuts hook to bolt and hook to drive. Complete with all fittings. Galvanised finish.


**new**

Supplied individually, boxed in 2s.

Size (mm)	Finish	Order Code MTL-949
600	BZP	-8470K

**Double Gate Fastener Set**

Each set consists of 460mm galvanised garage door drop bolt, BZP tubular receiver with square plate receiver, 350mm galvanised medium throw-over loop and all fixings to suit 75mm (3") thick gate post.

Supplied individually, boxed in 5s.


**new**

Size (mm)	Finish	Order Code MTL-949
350	BZP	-8490K

**Spring Loaded Gate Wheel**
**Medium Duty**

Fits to the outside edge of the lowest horizontal member of larger gates to support the weight when opening and closing. Complete with all fittings and large diameter (100mm) spring loaded wheel that provides smooth travel over uneven or bumpy ground. Bright zinc plated.


**new**

Supplied individually, boxed in 5s.

Size (mm)	Finish	Order Code MTL-949
284	BZP	-8770K

**Oval Door Stops**

Finished in aluminium or stainless steel.

Aluminium



Finish	Order Code MTL-949
Aluminium	-5500K
Stainless Steel	-5510K

**Secret Fix Door Stops**

Projecting door stop. Finished in aluminium or stainless steel. Size: 75mm.

Aluminium



Finish	Order Code MTL-949
Aluminium	-5530K
Stainless Steel	-5540K

**Rubber Door Stop**

Screw through type for fixing to floor.

Sold individually, boxed in 50s.



Size (mm)	Finish	Order Code MTL-949
35	Black	-9120K



## MATLOCK Auto Gate Catches

### Plate Pin - Medium Duty

For use on all types of gate. With cranked striker pin. Striker pin is plate type for fitting onto the surface of a post or fence. Packed complete with all fixing screws.

Supplied individually, boxed in 5s.




Size (mm)	Finish	Order Code MTL-949
32	BZP	-7010K
50	BZP	-7025K
57	BZP	-7030K

## Auto Gate Catches

### Screw Pin - Medium Duty

For use on all types of gate. With cranked striker pin. Striker pin is screw type for fitting through a post.

Supplied individually, boxed in 10s.



Size (mm)	Finish	Order Code MTL-949
70	BZP	-8840K

## Forged Straining Screws

### Hook to Eye

Used to adjust the tension in line wire or wire rope. Galvanised steel.



new

Size (mm)	Finish	Order Code MTL-949
6 x 110	BZP	-9140K
8 x 110	BZP	-9150K
10 x 125	BZP	-9160K
12 x 125	BZP	-9170K

### Eye to Eye

Used to adjust the tension in line wire or wire rope. Bright zinc plated steel.



new

Size (mm)	Finish	Order Code MTL-949
6	BZP	-3010K
8	BZP	-3020K
10	BZP	-3030K

## Oval Padlock Bolt

A simple and efficient lockable gate securing bolt.



Size (mm)	Finish	Order Code MTL-949
100	Galvanised	-7830K

## Garage Door Drop Bolts

A very strong product with numerous applications. Made from galvanised steel.



Size (mm)	Finish	Order Code MTL-949
600	BZP	-7075K

## Ferrule Locking Strainer

Used to put the tension into chain link fencing to prevent sagging between posts. Galvanised steel.



new

Size (mm)	Finish	Order Code MTL-949
90	BZP	-9190K

## Door/Gate Stop

Door and gate stop. Supplied complete with screws and rubber stopper.



Length (mm)	Finish	Order Code MTL-949
152 (6")	Grey Japanned	-7700K

## Ratchet Strainer

Used on concrete or wooden posts. A cam and ratchet system makes it easy to add tension. Galvanised steel.

new



Size (mm)	Finish	Order Code MTL-949
10	BZP	-9210K

## Spring Loaded Bolts

Spring loaded bolt suitable for metal or wooden gates.



Length x Shoot Dia. (mm)	Finish	Order Code MTL-949
68 x 10	Zinc Plated	-7670K
118 x 12	Zinc Plated	-7680K
130 x 16	Zinc Plated	-7690K

## Spring Loaded Animal Bolts

Spring loaded bolt with staple on plate, suitable for gates, paddocks etc.



Length x Shoot Dia. (mm)	Finish	Order Code MTL-949
118 x 12	Zinc Plated	-7850K

## Tower Bolts

General purpose bolts for shed doors etc.

\*150mm Necked Enclosed Tower Bolt



Length x Shoot Dia. (mm)	Finish	Order Code MTL-949
75 x 11	Black	-7760K
100 x 11	Galvanised	-7770K
100 x 11	Black	-7780K
150 x 11	Galvanised	-7790K
150 x 11	Black	-7800K
200 x 13	Black	-7810K
200 x 13	Black	-7820K

## Brenton Bolts

Padlockable security bolt.



Length x Shoot Dia. (mm)	Finish	Order Code MTL-949
101 x 12	Galvanised	-7710K
152 x 12	Galvanised	-7720K
203 x 12	Galvanised	-7730K
152 x 15	Galvanised	-7740K
203 x 15	Galvanised	-7750K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR



**MATLOCK** Security  
Hasps

Manufactured from hardened steel with a duplex nickel plated anti-corrosive finish. The hinge pins, fixings and assembly are concealed with a folded edge for tamper protection. Supplied with fixing screws.

**Double Hinged:**

Models can be used for internal and external corner mounting.

**Triple Hinged:**

Models also allow for use on non-flush fitting (stepped) surfaces.

**8120, 8110, 8100\* & 8150\*:**

For use on standard duty and domestic applications.

**8200\* & 8160\*:**

For use on medium duty applications.

\*Supplied complete with door reinforcement plates for improved security.


-8100K



-8150K



-8200K



Product Number	Shackle Type	Hinge Type	Size (mm)	To Suit Shackle	Security Rating	Order Code MTL-950
8120	Vertical	Single	92 x 37	8mm	2	-8120K
8110	Vertical	Single	120 x 45	8mm	2	-8110K
8100	Horizontal	Single	125 x 45	11mm	3	-8100K
8150	Horizontal	Double	160 x 45	11mm	3	-8150K
8200	Horizontal	Triple	200 x 45	11mm	3	-8200K
8160	Vertical	Triple	258 x 62	13mm	3	-8160K

**Safety Hasps & Staples**

Secure fixings are concealed by hasp when in locked position.



Length (mm)	Finish	Order Code MTL-949
75 (3")	Black	-6060K
115 (4 1/2")	Black	-6070K
150 (6")	Black	-6080K
75 (3")	Zinc Plated	-7918K
115 (4 1/2")	Zinc Plated	-7920K
152 (6")	Zinc Plated	-7930K

**Heavy-Duty Vertical Hasp & Staples**

Length (mm)	Finish	Order Code MTL-949
150 (6")	Black	-6120K
150 (6")	Galvanised	-6140K

**Short Pattern Heavy Hasp & Staple**

Length (mm)	Finish	Order Code MTL-949
150 (6")	Black	-6160K
150 (6")	Galvanised	-6180K

**Swivel Hasp & Staple**

Length (mm)	Finish	Order Code MTL-949
200 (8")	Galvanised	-6250K
250 (9")	Galvanised	-6260K

**Heavy Duty Hasp & Staples**

Rotating & padlockable.



Length (mm)	Finish	Order Code MTL-949
203 (8")	Galvanised	-7080K
203 (8")	Black	-7090K

**Traditional Cast Cabin Hooks**

For restraining doors and gates. Often used in stabling. Supplied individually packed and complete with all fixing screws.



Size (mm)	Finish	Order Code MTL-949
101 (4")	Galvanised	-7900K
152 (6")	Galvanised	-7910K

**Gate Spring**

A general purpose return spring for assisting in the closure of gates.

Supplied individually, boxed in 10s.



Size (mm)	Finish	Order Code MTL-949
200	Black	-7970K
250	Black	-7980K

**Cast Iron Hot Bed Handles**

Extremely versatile and hard wearing handle for use on doors, gates and cabinets. Black or galvanised finish.



Size (mm)	Finish	Order Code MTL-949
150	Black	-8030K
150	Galvanised	-8040K

**Heavy Chest Handles**

Handles lock at 90°. For lifting chests, tool boxes and cabinets. Black finish.



Size (mm)	Finish	Order Code MTL-949
100	Black	-8050K

**'Anti-Cut' U-Bar**

Molybdenum alloy steel, 'anti-cut' shackle. Vinyl coated U-bar. Suitable for indoor and outdoor use.



Shackle Dia. x Clearance	Order Code MTL-950
15 x 270mm	-6517K







## MATLOCK Security Ratings

All padlocks have a rating to indicate how secure they are, this is based on material, hardening, extra coating, shackle diameter, body width, and other security features such as anti-pick locks and 3, 4, 5 or 6 pin cylinders.



Rating	Uses
1 - 2	Minimum security for indoor and outdoor use on tackle boxes, suitcases and drawers etc.
3 - 4	Minimum to medium security for indoor and outdoor use on garages, cabinets, toolboxes, gates, truck doors, lockers, sheds, bicycles etc.
5 - 6	Medium security for indoor and outdoor use on garages, cabinets, toolboxes, gates, truck doors, lockers, sheds, bicycles etc.
7 - 8	Medium to maximum security for indoor and outdoor use on store front and factory gates, large tool chests, construction site storage etc.
9 - 10	Maximum security for indoor and outdoor use on store front and factory gates, large tool chests and construction site storage etc.



### Brass

Solid brass body with a hardened steel shackle and a double locking mechanism. For indoor and outdoor use on minimum to medium security items. 20mm: 3 pin cylinder. 30 and 40mm: 4 pin cylinder, 50 and 60mm: 5 pin cylinder. \*Single locking only.



Body Width	Shackle Dia. x Clearance	Rating (1 - 10)	Weight each	Order Code MTL-950
20mm	3.7 x 10.3mm	2*	50g	-6722K
30mm	4.8 x 15mm	3	100g	-6733K
30mm	4.8 x 50mm	3	130g	-6732K
40mm	4.8 x 22mm	3	170g	-6743K
40mm	7.0 x 50mm	4	190g	-6745K
50mm	7.0 x 26mm	4	280g	-6754K
60mm	8.8 x 27mm	4	430g	-6764K
Key Blank to suit 20mm			5g	-9900K
Key Blank to suit 30 & 40mm			5g	-9910K
Key Blank to suit 50 & 60mm			5g	-9920K

### Brass - Stainless Steel Shackle

Traditional style brass bodied padlock with a stainless steel shackle and a double locking mechanism. For indoor and outdoor use on many minimum to medium security items. 20mm: 3 pin cylinder, 30 and 40mm: 4 pin cylinder, 50 and 60mm: 5 pin cylinder. \*Single locking only.



Body Width	Shackle Dia. x Clearance	Rating (1 - 10)	Weight each	Order Code MTL-950
20mm	3.7 x 10.3mm	2*	50g	-7022K
30mm	4.8 x 15mm	3	100g	-7033K
40mm	4.8 x 22mm	3	170g	-7043K
50mm	7.0 x 26mm	4	275g	-7054K
60mm	8.8 x 27mm	4	430g	-7064K
Key Blank to suit 20mm			5g	-9900K
Key Blank to suit 30 & 40mm			5g	-9910K
Key Blank to suit 50 & 60mm			5g	-9920K

Key Change Every	
20mm	50
30mm	200
40 - 60mm	1000

### Brass Slimline

Solid brass body with a hardened steel changeable shackle. For indoor and outdoor use on minimum to medium security items.

#### Key Change Every

20mm	6
25mm	12
30mm	24
40 - 50mm	36



Body Width	Pack Quantity	Shackle Dia. x Clearance	Rating (1 - 10)	Weight each	Order Code MTL-950
20mm	1	3.2 x 12mm	2	40g	-6820K
20mm	4	3.2 x 12mm	2	40g	-7970K
25mm	1	4.8 x 15mm	3	55g	-6825K
25mm	4	4.8 x 15mm	3	55g	-7975K
30mm	1	4.8 x 15mm	3	70g	-6830K
30mm	4	4.8 x 15mm	3	70g	-7980K
35mm	1	5 x 43mm	3	90g	-6832K
35mm	4	5 x 43mm	3	90g	-7985K
40mm	1	6 x 20mm	4	125g	-6840K
40mm	4	6 x 20mm	4	125g	-7990K
50mm	1	7 x 25mm	4	200g	-6850K
50mm	4	7 x 25mm	4	200g	-7995K

### Laminated Brass - Combination Type

Laminated brass body with a brass shackle and a double locking mechanism. Available with four number tumbler (10,000 combinations) or three number tumbler (1,000 combinations). For indoor and outdoor use on minimum to medium security items.



Body Width	Shackle Dia. x Clearance	Rating (1 - 10)	Combination Number	Weight each	Order Code MTL-950
40mm	6 x 25mm	3	3	210g	-6203K
46mm	8 x 25mm	3	4	280g	-6263K

### Stainless Steel Disc Padlocks

Designed to provide medium to maximum security for indoor and outdoor use. Available in keyed differently and keyed alike versions.

**Shackle Dia. x Clearance:**  
9.5 x 17.3mm.  
**Body width:** 70mm.



Type	Order Code MTL-950
Keyed Differently	-8240K
Keyed Alike	-8250K

### Lock Block

Solid brass body and molybdenum shackle. Designed to provide medium to maximum security for indoor and outdoor use. \*keyed alike



Body Width	Shackle Dia. x Clearance	Order Code MTL-950
63mm	8 x 13.5mm	-8840K
83mm	11 x 16mm	-8860K
*83mm	11 x 16mm	-8900K

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**



## MATLOCK

Brass -  
Cross Key

Solid brass body with a hardened steel shackle and a double locking mechanism. Fitted with a dual lever 4 row 16 pin cylinder which has 1000 different key numbers. For indoor and outdoor use on minimum to medium security items.

Key change every 100,000.



Body Width	Shackle Dia. x Clearance	Rating (1 - 10)	Weight each	Order Code MTL-950
40mm	6.8 x 25mm	4	255g	-3844K
50mm	8.8 x 32mm	5	380g	-3855K
60mm	11 x 35mm	5	540g	-3865K



## Brass Anti-Pick Padlock

Solid brass body with a hardened steel changeable shackle and a double locking mechanism. Fitted with a hardened steel cover plate and an anti-pick 6 pin brass cylinder. For indoor and outdoor use on minimum to medium security items.

Key change every 20,000.



Body Width	Shackle Dia. x Clearance	Rating (1 - 10)	Weight each	Order Code MTL-950
38 x 76	6.3 x 25mm	4	310g	-3054K
38 x 76	6.3 x 75mm	4	335g	-3094K
50 x 76	9.5 x 50mm	6	445g	-3226K
50 x 76	9.5 x 75mm	6	475g	-3236K
Key Blank			5g	-9930K



## Brass - Anti-Pick Weatherproof

Solid brass body with a hardened stainless steel changeable shackle and a double locking mechanism.

Fitted with a hardened steel cover plate and an anti-pick 6 pin brass cylinder. Completely weatherproof padlock which is suitable for use in the harshest corrosive conditions on minimum to medium security items. Key change every 20,000.



Body Width	Shackle Dia. x Clearance	Rating (1 - 10)	Weight each	Order Code MTL-950
38mm	6.3 x 25mm	4	310g	-3554K
38mm	6.3 x 50mm	4	320g	-3574K
45mm	8 x 25mm	5	370g	-3655K
45mm	8 x 50mm	5	385g	-3675K
50mm	9.5 x 25mm	6	415g	-3756K
50mm	9.5 x 50mm	6	450g	-3776K
Key Blank			5g	-9930K



## Weather-Resistant - Long Shackle

Laminated steel body with hardened steel shackle, double locking mechanism and anti-pick cylinder. The PU coating makes this the most weather-resistant padlock. Ideally suitable for medium security for indoor and outdoor use in the harshest corrosive environments. For use on marine/brewery storage, haulage and warehouses etc. Available in a range of colours. All fitted with a weather-resistant key cover.



Body Width	Colour	Shackle Dia. x Clearance	Rating (1 - 10)	Order Code MTL-950
45mm	Red	8.1 x 55mm	5	-7615K
54mm	Yellow	10.7 x 46mm	6	-7626K
Key Blank				-9950K

## Laminated Brass

Laminated brass body with a hardened steel shackle, a double locking mechanism and a pin cylinder. For indoor and outdoor use on minimum to medium security items. Key change every 1,000.



Body Width	Shackle Dia. x Clearance	Rating (1-10)	Weight each	Order Code MTL-950
40mm	6.3 x 20mm	4	240g	-5824K
50mm	8.8 x 25mm	4	400g	-5834K
Key Blank			5g	-9950K

## Laminated Steel

Laminated steel body with a hardened steel shackle, a double locking mechanism and a 5 pin cylinder. For indoor and outdoor use on medium to maximum security items.

Key change every 1,000 (30mm every 200).



Body Width	Shackle Dia. x Clearance	Rating (1 - 10)	Weight each	Order Code MTL-950
30mm	5.2 x 18.5mm	4	220g	-5514K
40mm	6.3 x 25mm	5	265g	-5525K
44mm	7.0 x 25mm	5	330g	-5555K
50mm	8.8 x 25mm	7	500g	-5587K
65mm	11 x 34mm	8	600g	-5598K
Key Blank to suit 30mm			5g	-9940K
Key Blank to suit 40-65mm			5g	-9950K





**MATLOCK**

## Laminated Steel - Combination Type

Laminated steel, nickel plated body with a hardened steel shackle and a double locking mechanism. Available with four number tumbler (10,000 combinations) or three number tumbler (1,000 combinations). For indoor and outdoor use on minimum to medium security items.



Body Width	Shackle Dia. x Clearance	Rating (1 - 10)	No. of Dials	Weight each	Order Code MTL-950
40mm	6 x 25mm	4	3	185g	-6004K
40mm	6 x 45mm	4	3	200g	-6024K
46mm	8 x 25mm	4	4	270g	-6064K

## 4 Pin Strong Padlocks

4 pin padlocks available in a range of colours. Designed to provide minimum to medium security for indoor and outdoor use on garages, cabinets, toolboxes, gates, truck doors, lockers, sheds and bicycles etc. Available in keyed differently and keyed alike versions.

Colour	Body Width	Shackle Dia. x Clearance	Order Code Keyed Diff.	Order Code Keyed Alike
Black	40mm	7 x 21.5mm	-7120K	-7160K
Blue			-7125K	-7165K
Green			-7130K	-7170K
Orange			-7135K	-7175K
Red	40mm	7 x 21.5mm	-7140K	-7180K
Yellow			-7145K	-7185K

## Solid Brass Combination Padlocks

Solid brass padlocks designed to provide minimum to medium security for indoor and outdoor use on garages, cabinets, toolboxes, gates, truck doors, lockers, sheds and bicycles etc. Available in a range of sizes. Solid brass body with hardened steel shackle and 3 or 4 digit combination.

Body Width	Shackle Dia. x Clearance	No. of Dials	Pack Quantity	Order Code MTL-950
20mm	3.0 x 21.7mm	3	1	-8020K
20mm	3.0 x 21.7mm	3	4	-8070K
30mm	5.0 x 25.0mm	3	1	-8030K
30mm	5.0 x 25.0mm	3	4	-8080K
40mm	6.0 x 26.0mm	4	1	-8040K
40mm	6.0 x 26.0mm	4	4	-8090K

## Strong/Heavy Duty Padlocks

Designed to provide medium to maximum security for indoor and outdoor use on store front and factory gates, large tool chests, construction site storage etc. This heavy duty padlock has a hardened steel body, black e-coating, molybdenum shackle and 4 digit combination.

Body Width	Shackle Dia. x Clearance	No. of Dials	Order Code MTL-950
51.0mm	9.5 x 27mm	4	-8260K
62.0mm	11.0 x 51mm	4	-8270K

## PADLOCKS

GROUP 950



HARDENED SHACKLE



SITE MAINTENANCE

HARDENED SHACKLE



HARDENED SHACKLE



PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

© 2018

791



**MATLOCK Solid Steel Heavy-Duty**

Hardened solid steel, chrome and duplex nickel plated body with a hardened changeable steel shackle. Fitted with a double locking mechanism, hardened steel cover plate and an anti-pick six pin brass cylinder. For indoor and outdoor use on maximum security items.

**Key change every 20,000.**



Body Width	Shackle Dia. x Clearance	Rating (1 - 10)	Weight each	Order Code
63.5 x 76	11 x 25mm	9	680g	<b>-1509K</b>
63.5 x 76	11 x 50mm	9	725g	<b>-1529K</b>
63.5 x 76	11 x 75mm	9	770g	<b>-1539K</b>
Key Blank			5g	<b>-9930K</b>

**Aluminium - Anti-Pick Weatherproof**

Solid anodised lightweight aluminium body with a hardened stainless steel changeable shackle. Fitted with an anti-pick six pin brass cylinder and a double locking mechanism. Weatherproof padlock which is suitable for use in the harshest corrosive conditions on medium security items.

**Key change every 20,000.**

**HARDENED SHACKLE**



Body Width	Shackle Dia. x Clearance	Rating (1 - 10)	Weight each	Order Code
38mm	6.3 x 50mm	5	200g	<b>-5025K</b>
50mm	9.5 x 25mm	5	255g	<b>-5205K</b>
50mm	9.5 x 50mm	5	280g	<b>-5225K</b>
Key Blank			5g	<b>-9930K</b>

**Solid Steel - Anti-Pick Shrouded**

Hardened solid steel, chrome and duplex nickel plated body with a hardened changeable steel shackle. Fitted with a double locking mechanism, hardened steel cover plate and an anti-pick six pin brass cylinder. For indoor and outdoor use on medium to maximum security items.

**Key change every 20,000.**



Body Width	Shackle Dia. x Clearance	Rating (1 - 10)	Weight each	Order Code
50mm	9.5 x 25mm	7	480g	<b>-2027K</b>
63.5mm	11 x 25mm	9	830g	<b>-2039K</b>
Key Blank			5g	<b>-9930K</b>

**Solid Steel Anti-Pick**

Hardened solid steel, chrome and duplex nickel plated body with a hardened steel changeable shackle and a double locking mechanism. Fitted with a hardened steel cover plate and an anti-pick 6 pin brass cylinder. For indoor and outdoor use on medium to maximum security items.

**Key change every 20,000.**



Body Width	Shackle Dia. x Clearance	Rating (1 - 10)	Weight each	Order Code
50 x 76	9.5 x 25mm	7	400g	<b>-1107K</b>
50 x 76	9.5 x 50mm	7	430g	<b>-1127K</b>
50 x 76	9.5 x 75mm	7	460g	<b>-1137K</b>
63.5 x 76	11 x 25mm	9	710g	<b>-1209K</b>
63.5 x 76	11 x 75mm	9	800g	<b>-1239K</b>
Key Blank			5g	<b>-9930K</b>

**Solid Steel - Anti-Pick, Anti-Cut**

Hardened solid steel, chrome and duplex nickel plated body with a molybdenum alloy anti-cut changeable steel shackle. Fitted with a double locking mechanism and an anti-pick six pin brass cylinder. For indoor and outdoor use on medium to maximum security items.

**Key change every 20,000.**



**ANTI-CUT SHACKLE**

Body Width	Shackle Dia. x Clearance	Rating (1 - 10)	Weight each	Order Code
50 x 76	9.5 x 25mm	8	400g	<b>-2508K</b>
50 x 76	9.5 x 50mm	8	430g	<b>-2528K</b>
50 x 76	9.5 x 75mm	8	455g	<b>-2538K</b>
63.5 x 76	11 x 25mm	9	710g	<b>-2609K</b>
63.5 x 76	11 x 50mm	9	755g	<b>-2629K</b>
63.5 x 76	11 x 75mm	9	800g	<b>-2639K</b>
Key Blank			5g	<b>-9930K</b>

**Weather-Resistant - Shrouded Shackle**

Laminated steel body with hardened steel shackle, double locking mechanism and anti-pick cylinder. The PU coating makes this the most weather-resistant padlock. Ideally suitable for medium security for indoor and outdoor use in the harshest corrosive environments. For use on marine/brewery storage, haulage and warehouses etc. Available in a range of colours. All fitted with a weather-resistant key cover.



Body Width	Colour	Shackle Dia. x Clearance	Rating (1 - 10)	Order Code
<b>Covered Shackle</b>				
50mm	Blue	8 x 33mm	6	<b>-7716K</b>
62mm	Black	10 x 30mm	8	<b>-7728K</b>
75mm	Yellow	11 x 34mm	9	<b>-7759K</b>
Key Blank				<b>-9970K</b>

**Weather-Resistant**

Laminated steel body with hardened steel shackle, double locking mechanism and anti-pick cylinder. The PU coating makes this the most weather-resistant padlock. Ideally suitable for medium security for indoor and outdoor use in the harshest corrosive environments.

For use on marine/brewery storage, haulage and warehouses etc. Available in a range of colours. All fitted with a weather-resistant key cover.



Body Width	Colour	Shackle Dia. x Clearance	Rating (1 - 10)	Order Code
<b>Standard</b>				
45mm	Red	8.1 x 18mm	5	<b>-7515K</b>
54mm	Green	10.7 x 20mm	6	<b>-7526K</b>
69mm	Black	9 x 30mm	7	<b>-7537K</b>
Key Blank to suit 45 & 54mm				<b>-9950K</b>
Key Blank to suit 69mm				<b>-9970K</b>



**LOK015**

For storage of keys or other machine activation devices. Manufactured from powder coated heavy duty steel.

**Capacity:** 13 padlocks (locks not included).


**new**

Product Number	Dimensions (W x H x D)	Order Code
LOK015	255 x 155 x 100mm	<b>-9040K</b>

**Standard Gate Valve Lockout**

Resistant to cracking and abrasion. Three padlock holes. Di-electric properties. Rotates freely around valve covers. Resistant to extreme temperatures. Suitable for hasps and padlocks.

**Colour:** red (other colours available on request).

**Min/Max. shackle dia.:** 6.5mm.

**Min. shackle clearance:** 38mm. (Padlock not included)



Product Number	Hand Wheel Diameter	Order Code
LOK001	25 - 64mm	<b>-8716K</b>
LOK002	64 - 127mm	<b>-8726K</b>
LOK003	127 - 165mm	<b>-8736K</b>
LOK004	165 - 254mm	<b>-8746K</b>

**Large Advanced Lockout Station**

Engineered from plastic PC, with multiple board clips to house padlocks and hasps including built-in spaces for tags and tie wraps. Cover supplied enables station to be locked out.

**Contents:**

1x advanced lockout station (10-20 locks)

10x safety lockout

padlocks - red

1x vinyl coated lockout

hasp - 25mm

1x vinyl coated lockout

hasp - 38mm

1x lockout tags -

Do not operate

(single-sided 10 pack)

1x lockout tags -

Do not use

(single-sided 10 pack)


**new**

Dimensions (H x W x D)	Order Code
558 x 393 x 65mm	<b>MTL-950 -9220K</b>

**7 & 16 Lockout Station - Boards Only**

Manufactured from heavy duty durable acrylic.

**LOK016**
**LOK016**

Two hooks for hasps.

One padlock bar (takes

seven padlocks).

Two pockets for lockout

tags. Holes for wall fixing.

**LOK017**

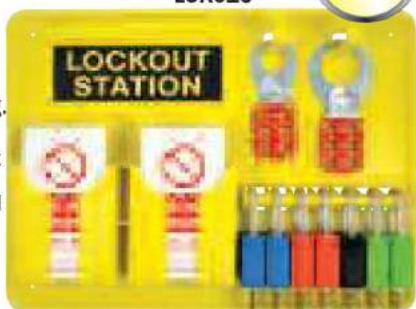
Contents as LOK016 but

with two padlock bars

(takes 16 padlocks), and

one pocket.

Tags, padlocks and hasps are not included.


**new**

Product Number	Number of Locks	Dimensions (W x H)	Order Code
LOK016	7	393 x 292mm	<b>-8605K</b>
LOK017	16	342 x 342mm	<b>-8610K</b>

**LOCKOUT & TAGOUT SYSTEMS**
**GROUP  
950**
**Safety Lockout Padlocks - Keyed Differently**

Individually keyed to differ 6-pin lock which will not release the key until the shackle is closed. Non-conductive and non-sparking. Resistant to chemicals and corrosion. Colour coded. Each padlock is supplied boxed with one key and keyring.

**Dimensions:**

**Body width:** 20 x 42mm.

**Shackle diameter x clearance:** 6.5 x 38mm.



Product Number	Colour	Order Code
LOK007	Red	<b>-7950K</b>
LOK008	Yellow	<b>-7960K</b>
LOK009	Green	<b>-7930K</b>
LOK010	Blue	<b>-7920K</b>
LOK011	Black	<b>-7910K</b>
LOK012	Orange	<b>-7940K</b>

**Safety Lockout Padlocks**
**Long Shackle**

Individually keyed 6-pin lock which will not release the key until the shackle is closed.

- Re-inforced nylon
- Colour coded with a photo-luminescent label
- Supplied boxed with one key and keyring

**Shackle height:** 82mm


**new**

Colour	Order Code
Black	<b>-9320K</b>
Blue	<b>-9330K</b>
Green	<b>-9340K</b>
Orange	<b>-9350K</b>
Red	<b>-9360K</b>
Yellow	<b>-9370K</b>

**Lockout Warning Tags - Double-Sided**

Flexible polyester tags, resistant to water, oil and extreme temperatures. Matt surface allows you to write on them. Pack of 10 tags with cable ties.

**Size:** 75 x 135mm.

**PACKS OF  
10**
**new**


Product Number	Description	Order Code
LOK050	Do Not Operate	<b>-8520K</b>
LOK051	Do Not Start	<b>-8540K</b>
LOK090	Do Not Operate-Locked Out	<b>-8560K</b>

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**

**793**
© 2018



**MATLOCK** Lockout Kits

Pre-selected kits designed to cover the most common uses in industry. Supplied in a handy carry case.

**Contents:**

- 1x Lockout Shell Case/Pouch
- 2x Red Safety Lockout Padlocks (KD)
- 2x Single Tag with Eyelet - (Double Sided)
- 1x MCB Lockout Pin Out Standard
- 1x MCB Lockout Pin In Standard
- 1x MCB Lockout Pin Out Standard
- 1x Yellow MCB Lockout - Universal
- 1x Yellow MCB Lockout - Type 1
- 1x Ultra-fine permanent pen

**11  
PIECES**



Product Number  
LOK229

Order Code  
**MTL-950**  
-9190K

**Maintenance Lockout Kit**

Pre-selected kit designed to cover the most common uses in industry. Supplied in a handy carry case.

**Contents:**

- 1x Lockout Shell Case/Pouch
- 2x Red safety lockout padlocks (KD)
- 2x Single Tag with Eyelet - (Double Sided)
- 1x MCB Lockout Pin Out Standard
- 1x MCB Lockout Pin In Standard
- 1x MCB Lockout Pin Out Wide
- 1x Universal Circuit Breaker Lockout
- 1x Aluminium MCB Lockout Toggle
- 1x Multi-purpose Cable Lockout 2.5m
- 1x Non-Conductive Lockout Hasp
- 1x Ultra-fine permanent pen

**13  
PIECES**



Product Number  
LOK230

Order Code  
**MTL-950**  
-9230K

**Economy Lockout Hasp**

**LOK048**

Made from hardened powder coated steel. Double locking arrangement.

**Colour:** red.

**Material:** steel.

**Jaw capacity:** 25mm.

**Accepts**

**padlocks:**

shackle

clearance

20mm, shackle

diameter

10mm.

**new**



Product Number  
LOK048

Order Code  
**MTL-950**  
-8325K

**Vinyl Coated Lockout Hasps**

The padlock fixing section has been vinyl coated for grip and greater visibility.

**Max. padlock shackle**

**diameter:** 9.5mm.

**Min. padlock**

**shackle**

**clearance:**

20mm.

**Colour:** red.

**new**



Product Shackle Order Code  
Number Width **MTL-950**  
LOK044 25mm -8334K  
LOK045 38mm -8336K

**Multi-Purpose Dual Lockout Hasp**

**LOK047**

Dual scissor action hasp with steel body and powder coating to prevent rusting. Two different jaw sizes ensure ultimate adaptability.

**Min./Max.**

**shackle diameter:**

10/20mm.

**new**



Product Number  
LOK047

Order Code  
**MTL-950**  
-8340K

**Aluminium Lockout Hasp & Label**

**LOK049**

Combines the benefits of a standard hasp and tag simultaneously. Supplied with spare label. Used when you wish to use multiple padlocks to isolate one energy source.

**Size:** 184 x 76 x 5mm, 190 x 77 x 16mm with tab.

**Max. shackle**

**diameter:** 8mm.

**Min. shackle**

**clearance:** 20mm.

**new**



Product Number  
LOK049

Order Code  
**MTL-950**  
-8300K

**Lockout Tagout Kit**

Pre-selected kits are designed to cover the most common uses in industry. Supplied in a handy carrying case or bag, they provide a convenient choice for all lockout users.

**Contents:**

- 1 x 300mm lockout bag
- 1 x Small ball valve lockout
- 1 x Multi-purpose cable lockout
- 1 x 25mm Vinyl coated hasp
- 1 x 38mm Vinyl coated hasp
- 2 x Red safety lockout padlocks (KD)
- 1 x Pack (10) of 'Do not operate' tags
- 1 x Ultra-fine permanent pen
- 1 x Caution Lockout in operation A-Board
- 1 x Adjustable gate valve
- 1 x MCB Lockout Pin Out Standard
- 1 x Universal MCB lockout
- 1 x Pneumatic lockout

**new**



**14  
PIECES**



Product Number  
LOK116

Order Code  
**MTL-950**  
-9240K



# Pipeline Marking Legislation

## Health & Safety (Safety Signs & Signals) Regulations 1996

The purpose of the Directive is to encourage standardisation of safety signs throughout all of the member states of the European Union. This regulation requires employers to label pipe work that contains hazardous substances. The colour of the label is defined by British Standard BS 1710 or European Standard RAL. Pipe work marking tape should be positioned on both sides close to all valves, changes in pipe direction, where pipes pass through other walls or floors and every 7 - 14m on straight runs of pipe work.



### BS Pipeline Marking & Identification Tape

Suitable for use at filling points, drain valves, stops and flanging points. It is recommended that pipes be clearly labelled at points where contents of the pipes could be exposed. Polypropylene coated vinyl tape for durability. 50mm x 33m.



Text	Width (mm)	Weight	Order Code AVN-964
Gas	50	200g	-2100K
Steam	50	200g	-2110K
Water	50	200g	-2120K
Electricity	50	200g	-2130K
Flow	50	200g	-2140K
Return	50	200g	-2150K
↑ (Arrows)	50	200g	-2160K
Air	50	200g	-2170K
Oxygen	50	200g	-2180K
Acid	50	200g	-2190K
Hot	50	200g	-2200K
Fire	50	200g	-2210K

# Hazard Tape Legislation

*Regulation 13 of the Workplace Regulations 1992 (Part V of Schedule I) requires:*

- All dangerous locations, obstacles and traffic routes must be marked in yellow/black diagonal stripes.

*Regulation 17 of the Workplace Regulations 1992 (Part V of Schedule I) requires:*

- All traffic routes within workplaces are indicated where necessary for health and safety reasons, using markings consisting of a continuous highly visible line.



### Barrier Tape, Lane & Hazard Tape

High quality self-adhesive diagonal stripe hazard tape. High grade PVC.

#### Hazard Warning Tape

Conventional usage:

For low head room, obstructions to be avoided, changes in floor levels, mobile equipment and placing around warning notices.

For locating fire equipment, placing around prohibition and indicating inflammable areas.

For placing around fire escapes, safety equipment, first aid posters and equipment and breathing apparatus.



Colour	Width x Length	Weight	Order Code AVN-964
White	50mm x 33m	400g	-4020B
Yellow	50mm x 33m	400g	-4010A
Yellow/Black	50mm x 33m	400g	-4030C
Red/White	50mm x 33m	400g	-4040D
Green/White	50mm x 33m	400g	-4080H
Green	50mm x 33m	400g	-4050E
Blue	50mm x 33m	400g	-4060F
Black	50mm x 33m	400g	-4070G
Red	50mm x 33m	400g	-4090J
Yellow/Black	75mm x 33m	600g	-4230C



### Barrier Tape - Non-Adhesive

Non-adhesive hazard tape. Red & white or yellow & black diagonal stripe. (30 micron). With dispenser box.

**Width x length:** 75mm x 500m.



Colour	Order Code AVN-964
Red/White	-3750K
Yellow/Black	-3760K

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**

795





### Anti-Slip Floor Tape

Provides extra traction on slippery surfaces. Self-adhesive back for ease of installation. Can be used indoors or outdoors. Resistant to water, motor oil, detergents, solvents and UV light.



Roll length: 18m.

Colour	Width (mm)	Order Code
Black	25	-2025K
Black	50	-5360K
Black	100	-5370K

### Anti-slip Cleats

Pad size 610mm x 150mm. Supplied in black.

**General Purpose**  
Ideal for stairways, ladders and machine footplates.

**Coarse**  
Ideal for indoor and outdoor use.



Type	Pack Qty	Order Code
General Purpose	5	-5240K
	10	-5250K
Coarse	5	-5320K
	10	-5330K

### Magnetic Self-Adhesive Strip

Backed with a strong, permanent self-adhesive for mounting items onto any ferrous surface.



Label Size W x L	Order Code
12.70mm x 30mm	-0160K
20mm x 10mm	-0170K

### Magnetic Easy-Wipe Racking Strip

A flexible magnetic strip which adheres to any steel surface. Easily cut to size with a gloss vinyl surface that can be written on. For use with drywipe pens and solvent cleaner for wiping. 10m white rolls.




Label Size W x L	Order Code
120mm x 10m	-0130K
30mm x 10m	-0140K
50mm x 10m	-0150K

### Identification Tags With String

Made from 100% recycled board. Reinforced with washers for added strength. Available in buff, blue, green, red, white and yellow.

Please note, colours are for guidance only.



Colour	Size	Qty	Dimensions (mm)	Order Code
Buff	1	1000	70 x 35	-0020K
	2	1000	82 x 41	-0030K
	3	1000	96 x 48	-0040K
Buff	4	1000	108 x 54	-0050K
	5	1000	120 x 60	-0060K
	6	1000	134 x 67	-0070K
Blue	2	250	120 x 60	-0080K
Green	2	250	120 x 60	-0090K
Red	2	250	120 x 60	-0100K
White	2	250	120 x 60	-0110K
Yellow	2	250	120 x 60	-0120K

### KENNEDY Identity Discs

Suitable for all identification uses. 30mm outside diameter.



Type	Material	Order Code
Plain (Single)	Aluminium	-1030K
	Brass	-2030K
Numbered 1 - 100	Aluminium	-1130K
(Pack of 100)	Brass	-2130K

### No Smoking Including E-Cigarettes Signs

Rigid and self-adhesive. All our products comply fully with the relevant Health & Safety legislation.



Dimensions (mm)	Type	Order Code
148 x 210	Self-Adhesive Rigid PVC	-9068K
		-9069K
200 x 300	Self-Adhesive Sliding Sign	-9070K
		-9071K

### Electronic Cigarettes Permitted Signs

Rigid and self-adhesive.



Dimensions (mm)	Type	Order Code
200 x 300	Self-Adhesive Rigid PVC	-9072K
		-9073K

### No Smoking / E-Cigarettes Permitted Signs

Rigid and self-adhesive.

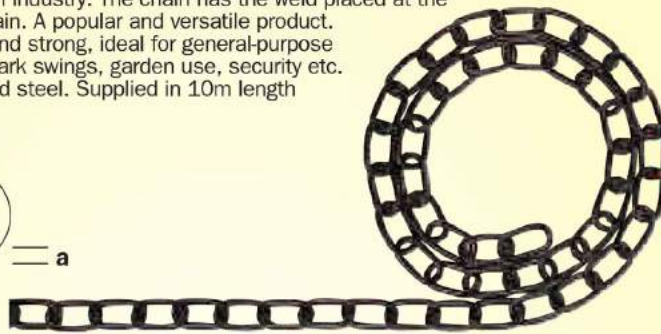



Dimensions (mm)	Type	Order Code
200 x 300	Self-Adhesive Rigid PVC	-9074K
		-9075K



## MATLOCK Welded Straight Link Chain

Often used for common everyday uses such as trailer ties and door stays as well as the handling of materials in industry. The chain has the weld placed at the side of each link of chain. A popular and versatile product. Welded chain is light and strong, ideal for general-purpose applications such as park swings, garden use, security etc. Manufactured from mild steel. Supplied in 10m length packs in boxes.



### Japanned

From the ancient Japanese method of stove enamelling. Results in an attractive shiny black surface. Ideal for outdoor use.

Link Size a x b x c (mm)	Recommended Loading (kg)*	Length per Box	Weight each (kg)	Order Code MTL-978
3 x 21 x 8	50	10m	1.60	-1010K
4 x 26 x 9	85	10m	2.70	-1020K
5 x 28 x 11	130	10m	4.70	-1030K
6 x 33 x 13	140	10m	7.00	-1040K
8 x 40 x 15	160	10m	9.00	-1050K

### Galvanised

Gives a high standard of corrosion resistance in all exterior environments. The thickness of the zinc coating may be variable due to the process of dipping in molten zinc. Recommended for exterior use.

Link Size a x b x c (mm)	Recommended Loading (kg)*	Length per Box	Weight each (kg)	Order Code MTL-978
3 x 21 x 8	50	10m	1.70	-1110K
4 x 26 x 9	85	10m	2.90	-1120K
5 x 28 x 11	130	10m	5.00	-1130K
6 x 33 x 13	140	10m	7.20	-1140K
8 x 40 x 15	160	10m	9.30	-1150K

### Bright Zinc-Plated (BZP)

Zinc-plating involves the electrolytic application of zinc by immersing clean steel parts in a zinc salt solution and applying an electric current. This process applies a layer of pure zinc. Ideal for exterior use.

Link Size a x b x c (mm)	Recommended Loading (kg)*	Length per Box	Weight each (kg)	Order Code MTL-978
3 x 21 x 8	50	10m	1.70	-1210K
4 x 26 x 9	85	10m	2.90	-1220K
5 x 28 x 11	130	10m	5.00	-1230K
6 x 33 x 13	140	10m	7.20	-1240K
8 x 40 x 15	160	10m	9.30	-1250K

### Solid Brass Oval

A general purpose chain, decorative and rust resistant.

Link Size a x b x c (mm)	Finish	Length per Box	Weight each (kg)	Order Code MTL-978
1.8 x 13	Chrome	10m	0.70	-1810K
1.8 x 13	Polished	10m	0.70	-1820K
2.3 x 16	Chrome	10m	0.97	-1910K
2.3 x 16	Polished	10m	0.97	-1920K

### Stainless Steel Long Link

Stainless steel marine grade for additional corrosion resistance.

Link Size a x b x c (mm)	Recommended Loading (kg)*	Length per Box	Weight each (kg)	Order Code MTL-978
3 x 26 x 6	80	10m	2.20	-2020K
4 x 32 x 8	120	10m	3.40	-2030K
5 x 35 x 10	160	10m	5.10	-2040K
6 x 42 x 12	250	10m	5.82	-2050K
8 x 52 x 16	460	10m	11.40	-2060K

\* Chains are NOT tested. Load figures are guidance only.

### Mending Links

With 'scarf' opening at one end for maximum strength. Ideal for joining or repairing chains. Galvanised finish.



Size (mm)	Length (mm)	Pack Qty	Order Code MTL-978
5	32 (1 1/4")	5	-3300K
6	38 (1 1/2")	5	-3310K
7	51 (2")	2	-3320K
8	51 (2")	2	-3330K

### Cleat Hooks

Cast iron hooks generally for use with pulleys.



Length (mm)	Finish	Order Code MTL-978
75 (3")	Electro-Galv	-4620K
100 (4")	Electro-Galv	-4630K
150 (6")	BZP	-4640K

## Quick Repair Links

A connection for joining lengths of chain or rope. Available in two finishes.



Link Dia. (mm)	Finish	Pack Qty	Order Code MTL-978
3.5 (3/32")	Zinc	2	-3370K
4 (5/32")		2	-3380K
5 (3/16")		2	-3390K
6 (1/4")		1	-3400K
8 (5/16")		1	-3410K
4 (5/32")	Stainless Steel	2	-3450K
5 (3/16")		2	-3460K
6 (1/4")		2	-3470K
8 (5/16")		2	-3480K

## Heavy Duty Security Chain

### Black Nylon

Hardened square links with nylon sheath for protection. For domestic and industrial applications.



Chain Length	Link Dia.	Order Code MTL-978
1200mm	10mm	-3100K
1500mm		-3110K

## Strong Link Security Chain

### Bright Zinc Plated (BZP)

Hardened links with a polypropylene moulded sheath for added protection. For domestic and industrial applications.



Chain Length	Link Dia.	Order Code MTL-978
900mm	8mm	-3200K
1200mm		-3210K
1500mm		-3220K

## Spiked Steel Chain

### Galvanised

Ornamental welded steel chain with spike every alternate link. Hot dip galvanised for maximum corrosion resistance.



Chain Length	Link Dia.	Order Code MTL-978
10m	6mm	-3020K

## S-Hooks

General-purpose hook ideal for hanging baskets etc. Galvanised finish.



Length (mm)	Pack Qty	Dia. of Material	Order Code MTL-978
25 (1")	10	3.0mm	-3700K
38 (1 1/2")	10	4.5mm	-3710K
51 (2")	10	5.5mm	-3720K
63 (2 1/2")	5	6.3mm	-3730K
76 (3")	5	8.0mm	-3740K
100 (4")	5	10.0mm	-3750K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR



**MATLOCK**

**Swivel Harness  
Snap Hook**

A general-purpose hook ideal for keys, leashes and holdalls.



Length x Eye (mm)	Finish	Order Code MTL-978
76 x 20 (3" x 3/4")	Nickel-Plated	-4540K

**Swivel Spring Billet Hook**

Animal leash clips for chains, with swivel to prevent knotting and twisting.



Length (mm)	Finish	Order Code MTL-978
57 (2 1/4")	Nickel-Plated	-4510K

**Ring On Plate**

For tethering animals, mooring small boats, and securing equipment.



Ring x Plate (mm)	Finish	Order Code MTL-978
50 x 50 (2" x 2")	Galvanised	-4740K

**Staple On Plate**

A comprehensive range of accessories to suit flexible connectors, ropes and chains. For permanently fixing chain or rope to a wall, fence or post.



Staple x Plate (mm)	Finish	Order Code MTL-978
50 x 50 (2" x 2")	Galvanised	-4720K

**Hook On Plate**

End fitment for mounting on to fence posts or walls.



Hook x Plate (mm)	Finish	Order Code MTL-978
50 x 50 (2" x 2")	Galvanised	-4700K

**Bow Shackles**

A coupling link with a bow shape to allow extra clearance for more than one length of chain or rope. Material and pin diameters are equal except where stated. Rated loads are for guidance only. 'Tested' bow shackles are available to order.



Material x Pin Dia. (mm)	Finish	Order Code MTL-978
6 (1/4")	Galvanised	-4420K
10 (3/8")	Galvanised	-4440K
13 (1/2")	Galvanised	-4450K

**Swivel Spring Hooks**

Connectors for ropes and chains, with swivel to allow revolving and prevent knotting and twisting. Zinc plated finish.



Length (mm)	Pack Qty	Order Code MTL-978
50 (2")	2	-3500K
63 (2 1/2")	2	-3510K
75 (3")	2	-3520K
90 (3 1/2")	2	-3530K
100 (4")	2	-3540K

**Commercial Thimbles**

A metal loop that forms a rope eyelet to prevent wear and tear. Galvanised finish.



Length x Rope Dia. (mm)	Pack Qty	Order Code MTL-978
25 x 3 (1" x 1/8")	4	-3800K
28 x 4 (1 1/8" x 5/32")	4	-3810K
32 x 5 (1 1/4" x 3/16")	4	-3820K
38 x 6 (1 1/2" x 1/4")	4	-3830K

**Spring Hooks**

A permanent end connector for chain and rope.



Length (mm)	Finish	Order Code MTL-978
50 (2")	Zinc-Plated	-3600K
63 (2 1/2")	Zinc-Plated	-3610K
75 (3")	Zinc-Plated	-3620K
90 (3 1/2")	Zinc-Plated	-3630K
100 (4")	Zinc-Plated	-3640K

**Wire Rope Grips**

To grip the return ends of wire rope when in a loop. For rope grips shackles supplied with certificates of conformity please.



Wire Rope Dia. (mm)	Finish	Pack Qty	Order Code MTL-978
3 (1/8")	Galvanised	4	-5010K
5 (3/16")	Galvanised	4	-5020K
6 (1/4")	Galvanised	4	-5030K
8 (5/16")	Galvanised	2	-5040K
10 (3/8")	Galvanised	2	-5060K
13 (1/2")	Galvanised	2	-5070K

**Dee Shackles**

A coupling link for chain and rope with a 'D' shape to prevent excess movement. Material and pin diameters are equal except where stated. Rated loads are for guidance only - 'tested' dee shackles are available to order.



Material x Pin Dia. (mm)	Finish	Pack Qty	Order Code MTL-978
5 (3/16")	Galvanised	4	-4320K
6 (1/4")	Galvanised	4	-4330K
8 (5/16")	Galvanised	2	-4340K
10 (7/16")	Galvanised	2	-4350K
12 (1/2")	Galvanised	2	-4360K
16 (5/8")	Galvanised	2	-4370K
4 (5/32")	St. Steel	2	-4380K
5 (3/16")	St. Steel	2	-4390K
6 (1/4")	St. Steel	2	-4400K
8 (5/16")	St. Steel	2	-4410K

**Carbine Hooks**

Quick release hook for connecting to chain or rope.



Dia. x Length (mm)	Finish	Pack Qty	Order Code MTL-978
5 x 50 (2")	Galvanised	2	-4120K
6 x 60 (2 3/8")	Galvanised	2	-4130K
7 x 70 (2 3/4")	Galvanised	2	-4140K
8 x 80 (3 1/2")	Galvanised	2	-4150K
10 x 100 (4")	Galvanised	2	-4160K
4 x 40 (1 11/32")	St. Steel	2	-4180K
5 x 50 (2")	St. Steel	2	-4181K
6 x 60 (2 3/8")	St. Steel	2	-4182K
8 x 80 (3 1/2")	St. Steel	2	-4183K





## MATLOCK Pulleys

Ideal for flagpoles, washing lines, and rolling back awning canopies. With cast wheels for ropes up to 8mm dia. Line pulleys are supplied fitted with S type hooks. Galvanised pulleys have cast wheels for rope up to 8mm dia. Black (epoxy) pulleys have nylon wheels for rope up to 8mm dia. All types below are with single wheel.

Pulley Type	Sheath Dia. (mm)	Finish	Order Code
Awning	38 (1½")	Galvanised	<b>-3910K</b>
Awning	38 (1½")	Black	<b>-3900K</b>
Line	38 (1½")	Galvanised	<b>-3920K</b>
Upright	38 (1½")	Black	<b>-3930K</b>
Screw	44 (1¾")	Black	<b>-3940K</b>
Sash	44 (1¾")	Zinc Plated	<b>-3950K</b>



### Jute Rope

6mm x 10m hank and 00m reel. No.4 type. Eight plait construction with core. 100% natural jute fibre. Rustic feel. Knots well. Hard-wearing and tactile. Resistant to heat and fire. Low stretch. Fully biodegradable. Store in a dry place. A general-purpose rope used by builders, DIY and gardeners.



Size Dia x Length	Weight each	Order Code
6mm x 10m	185g	<b>-5510K</b>
6mm x 100m	1850g	<b>-5520K</b>

### Waxed Cotton Rope

6mm x 10m hank and 100m reel. No.4 type. 16 plait construction. Waxed for longer life. Polypropylene core for added strength. Hard-wearing and tactile. Weather-resistant. Low stretch. Smooth running. Used in the building trade and DIY for sash window repair, household refurbishment and outdoor use.



Size Dia x Length	Weight each	Order Code
6mm x 10m	240g	<b>-5710K</b>
6mm x 100m	2.4kg	<b>-5720K</b>

### Polished Cotton Rope

6mm x 10m hank. No.8 type. Solid 12 braid construction. Centre core. 100% pure cotton. Traditional red spot design. Polished finish for longer life. Round section. High abrasion resistance. Moisture-resistant. Low stretch. Smooth running. For sash window repair and industrial and domestic pulley systems.



Size Dia x Length	Weight each	Order Code
6mm x 10m	285g	<b>-5910K</b>

### Hi Vis Braided Cord

4mm x 100m reel. Solid 16 plait construction. Highly flexible with polypropylene for added strength and durability, weather-resistant and will float on water. Low stretch and smooth running.



Size Dia x Length	Weight each	Order Code
4mm x 100m	600g	<b>-6840K</b>

### Polyester Rope

6mm x 100m reel. No.4 type. 8 plait construction. Centre core. 100% polyester. Multi-filament. High tenacity. Round section. Easy to handle, knot and splice. High abrasion-resistance. Resistant to organic and mineral acids, oxidising agents and diluted alkalis. UV-resistant. Weather-resistant. Low stretch. Smooth running. A general-purpose high strength rope, suitable for repairing sash windows.



Size Dia x Length	Weight each	Order Code
6mm x 100m	2.3kg	<b>-5620K</b>

### Polyester White Sash Cord

100% polyester with low stretch and high abrasion resistance. Suitable for use on sash windows and for all year outdoor use. UV and weather resistant and easy to handle, knot and splice. 8 plait construction.



Size Dia x Length	Weight each	Order Code
6mm x 10m	225g	<b>-5610K</b>
6mm x 100m	3.02kg	<b>-5920K</b>



**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**



Moulded out of custom compounded rubber (50%) with reinforced ends. Strong end hooks, zinc-plated for added rust protection.



Size Length x Width	Weight each	Order Code <b>MTL-978</b>
400 x 40mm	134g	<b>-4200K</b>

### Elastic Shock Cord

Manufactured from hard-wearing and rot-proof elastic shock cord with a multi-stranded elastic core, the outer polythene cover is UV-resistant, weatherproof and heat cut and sealed to prevent fraying. Ideal for securing awkward items etc.



Size	Order Code <b>MTL-978</b>
6mm x 8m	<b>-6560K</b>
8mm x 8m	<b>-6580K</b>

### Industrial Load Straps

#### Load Strap Plain End

Supplied as a single strap with ratchet unit attached to one end. Tension is applied by looping the strap around the cargo and threading back through the ratchet. Designed to safely secure cargo for transport. **EN12195-2.**



Size (Width x Length)	Min. Breaking load	Order Code <b>MTL-978</b>
25mm x 2.5m	300kg	<b>-8020K</b>
25mm x 4.5m	800kg	<b>-8040K</b>
25mm x 4.5m	1,000kg	<b>-8060K</b>
25mm x 6.0m	800kg	<b>-8080K</b>
25mm x 6.0m	1,000kg	<b>-8100K</b>
25mm x 7.5m	2,000kg	<b>-8120K</b>
25mm x 7.5m	2,500kg	<b>-8140K</b>
50mm x 8.0m	5,000kg	<b>-8180K</b>

### Tarpaulin Cord Ball Ties

Manufactured from hard-wearing and rot-proof 5mm elastic shock cord with a multi-stranded elastic core, the outer polythene cover is UV-resistant and weatherproof.

PACK OF  
**10**



Size	Order Code <b>MTL-978</b>
150mm (6")	<b>-9160K</b>
250mm (10")	<b>-9200K</b>

### Hook-Ended Two-Part Load Strap

Supplied as two pieces. Designed to safely secure cargo for transport.



Size (Width x Length)	Min. Breaking load	Order Code <b>MTL-978</b>
25mm x 4.0m	1,500kg	<b>-8300K</b>
25mm x 4.5m	800kg	<b>-8340K</b>
25mm x 4.5m	1,000kg	<b>-8360K</b>
25mm x 6.0m	1,000kg	<b>-8380K</b>
25mm x 6.0m	1,500kg	<b>-8400K</b>
35mm x 6.0m	3,000kg	<b>-8420K</b>
35mm x 7.5m	2,000kg	<b>-8440K</b>
35mm x 7.5m	2,500kg	<b>-8460K</b>
50mm x 8.0m	5,000kg	<b>-8500K</b>
50mm x 9.0m	4,000kg	<b>-8540K</b>
50mm x 9.0m	5,000kg	<b>-8560K</b>
50mm x 10.0m	4,000kg	<b>-8600K</b>
50mm x 10.0m	5,000kg	<b>-8620K</b>

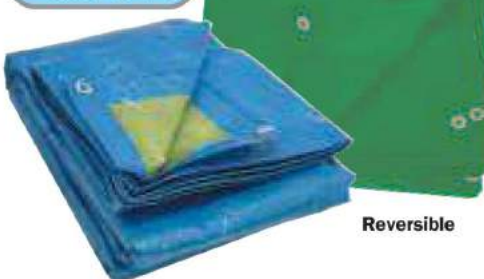
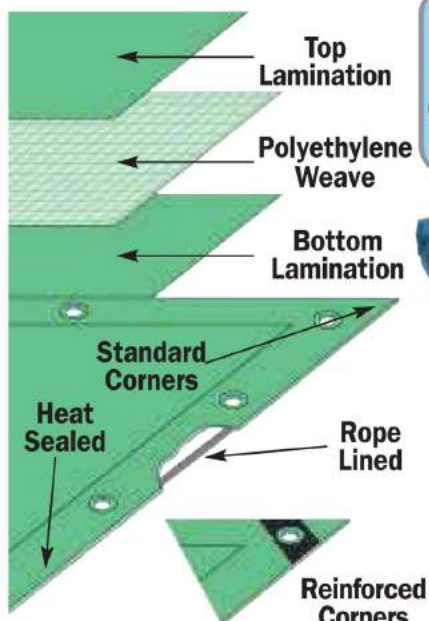


## MATLOCK Matlock Tarpaulins

For industry, construction, agriculture, marine, domestic and recreation. Washable, shrinkproof, rotproof, tear-resistant and UV stabilised to prevent fading. Ideal ground cover for camping, hunting or fishing. Double-laminated polyethylene weave with rope lined hems which are heat-sealed with aluminium eyelets at one metre intervals. Available in green or reversible blue/green.

**Standard Duty:** 120g with standard corners.

**Heavy Duty:** 160g with reinforced corners.



Size (m)	Order Code MTL-984 Blue/Green
	<b>Standard-Duty 120g</b>
2.7 x 3.6	-1020K
4.5 x 6.0	-1060K
5.4 x 7.0	-1080K
7.0 x 9.0	-1100K

Size (m)	Order Code MTL-984 Green
	<b>Standard-Duty 120g</b>
1.2 x 1.8	-5000K
1.8 x 1.8	-5010K
1.8 x 2.4	-5020K
2.5 x 3.5	-5030K
3.6 x 5.0	-5040K
3.6 x 7.0	-5050K
4.0 x 5.0	-5060K
5.0 x 6.0	-5070K
5.4 x 7.2	-5080K
7.0 x 9.0	-5090K
7.0 x 11.0	-5100K
	<b>Heavy-Duty 160g</b>
1.2 x 1.8	-5400K
1.6 x 2.2	-5405K
2.5 x 3.5	-5430K
3.6 x 5.0	-5440K
3.6 x 7.0	-5450K
4.0 x 5.0	-5460K
5.4 x 7.2	-5480K
10.0 x 10.0	-5520K

SITE MAINTENANCE

## RUTLAND Quality Gardening Tools

### Garden Wheelbarrow

Standard - suitable for all garden and domestic use. Three piece tubular steel frame. 0.7mm pressed steel pan with rolled safety edges. Plastic handles for user comfort. Green stove enamelled, corrosion-resistant easy clean finish. Pneumatic tyred disc wheel.

**Capacity:** 85ltr (3cu.ft.).



Tyre Type	Weight each	Order Code RTL-985
Pneumatic	13kg	-2600K

### Heavy Duty Garden Bag

Garden bag with a unique strengthener around the mouth and three handle design. Tough woven polyethylene fabric with tear resistant stitching for longer usage. UV treated for extra long life and stays rot-proof for years.

**Capacity:** 170 litre.

Order Code  
**RTL-523**

**-9800K**



### Lightweight Garden Bag

Garden bag with two handles. Made from rot-proof woven polyethylene fabric with tear resistant stitching for durability.

**Capacity:** 160 litre

Order Code  
**RTL-523**

**-4700K**



**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**

801



**MATLOCK**
**Stair Climbing Sack Truck**

Tubular steel with double framed sides for increased rigidity. Looped handles provide knuckle protection and positive grip in various positions. Fitted with 400mm long footiron, three star wheeling with 125mm diameter polypropylene tyred wheels for regular contact with stairs and curbs.

**Height x width:**  
1070 x 610mm.  
**Capacity:** 200kg.



**200kg Capacity**

Order Code  
**MTL-985**  
**-2020K**

**Heavy Duty 'P' Handle Sack Truck**

'P' style handle for easy handling of heavy objects. Handle design keeps truck horizontal when laid flat. All tubular steel construction. Large 250mm pneumatic wheels for stable transport over uneven or stepped surfaces. Self-assembly wheels.

**Capacity:** 200kg.  
**Weight:** 8.8kg



**200kg Capacity**

Order Code  
**MTL-985**  
**-1610K**


**Heavy Duty Sack Trucks**

High quality tubular steel frame with solid rubber tyres and hand grips on the handles. Self-assembly wheels.



**100kg Capacity**

**200kg Capacity**



Capacity	Colour	Weight each	Order Code
100kg	Blue	10.3kg	<b>CTL-985</b>
200kg	Red	11.7kg	<b>-2000D</b>
			<b>-2010E</b>

**Heavy Duty 3-in-1 Truck**

A multi-purpose truck which easily and quickly converts from a basic sack truck to a four wheel sack truck or platform truck.

**Height - horizontal:** 260mm,  
**- vertical:** 1280mm.

**Width:** 470mm.  
**Capacity:** 250kg.



**250kg Capacity**

Order Code  
**MTL-985**  
**-0998K**



## MATLOCK Platform Trucks

Strong and manoeuvrable on two fixed and two swivel 200mm rubber castors. Sides and ends are fixed in position supported by a steel frame. The deck and sides are of varnished plywood.

**Dimensions (L x W):** 1000 x 700mm.  
**Capacity:** 500kg.



Order Code  
**MTL-985**  
**-1500K**

### Step-A-Truck

Simple and easy to convert from steps to sack trucks. Neat and compact with large toe plate and wide step treads.

Comply to **EN131** Standard.

**Toe plate size:** 390 x 280mm.

**Tread size:** 375 x 210mm.

**Dimensions: (W x D x H)**

**2 tread:**

**Folded:** 460 x 70 x 990mm.

**Sack truck:** 480 x 490 x 990mm.

**Step unit:** 470 x 530 x 920mm.

**Platform height:** 490mm.

**3 Tread:**

**Folded:** 470 x 90 x 1265mm.

**Sack truck:** 490 x 450 x 1265mm.

**Step unit:** 470 x 735 x 1190mm.

**Platform height:** 750mm.



Description	Order Code
2 Tread Step	<b>MTL-985</b> <b>-1820K</b>
3 Tread Step	<b>-1840K</b>

### Three Position Platform/Sack Truck

Large 200mm solid rubber sack truck wheels. Two 360° platform truck castors for easy manoeuvrability. Removable handle for easy storage. Flat packed for user assembly.

**Capacity:** 80kg.



Order Code  
**MTL-985**  
**-2090K**

### Folding Platform Truck

Lightweight aluminium frame. Telescopic handle and extendable platform. Folds flat. 2x fixed and 2x 360° 100mm diameter solid rubber castors.

**Base size (W x L):** 420 x 570/725mm.

**Capacity:** 150kg.



Order Code  
**MTL-985**  
**-3360K**

## HANDLING

### Folding Trolleys

Non-slip PVC load surface. Tubular steel handle folds flat for minimal storage space requirements. 2x fixed and 2x swivel castors for easy movement. PVC buffer strip on the platform edge to protect doors and furniture. Ideal for office environments.

**Capacities:** 150 and 300kg.



Capacity	Weight each	Order Code
150kg	8.5kg	<b>MTL-985</b> <b>-3600K</b>
300kg	15.2kg	<b>-2060K</b>

### Service Trolley

#### 3 Shelf Trolley

Super strong polyethylene moulded. Constructed from a non-conductive material which is unaffected by battery acid, solvents and cleaning solutions.

**Overall dimensions**

**(L x W x H):** 610 x 458 x 840mm.



Order Code  
**MTL-985**  
**-3220K**

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**



**GROUP 985 HANDLING**

**MATLOCK Access Platform**

Non-integrated working platform fitted with foldaway rear guard. Meets the requirements of **HSE Guidance Note PM28 (3rd Edition December 2005)**.

An economical and safe way to carry out non-routine maintenance tasks. Lifts 200kg or one man with tools. Comes with rated fixed safety harness anchor point within the safety cage. Fits most forklift trucks, is manufactured from steel and finished in safety yellow. Available 3 working days from receipt of order (mainland customers only).

**Specifications:**

800 x 800mm carry basket.  
Fitted with foldaway rear guard.  
Locking fork restraint.  
Lift up front gate bar.  
Fixed anchor point.

**Weight:** 68kg.

**Fork Dimensions:** 170 x 70mm.



SITE MAINTENANCE



**CARRIAGE FREE**  
UK MAINLAND

Order Code  
**MTL-985**

**-1430A**

**Pallet Trucks**

Fully sealed hydraulic system with pressure relief and overload valves. Three position trigger: lift-neutral-lower. Bushed in key areas with grease points and entry/exit rollers.

**National standards:** ISO3691-5:2014 and ISO3691-7:2011.

**Capacity:** 2500kg.

**Fork dimensions:** 160 x 50mm.

**Raised height:** 200mm.

**Lowered height:** 85mm.

**Steer wheels:** nylon 200 x 50mm.

**Load rollers:** tandem - 80 x 70mm.



Fork LxW  
(mm)

1150 x 540  
1150 x 685

Order Code  
**MTL-985**

**-1290K**  
**-1300K**

**Aluminium Folding Platform Steps**

Made from strong lightweight aluminium with non-slip treads and platform. Available in 3 and 4 step versions and featuring safety rail. Manufactured to **EN131** and able to handle a maximum load of 150kg.

**3 Tread - overall height including safety rail:**

**Opened:** 1234mm.

**Platform height:** 629mm.

**4 Tread - overall height including safety rail:**

**Opened:** 1452mm.

**Platform height:** 847mm.



**CARRIAGE FREE**  
UK MAINLAND

Product  
Number

No. of  
Treads

Platform  
Height

Order Code  
**MTL-939**

MFP03  
MFP04

3  
4

629mm  
847mm

**-5830K**  
**-5840K**

804

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**



# Z-Barrier™

**Effective solution that guarantees satisfactory BARRIER CONTROL in any environment**

Traditional systems for controlling people traffic using standard barriers connected via a chain or belt going pole to pole are associated with the continuous problems of maintaining a safe place to work. Even expanding barriers or self-retractable barriers could break, fall down or blow away exposing people to unnecessary and unacceptable risk. The cumbersome nature of the sturdier systems also limits their usability, making them less flexible and impairs their portability. These problems are magnified in areas that have to cope with work space restrictions and hazardous working conditions such as those found in the offshore gas and oil industry. Barriers are a key requirement of the Health and Safety (Safety Signs and Signals) Regulations.

The 'Z-Barrier' system is the most innovative improvement in temporary safety barriers and provides an effective solution that guarantees satisfactory barrier control in any work environment.

'Z-Barriers' are patent pending for the unique design that ensures barriers are prominent and remain in position, for all physical and environmental conditions.

Manufactured from a unique, reinforced PVC-based double-sided warning tape, with a high visibility day glow pattern on one face and a night reflective pattern on the other face.

These are the most visible barriers available on the market today. Quick and easy to put up, they are easily fastened to any anchor point or each other, providing a flexible barrier across any opening, around objects or in multiple directions. Elastic properties allow

'Z-Barriers' to expand and fit between points instead of being cut to length. They are inherently shock absorbing and resist any degree of wind load to prevent damage.



**The Immediate Barrier Solution**



Other signs available on request, specials can be made to order.

#### A4 Sign Pockets (shown above)

The flexible and robust sign pockets were designed to allow users to quickly and effectively create their own signage. All you need is a pen and paper. However we do supply a range of standard signs that will fit the pockets. The most popular designs are shown here.

Order Code  
**MTL-992**  
**-7010K**

#### Individual Z-Barriers



**Yellow/Black**

Size	Expansion Range	Order Code MTL-992
<b>White/Red</b>		
1	1 - 2m	-5010K
2	2 - 4m	-5020K
3	3 - 6m	-5030K
<b>Yellow/Black</b>		
1	1 - 2m	-9301K
2	2 - 4m	-9302K
3	3 - 6m	-9303K

#### Z-Barrier Starter Pack

Contents: 10x size 1, 5x size 2 and size 3 and 2x sign pockets.



Colour	Order Code MTL-992
White/Red	-9010K
Yellow/Black	-9322K

#### Z Barrier High Visibility Heavy Duty Bag

With two shoulder straps, a carry handle and a drawstring at the top.



Order Code  
**MTL-992**  
**-3500K**

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**



**MATLOCK**

**Post & Chain Barriers**

Ideal to cordon off an area or to form a channel for queuing. Suitable for warehouses, factories, offices, leisure venues etc. Support posts, bases and chain packs sold separately.

**Chain Support Post with Cap**

**Height:** 910mm. **Diameter:** 50mm.

Colour	Order Code
White/Red	<b>-2840D</b>
Yellow/Black	<b>-2860F</b>

**Chain Support Post Bases**

Colour	Weight (kg)	Order Code
Standard	1.9	<b>-2720B</b>
Heavy-Duty	3.3	<b>-2740D</b>

**25m Chains**

Colour	Chain Diameter	Order Code
Red/White	6mm	<b>-2500K</b>
Black/Yellow	6mm	<b>-2510K</b>
Red/White	8mm	<b>-2520K</b>
Black/Yellow	8mm	<b>-2530K</b>
Red/White	10mm	<b>-2540K</b>
Black/Yellow	10mm	<b>-2550K</b>



**PVC Insulation Tapes**

Extremely flexible with a good adhesion. For wire and cable insulation, bundling and reinforcing. Assorted colours for colour-coding cables. Flame retardant.

Manufactured to **BS 4J10** (Aero) and **BS 3924**.

**Roll length:** 33m.

**Box quantities:** 19mm = 40, 25mm = 30.

**Thickness:** 0.13mm (5mil).

**Adhesion:** 0.47kg/25mm. (16.5oz/1").

**Tensile strength:** 5.2kg/25mm (11.5lb/1").

**Elongation:** 150%.

**Breakdown voltage:** 5.5kV.

**Insulation class:** 80°C.

**\*Assorted Colours:** Black, white, red, blue, yellow, green/yellow, grey, brown.

19mm pack of 8 rolls.



Group **245**



Prices are per roll

Roll Size (W x L)	Colour	Box Qty	Order Code	Price/Roll	Price/Box
19mm x 33m	Grey	40	<b>-7400K</b>		
	Purple	40	<b>-7450K</b>		
	Orange	40	<b>-7500K</b>		
	Brown	40	<b>-7550K</b>		
	Black	40	<b>-7600K</b>		
	Blue	40	<b>-7650K</b>		
	Green	40	<b>-7700K</b>		
	Red	40	<b>-7750K</b>		
	White	40	<b>-7800K</b>		
	Yellow	40	<b>-7850K</b>		
	Green/Yellow	40	<b>-7950K</b>		
	Assorted* (8 Rolls)		<b>-8920K</b>		
	Black	30	<b>-8100K</b>		
	Blue	30	<b>-8150K</b>		
25mm x 33m	Green	30	<b>-8200K</b>		
	Red	30	<b>-8250K</b>		
	White	30	<b>-8300K</b>		
	Yellow	30	<b>-8350K</b>		

**Pipe Repair Tape**

Completely water and UV-resistant. Used to joint and repair a wide range of power and distribution cables up to 46kV. For above and below ground.



Roll Size (W x L)	Colour	Order Code
25mm x 10m	Black	<b>-0940K</b>

**Extra Wide PVC Insulation Tape**

Extremely flexible with a good adhesion. For wire and cable insulation, bundling and reinforcing. Flame retardant. Manufactured to **BS 4J10** (Aero) and **BS 3924**.



Roll Size (W x L)	Colour	Order Code
50mm x 33m	Black	<b>-8500K</b>
100mm x 33m	Black	<b>-8700K</b>



**TUFFSAFE****Fire Blankets**

Supplied in a quick release dispenser which can be attached to a wall near possible fire hazards. The blanket is manufactured from neoprene coated glass cloth. Conforms to **BS6575 1985** light duty. **B.A.F.E. approved**, Kitemarked to **BS EN1 869: 1997** and independently tested by the Loss Prevention Council. Guaranteed for five years. Unique patented 3-ply blanket material will effectively extinguish cooking oil fires.



Blanket Size	Order Code
1.8 x 1.2m	<b>-3020K</b>
1.8 x 1.8m	<b>-3040K</b>

**TUFFSAFE****HSE Standard First Aid Kits**

Suitable for the workplace.

**10 Person:**

For small work places up to 10 persons.

Supplied in a plastic box c/w handle. **Size:** 270 x 220 x 90mm.

**20 Person:**

For work places employing up to 20 persons.

Supplied in a plastic box c/w handle. **Size:** 270 x 220 x 90mm.

**50 Person:**

For work places employing up to 50 persons.

Supplied in a plastic box c/w handle. **Size:** 270 x 340 x 100mm.

**Contents Chart**

	10 Person	20 Person	50 Person
Guidance Leaflet	1	1	1
Individually Wrapped Sterile Adhesive Plasters	20	40	60
No. 16 Sterile Eye Pad	2	4	6
Triangular Bandage	4	6	8
Safety Pins	6	12	12
Medium Sterile Dressing, 12cm x 12cm	6	9	12
Large Sterile Dressing, 18cm x 18cm	2	3	4
Alcohol Free Cleansing Wipes	6	10	20
Disposable Gloves	1 pair	2 pairs	3 pairs

**SITE MAINTENANCE****10 Person Kit****20 Person Kit****50 Person Kit**

Size	Order Code	
	<b>TFF-996</b>	
10 Person	<b>-0710K</b>	N/A
20 Person	<b>-0720K</b>	N/A
50 Person	<b>-0730K</b>	N/A
<b>Refill Kits</b>		
10 Person	<b>-1420K</b>	N/A
20 Person	<b>-1430K</b>	N/A
50 Person	<b>-1440K</b>	N/A

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR****807**

© 2018





### Small Catering First Aid Kit

Supplied in a durable polypropylene plastic box with compartments. Secure lid helps protect contents against dust and moisture. A wall bracket is included, enabling kits to be positioned at first aid points but also easily released from the bracket. For up to 10 persons.

**Size:** 268 x 180 x 50mm.



#### Contents Chart -

#### Small Catering First Aid Kit

HSE Guidance Leaflet	1
Sterile 12 x 12cm Medium Dressing	6
Sterile 18 x 18cm Large Dressing	2
Non-woven Triangular Bandage	4
Nitrile Disposable Glove - Pair	1
Blue Dressing Assorted (Pack of 10)	2
Sterile No.16 Eye Dressing	2
Assorted Safety Pins (Pack of 6)	1
Sterile Moist Cleansing Wipe	10
Plastic Fingerstalls	3
Eye Wash Pods 20ml	2
Blue Visually Detectable Tape 2.5cm x 5m	1
Hydrogel Blotts (Single)	3
First Aid Scissors - Blunt/Blunt	1

Type	Weight each	Order Code	
Small	0.8kg	<b>TFF-996</b>	
		<b>-0750K</b>	N/A

### Burns Kit

The Tuffsafe Burns Kit comes in an attractive durable polypropylene red plastic box which is associated with burns treatment. It comes complete with a comprehensive range of water-based burns dressings which soothes and moisturises the burns area by inhibiting fluid loss.



#### Contents Chart -

#### First Aid - Burns Kit

HSE Guidance Leaflet	1
Sterile 12 x 12cm Medium Dressing	2
Sterile 18 x 18cm Large Dressing	2
Nitrile Disposable Glove - Pair	4
Safety Pins Assorted (Pack 12)	1
Sterile BurnSoothe Dressing 10 x 10cm	1
Sterile BurnSoothe Dressing 20 x 20cm	2
Sterile BurnSoothe Burn Blotts 3.5g	4
BurnSoothe Burn Relief Gel 50ml	1
Heavy Duty First Aid Snips	1

Size	Weight each	Order Code	
Large	120g	<b>-0820K</b>	N/A

### Lone Worker Kit

Essential First Aid Kit for someone working off-site or on the road.



#### Contents Chart - Lone Worker

HSE Guidance Leaflet	1
Sterile No.16 Eye Dressing	1
Sterile 12 x 12cm Medium Dressing	2
Sterile 18 x 18cm Large Dressing	1
Elite Washproof Plasters (Pack of 10)	1
Non-woven Triangular Bandage	2
Nitrile Disposable Glove - Pair	1
Assorted Safety Pins (Pack of 6)	1
Sterile Moist Cleansing Wipe	6

Order Code  
**TFF-996**

**-0500K** N/A



## TUFFSAFE Alcohol-free Cleansing Wipes

The alcohol-free solution cleanses and soothes cuts and grazes and prepares surrounding area for dressing, ensuring greater adhesion. Individual sachets.


**PACK OF  
100**

Order Code  
**TFF-996**  
**-1840K**

## Unmedicated Dressings

High quality absorbent dressings. Medium and large dressings are sterile. Eye pad and triangular bandage are non-sterile.



Description	Size	Pack Qty	Order Code TFF-996	
Dressings	120 x 120mm	6	-2670K	N/A
	180 x 180mm	6	-2680K	N/A
Eye Pad		10	-2000K	N/A
Triangular Bandage	90 x 127cm	6	-2600K	N/A

## Safety Pins

In assorted sizes.  
Pack of 60.


**PACK OF  
60**

Sizes	Order Code TFF-996
00, 0, 1	-3000K
0, 1, 2	-3020K

## Assorted Plasters

All the Tuffsafe® range of plasters are latex free, ventilated and sterile. Five assorted sizes per box. Individually wrapped.

**PACK OF  
100**


Type	Order Code TFF-996	
Blue - Detectable	-2490K	N/A
Stretch Fabric	-2510K	N/A
Waterproof	-2530K	N/A

## Finger Extension Plasters

Extra long plasters that offer greater protection for cuts and wounds to fingers. Pink fabric.

**Size:** 170 x 20mm. Individually wrapped.


**PACK OF  
50**

Type	Order Code TFF-996	
Stretch Fabric	-2560K	N/A

## KENNEDY

**new**

## Lens Cleaning Wipes for Spectacles and Goggles

2-ply soft, absorbent and strong wipes, ideal for nursing staff, laboratory technicians, cleaning spectacle and goggle lenses and for use in scientific areas. 76 wipes per pack.

**PACK OF  
10**


Wipe size (mm)	Order Code KEN-996	
110 x 210	-2100K	N/A

## Eye Wash Station Cabinet

Wall mounted eye wash station cabinet c/w 2x 500ml eye wash solution and 2x No.16 sterile eye pads.

**Weight:** 2.0kg.


**Group  
960**


Description	Order Code TFF-996	
Eye Wash Cabinet	-1950K	N/A
Replacement 500ml Eye Wash Solution	-1980K	N/A

