



# Fixed Dome Network Camera FD8371V/71EV



3MP • 1080p 60 fps • Smart IR • Corridor View  
Smart Stream • Smart Focus • Low Light

VIVOTEK FD8371V/71EV are professional outdoor dome network cameras offering 30 fps @ 3-Megapixel or 60 fps @ 1080p resolution with superb image quality.

As professional day/night cameras, FD8371V/71EV feature a Smart IR technology which provides the excellent ability of anti-overexposure and noise reduction to adjust the IR lighting intensity instantly based on environmental lighting change.

Featuring 3D Noise Reduction Technology, it enables the FD8371V/71EV to capture clear, polished video under low-light conditions, which also helps to reduce bandwidth from sensor noise. By combining with WDR Enhanced technology, users can identify image details in extremely bright as well as dark environments.


The FD8371V/71EV also feature Smart Stream Technology, which can be used to optimize resolution on a desired object or area to maximize bandwidth usage.

The FD8371V/71EV come with a P-iris lens, which controls the iris with extreme precision with its built-in stepper motor. By using software controls, the lens maintains the iris opening at an optimal level at all times, resulting in superior sharpness and depth of field as well as image quality. For installers, properly adjusting the focus of a megapixel network camera can be difficult due to the image detail. Thus, VIVOTEK has introduced the Smart Focus System to make installation and adjustment easier by allowing for remote focus and zoom adjustment.

The IP66-rated housing is designed to help the camera body withstand rain and dust and high pressure water jets from any direction while IK10-rated housing provide the protection against the vandal act and impact. Additionally, the wide temperature range further enhances the FD8371EV's performance and reliability in extremely cold or warm weather.

## Features

- 3-Megapixel CMOS Sensor
- 30 fps @ 2048x1536; 60fps @ 1920x1080
- Motorized, P-iris Lens & DC-iris
- Built-in IR Illuminators, Effective up to 20 Meters
- Smart IR Technology to Avoid Overexposure
- Smart Stream to Optimize Bandwidth Efficiency
- 3D Noise Reduction for Low-light Conditions
- -50°C ~ 50°C Wide Temperature Range for Extreme Weather Conditions (FD8371EV)
- Real-time H.264 and MJPEG Compression (Dual Codec)
- Smart Focus System for Remote and Precise Focus Adjustment
- Weather-proof IP66-rated and Vandal-proof IK10-rated Housing
- Built-in 802.3af Compliant PoE
- Built-in MicroSD/SDHC/SDXC Card Slot for On-board Storage
- Supreme Night Visibility
- Video Rotation for Corridor View

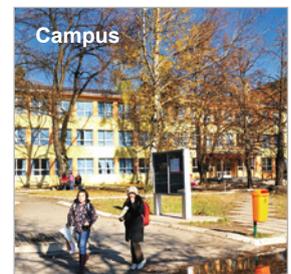


## Technical Specifications

Model	FD8371V/71EV
<b>System Information</b>	
CPU	Multimedia SoC (System-on-Chip)
Flash	256 MB
RAM	512 MB
<b>Camera Features</b>	
Image Sensor	1/2.8" Progressive CMOS
Maximum Resolution	2048x1536
Lens Type	Vari-focal, remote focus
Focal Length	f = 3 ~ 10mm
Aperture	F1.3 ~ F2.5
Auto-iris	P-iris / DC-iris (Reserved)
Field of View	32° ~ 99° (Horizontal) 24° ~ 72° (Vertical) 40° ~ 128° (Diagonal)
Shutter Time	1/5 sec. to 1/8000 sec.
Physical Adjustment of Camera Angel	Pan: 348°, Tilt: 65°, Rotation: 350°
WDR Technology	WDR Enhanced
Day/Night	Removable IR-cut filter for day & night function Smart IR Technology to Avoid Overexposure
Minimum Illumination	0.1 Lux @ F1.3 (Color) 0.001 Lux @ F1.3 (B/W)
Pan/tilt/zoom Functionalities	ePTZ: 48x digital zoom (4x on IE plug-in, 12x built in)
IR Illuminators	Built-in IR illuminators, effective up to 20 meters IR LED*4, with Smart IR Technology
On-board Storage	MicroSD/SDHC/SDXC card slot
<b>Video</b>	
Compression	H.264, MJPEG
Maximum Frame Rate	H.264: 30 fps at 2048x1536 60 fps at 1920x1080 MJPEG: 30 fps at 2048x1536 60 fps at 1920x1080
Maximum Streams	4 simultaneous streams
S/N Ratio	58 dB
Dynamic Range	59 dB
Video Streaming	Adjustable resolution, quality and bitrate
Image Settings	Adjustable image size, quality and bit rate Time stamp, text overlay, flip & mirror Configurable brightness, contrast, saturation, sharpness, white balance, exposure control, gain, backlight compensation, privacy masks, scheduled profile settings, audio detection, 3D noise reduction, smart stream, seamless recording, video rotation
<b>Audio</b>	
Audio Capability	Two-way Audio (full duplex)
Compression	AAC, G.711, G.726
Interface	External microphone input and output
<b>Network</b>	
Users	Live viewing for up to 10 clients
Protocols	IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, 802.1X
Interface	10Base-T/100BaseTX Ethernet (RJ-45) *It is highly recommended to use standard Cat. 5e & Cat. 6 cables which are compliant with the 3P/ETL standard.
ONVIF	Supported, specification available at <a href="http://www.onvif.org">www.onvif.org</a>

<b>Intelligent Video</b>	
Video Motion Detection	Triple-window video motion detection
<b>Alarm and Event</b>	
Alarm Triggers	Video motion detection, manual trigger, digital input, periodical trigger, system boot, recording notification, camera tampering detection, audio detection
Alarm Events	Event notification using digital output, HTTP, SMTP, FTP and NAS server File upload via HTTP, SMTP, FTP and NAS server
<b>General</b>	
Smart Focus System	Remote focal & focus control
Connectors	RJ-45 cable connector for Network/PoE connection Audio input Audio output AC 24V power input/DC 12V power input Digital input*1 Digital output*1 Analog video output
LED Indicator	System power and status indicator
Power Input	24V AC 12V DC IEEE 802.3af PoE Class 3
Power Consumption	FD8371V: Max. 10.92 W (DC 12V) Max. 12.25 W (AC 24V) Max. 12.95 W (PoE) FD8371EV: Max. 28 W (DC 12V) Max. 34 W (AC 24V) Max. 12.95 W (PoE)
Dimensions	Ø: 173 mm x 115 mm
Weight	Net: 1,240 g
Casing	Weather-proof IP66-rated housing Vandal-proof IK10-rated housing
Safety Certifications	CE, LVD, FCC Class A, VCCI, C-Tick, UL, KCC
Operating Temperature	FD8371V: Starting Temperature: -10°C ~ 50°C (14°F ~ 122°F) Working Temperature: -20°C ~ 50°C (-4°F ~ 122°F) FD8371EV: PoE Working Temperature: -10°C ~ 50°C (14°F ~ 122°F) Cold Startup Temperature: -10°C (14°F) DC12V/AC24V Working Temperature: -50°C ~ 50°C (-58°F ~ 122°F) Cold Startup Temperature: -40°C (-40°F)
Warranty	24 months
<b>System Requirements</b>	
Operating System	Microsoft Windows 7/Vista/XP/2000
Web Browser	Mozilla Firefox 7~10 (Streaming only) Internet Explorer 7.x or 8.x
Other Players	VLC: 1.1.11 or above Quicktime: 7 or above
<b>Included Accessories</b>	
CD	User's manual, quick installation guide, Installation Wizard 2, ST7501 32-channel recording software
Others	Quick installation guide, warranty card, alignment sticker, mounting plate, L-type hex key wrench, desiccant bag, DC connector, screws, hex nut, double-sided Tape, AV cable, waterproof connector, bushing, software CD

## Dimensions

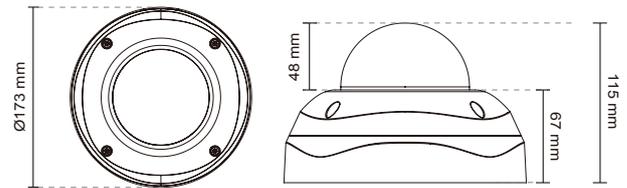

## Compatible Accessories

### Mounting Kits



**AM-51A**  
Mounting Adapter



**AM-520**  
Mounting Adapter



**AM-215**  
L Shape Bracket



**AM-516**  
Adaptor Ring

All specifications are subject to change without notice. Copyright © VIVOTEK INC. All rights reserved.

Distributed by:



VIVOTEK INC.  
6F, No.192, Lien-Cheng Rd., Chung-Ho,  
New Taipei City, 235, Taiwan, R.O.C.  
T: +886-2-82455282 F: +886-2-82455532  
E: sales@vivotek.com

VIVOTEK USA  
2050 Ringwood Avenue,  
San Jose, CA 95131  
T: 408-773-8686 F: 408-773-8298  
E: salesusa@vivotek.com

VIVOTEK Europe  
Randstad 22-133, 1316BW Almere,  
The Netherlands  
T: +31(0)36-5298-434  
E: sales@vivotek.com

Ver 1.7