



**BATTERY CHARGER PORTABLE POWER
DRILLING
FASTENING
TRANSPORTATION
CARPENTRY
CONCRETE
METALWORKING
OUTDOOR POWER EQUIPMENT
JOBSITE CLEANUP
PLUMBING & MECHANICAL
ELECTRICAL & POWER UTILITY
LASER
LIGHTING
SYSTEM ENHANCEMENT
JOBSITE APPAREL
HANDTOOLS
PACKOUT & STORAGE
PERSONAL PROTECTIVE EQUIPMENT
ACCESSORIES**



ALLIANCE SUPPLIES SDN.BHD.

www.alliance-supplies.com | www.alliancesuppliesonline.com.my | info@alliance-supplies.com | T:+606 3338889/8887/8898

M18

M18 FUEL
RIVET TOOL

M18 FRT

Voltage	18V
Max. Pulling Force (N)	20000
Rivet Diameter Range (mm)	4.8-7.0
Rivet Diameter (mm)	4.8, 6.0, 6.4, 7.0
Stroke Length (mm)	30
Weight w/ 2.0Ah Battery Pack (kg)	2.5

**M18 FUEL**
1/4" HEX IMPACT DRIVER

M18 FID3

Voltage	18V
No Load Speed (rpm)	0-1700, 0-3000 0-3900, 0-3300
Impact Rate (ipm)	0-1400, 0-3600 0-4400
Max. Bolt Diameter	M16
Max. Torque (Nm)	226
Tool Reception	1/4" Double End Bit
Weight w/ 5.0Ah Battery Pack (kg)	1.75

**M18 FUEL SURGE**
1/4" HEX HYDRAULIC DRIVER

M18 FQID

Voltage	18V
No Load Speed (rpm)	0-900, 0-2100 0-3000, 0-3000
Impact Rate (ipm)	0-1800, 0-2900 0-4000, 0-4000
Max. Bolt Diameter	M14
Max. Torque (Nm)	50
Tool Reception	1/4" Double End Bit
Weight w/ 5.0Ah Battery Pack (kg)	1.7

**M18 FUEL**
DRYWALL SCREW GUN

M18 FSGC / FSG

Voltage	18V
No Load Speed (rpm)	4500
Torque (Nm)	13
Tool Reception	1/4" HEX
Max. Screw size (mm)	6
Weight w/ 2.0Ah Battery Pack (kg)	1.6 (M18 FSG)
Weight w/ 2.0Ah Battery Pack (kg)	2.0 (M18 FSGC)

**M18 FUEL**
1/2" COMPACT IMPACT WRENCH

M18 FIW212

Voltage	18V
No Load Speed (rpm)	0-900, 0-1650, 0-2400, 0-1200
Impact Rate	0-1000, 0-2400, 0-3500, N/A
Max. Bolt Diameter	M18
Anvil Type	1/2" Square
(Friction Ring + Through Hole)	
Max. Torque (Nm)	339
Weight w/ 5.0Ah Battery Pack (kg)	1.8

**M18 FUEL**
3/8" COMPACT IMPACT WRENCH

M18 FIW2F38

Voltage	18V
No Load Speed (rpm)	0-800, 0-1650, 0-2400, 0-1000
Impact Rate	0-1000, 0-2400, 0-3500, N/A
Max. Bolt Diameter	M18
Anvil Type (Friction Ring)	3/8" Square
Max. Torque (Nm)	339
Weight w/ 5.0Ah Battery Pack (kg)	1.8

**M18 FUEL 1"**
HIGH TORQUE IMPACT WRENCH

M18 ONEFHIWF1

Voltage	18V
No Load Speed (rpm)	0-950, 0-1080, 0-1370, 0-1670
Impact Rate (ipm)	0-1350, 0-1650, 0-2100, 0-2500
Max. Bolt Diameter	M42
Max. Nut Busting Torque (Nm)	2440
Max. Torque (Nm)	2033
Anvil Type	1" Square
(Friction Ring & Through Hole)	
Weight w/ 8.0Ah Battery Pack (kg)	5.9

**M18 FUEL 1/2" HIGH TORQUE**
IMPACT WRENCH w/ FRICTION RING

M18 FHIW2F12

Voltage	18V
No Load Speed (rpm)	0-700, 0-1300 0-2000, 0-2000
Impact Rate (ipm)	0-1300, 0-2200 0-2400, 0-2400
Max. Bolt Diameter	M36
Max. Nut Busting Torque (Nm)	2169
Max. Torque (Nm)	1627
Tool Reception	1/2" Square
Weight w/ 6.0Ah Battery Pack (kg)	3.63kg



M18 FUEL 1/2" MID TORQUE IMPACT WRENCH

M18 FMTIW2F12

Voltage	18V
No Load Speed (rpm)	0-1250, 0-1950, 0-2575, 0-1325
Impact Rate	0-900, 0-2100, 0-3100, N/A
Max. Bolt Diameter	M22
Anvil Type (Friction Ring)	1/2" Square
Max. Nut Busting Torque (Nm)	881
Weight w/ 5.0Ah Battery Pack (kg)	2.3



M18 FUEL 1" D-HANDLE HIGH TORQUE IMPACT WRENCH

M18 ONEFHIWF1DS

Voltage	18V
No Load Speed (rpm)	0-600, 0-700, 0-900, 0-1200
Impact Rate (ipm)	0-750, 0-930, 0-1200, 0-1440
Max. Bolt Diameter	M48
Max. Nut Busting Torque (Nm)	2711
Max. Torque (Nm)	2576
Anvil Type (Friction Ring)	1" Square
Weight w/ 12.0Ah Battery Pack (kg)	11.34



M18 FUEL 3/4" HIGH TORQUE IMPACT WRENCH

M18 ONEFHIWF34

Voltage	18V
No Load Speed (rpm)	0-800, 0-1300 0-1800, 0-1800
Impact Rate (ipm)	0-850, 0-1850 0-2400, 0-2400
Max. Bolt Diameter	M33
Max. Nut Busting Torque (Nm)	2032
Max. Torque (Nm)	1627
Anvil Type (Friction Ring)	3/4" Square
Weight w/ 5.0Ah Battery Pack (kg)	3.5



M18 FUEL 1" D-HANDLE EXTENDED ANVIL HIGH TORQUE IMPACT WRENCH

M18 ONEFHIWF1D


Voltage	18V
No Load Speed (rpm)	0-600, 0-700, 0-900, 0-1200
Impact Rate (ipm)	0-750, 0-930, 0-1200, 0-1440
Max. Bolt Diameter	M48
Max. Nut Busting Torque (Nm)	2711
Max. Torque (Nm)	2576
Anvil Type (Friction Ring)	1" Square
Weight w/ 12.0Ah Battery Pack (kg)	12.34



M18 FUEL 1" RAILWAY IMPACT WRENCH

M18 FHIWF1R

Voltage	18V
No Load Speed (rpm)	0-1000, 0-1400 0-1670, 0-1670
Impact Rate (ipm)	0-1750, 0-2150 0-2500, 0-2500
Max. Bolt Diameter	M 30
Max. Nut Busting Torque (Nm)	2000
Max. Torque (Nm)	2000
Tool Reception	1" Square
Weight w/ 12.0Ah Battery Pack (kg)	7.8

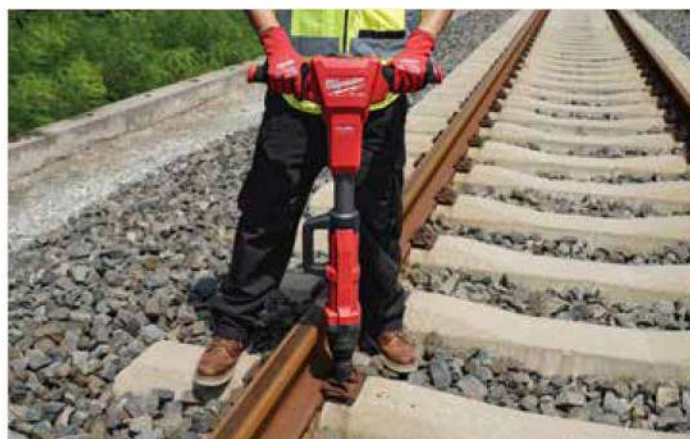



UNRIVALED ACCESS

- Lowest Profile With Socket
- Easily Accessible F/R Shuttle
- Longest Reach In Tight Spaces

M12 FUEL INSIDER PASS-THROUGH RATCHET



UP TO 81NM MAX TORQUE

- Best Combination of Power & Speed
- Break Free Stubborn Fasteners

ULTIMATE VERSATILITY

- Compatible With 1/4", 3/8", and 1/2" Drive Sockets, Plus 1/4" Hex Bits
- Pass-through Capable 8mm to 15mm
- Metric and Sae Sets Available



MORE POWER DENSE

- Up to 2,169Nm of Nut-busting Torque & 1,627Nm of Fastening Torque W/ Forge 6.0 Ah
- Best Combination of Power and Size

M18 FUEL

**1/2" HIGH TORQUE
IMPACT WRENCH**

UP TO 51MM SHORTER LENGTH

- More Compact. Greater Access in Tight Spaces
- 193 mm in Overall Length

FASTER REMOVAL SPEED

- Maximized Productivity on the Jobsite & in the Shop
- Best-in-class Application Speeds W/ Forge 6.0 Ah
- Tackle More Demanding Applications Without Sacrificing Time and Effort

M18 1/2" COMPACT IMPACT WRENCH

M18 BIW12

Voltage	18V
No Load Speed (rpm)	0-2450
Impact Rate (ipm)	0-3350
Max. Bolt Diameter	M16
Max. Torque (Nm)	240
Anvil Type (Multi-Fit)	1/2" Square
Weight w/ 4.0Ah Battery Pack (kg)	1.9



M18 COLLATED ATTACHMENT

Voltage	18V
Wood Screws (mm)	25-55



M18 1/2" HEAVY DUTY IMPACT WRENCH WITH PIN DETENT / FRICTION RING

HD18 HIW / HD18 HIWF

Voltage	18V
No Load Speed (rpm)	0-1900
Impact Rate (ipm)	0-2200
Max. Bolt Diameter	M20
Max. Torque (Nm)	610
Anvil Type (Pin Detent / Friction Ring)	1/2" Square
Weight w/ 4.0Ah Battery Pack (kg)	3.0



M18 BRUSHED RIGHT ANGLE IMPACT DRIVER

M18 BRAID

Voltage	18V
No Load Speed Gear 1 (rpm)	0-1500
No Load Speed Gear 2 (rpm)	0-2250
Impact Rate Gear 1 (ipm)	0-2400
Impact Rate Gear 2 (ipm)	0-3400
Max. Bolt Diameter	M18
Max. Torque (Nm)	81
Tool Reception	1/4" Hex
Weight w/ 5.0Ah Battery Pack (kg)	1.8



M18 COMPACT RIGHT ANGLE IMPACT WRENCH

M18 BRAIW

Voltage	18V
No Load Speed Gear 1 (rpm)	0-1500
No Load Speed Gear 2 (rpm)	0-2250
Impact Rate Gear 1 (ipm)	0-2400
Impact Rate Gear 2 (ipm)	0-3400
Max. Bolt Diameter	M18
Max. Torque (Nm)	76
Anvil Type (Friction Ring)	3/8" Square
Weight w/ 4.0Ah Battery Pack (kg)	1.9



M18 1/4" HEX COMPACT BRUSHLESS IMPACT DRIVER

M18 BLIDR


Voltage	18V
No Load Speed (RPM)	0 - 1250 0 - 2400 0 - 3600
Impact Rate (IPM)	0 - 2500 0 - 4700 0 - 4900
Max. Bolt Diameter	TBC
Max. Torque (Nm)	192
Tool Reception	1/4" Double End Bit
Weight w/ 4.0Ah Battery Pack (kg)	1.5



M18 1/4" HEX COMPACT IMPACT DRIVER

M18 BID

Voltage	18V
No Load Speed Gear 1 (rpm)	0-2000
No Load Speed Gear 2 (rpm)	0-2750
Impact Rate Gear 1 (ipm)	0-2450
Impact Rate Gear 2 (ipm)	0-3450
Max. Bolt Diameter	M14
Max. Torque (Nm)	180
Tool Reception	1/4" Double End Bit
Weight w/ 4.0Ah Battery Pack (kg)	1.7

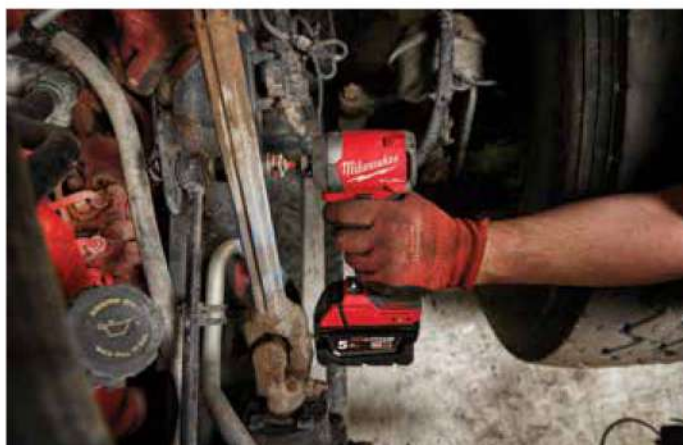

M12

M12 FUEL 1/4" HEX IMPACT DRIVER

M12 FID2

Voltage	12V
No Load Speed (rpm)	0-1700, 0-2900 0-3600, 0-3600
Impact Rate (ipm)	0-4000
Max. Bolt Diameter	M14
Max. Torque (Nm)	170
Tool Reception	1/4" Double End Bit
Weight w/ 6.0Ah Battery Pack (kg)	1.15



M12 FUEL 1/4" EXTENDED REACH HIGH SPEED RATCHET

M12 FHIR14LR

Voltage	12V
No Load Speed (rpm)	450
Anvil Type	1/4" Square
Length (mm)	346
Max. Torque (Nm)	47
Weight w/ 2.0 Ah Battery Pack (kg)	1.06



M12 FUEL SURGE 1/4" HEX HYDRAULIC DRIVER

M12 FQID

Voltage	12V
No Load Speed (rpm)	0-1100, 0-2200 0-3200, 0-3200
Impact Rate (ipm)	0-950, 0-2200 0-3400, 0-3400
Length (mm)	140
LED Light	Yes
Fuel Gauge	Yes
Max. Torque (Nm)	50
Weight w/ 6.0Ah Battery Pack (kg)	1.3



M12 FUEL 1/4" HIGH SPEED RATCHET

M12 FHIR14

Voltage	12V
No Load Speed (rpm)	0-450
Anvil Type	1/4" Square
Length (mm)	272
Max. Torque (Nm)	47
Weight w/ 2.0Ah Battery Pack (kg)	1



M12 FUEL 1/2" IMPACT RATCHET

M12 FIR12

Voltage	12V
No Load Speed (rpm)	0-175
Anvil Type	1/2" Square
Length (mm)	318
Max. Torque (Nm)	81
Weight w/ 2.0Ah Battery Pack (kg)	1.54



M12 FUEL INSIDER PASS-THROUGH RATCHET

M12 FPTR

Voltage	12V
No Load Speed (rpm)	350
Tool Reception	1/2", 3/8", 1/4" Square, 1/4" Hex Bits
Length (mm)	404
Max. Torque (Nm)	81
Weight w/ 2.5 Ah Battery Pack (kg)	1.22



M12 FUEL 3/8" EXTENDED REACH HIGH SPEED RATCHET

M12 FHIR38LR

Voltage	12V
No Load Speed (rpm)	450
Anvil Type	3/8" Square
Length (mm)	364
Max. Torque (Nm)	47
Weight w/ 2.0 Ah Battery Pack (kg)	1.1



M12 FUEL 3/8" EXTENDED REACH RATCHET

M12 FIR38LR

Voltage	12V
No Load Speed (rpm)	0-200
Anvil Type	3/8" Square
Length (mm)	384
Max. Torque (Nm)	75
Weight w/ 2.0Ah Battery Pack (kg)	1.4



M12 FUEL 3/8" HIGH SPEED RATCHET

M12 FHIR38

Voltage	12V
No Load Speed (rpm)	0-450
Anvil Type	3/8" Square
Length (mm)	272
Max. Torque (Nm)	47
Weight w/ 2.0Ah Battery Pack (kg)	1



M12 FUEL 1/2" DIGITAL TORQUE WRENCH

M12 ONEFTR12

Voltage	12V
No Load Speed (rpm)	0-100
Anvil Type	1/2" Square
Accuracy	+/- 2% CW
Calibration	1 Year or 5000 Cycles
Length (mm)	587
Max. Torque (Nm)	17-203
Weight w/ 2.0Ah Battery Pack (kg)	2.5



M12 FUEL 3/8" COMPACT IMPACT WRENCH

M12 FIW38

Voltage	12V
No Load Speed (rpm)	0-1200, 0-1800 0-2700, 0-2700
Impact Rate (ipm)	0-1100, 0-2100 0-3200
Max. Bolt Diameter	M16
Anvil Type (Friction Ring)	3/8" Square
Max Torque (Nm)	339
Weight w/ 6.0Ah Battery Pack (kg)	1.37



M12 FUEL 3/8" DIGITAL TORQUE WRENCH

M12 ONEFTR38

Voltage	12V
No Load Speed (rpm)	0-100
Anvil	3/8"
Accuracy	+/- 2% CW
Calibration	1 Year or 5000 Cycles
Length (mm)	582
Max. Torque (Nm)	13.6-136
Weight w/ 2.0Ah Battery Pack (kg)	2.5



M12 FUEL 1/2" COMPACT IMPACT WRENCH

M12 FIWF12

Voltage	12V
No Load Speed (rpm)	0-1200, 0-1800 0-2700, 0-2700
Impact Rate (ipm)	0-1100, 0-2100 0-3200
Max. Bolt Diameter	M16
Anvil Type (Friction Ring)	1/2" Square
Max. Torque (Nm)	339
Weight w/ 6.0Ah Battery Pack (kg)	1.37



M12 FUEL 1/2" RIGHT ANGLE IMPACT WRENCH

M12 FRAIWF12

Voltage	12V
No Load Speed (rpm)	0-1550, 0-2300, 0-3000
Impact Rate (ipm)	0-1350, 0-2700, 0-3600
Max Bolt Diameter	M16
Anvil Type (Friction Ring)	1/2" Square
Max Torque (Nm)	300
Weight w/ 3.0Ah Battery Pack (kg)	1.5



M12 FUEL 3/8" RIGHT ANGLE IMPACT WRENCH

M12 FRAIWF38

Voltage	12V
No Load Speed (rpm)	0-1550, 0-2300, 0-3000
Impact Rate (ipm)	0-1350, 0-2700, 0-3600
Max Bolt Diameter	M16
Anvil Type (Friction Ring)	3/8" Square
Max Torque (Nm)	300
Weight w/ 3.0Ah Battery Pack (kg)	1.5



M12 1/2" SQUARE COMPACT IMPACT WRENCH

M12 BIW12

Voltage	12V
No Load Speed (rpm)	0-2500
Impact Rate (ipm)	0-3300
Max. Bolt Diameter	M12
Anvil Type (Pin Detent)	1/2" Square
Max. Torque (Nm)	138
Weight w/ 2.0 Ah Battery Pack (kg)	1.1



M12 SUBCOMPACT BRUSHLESS IMPACT DRIVER

M12 BLIDRC

Voltage	12V
No Load Speed (rpm)	0-3000
Impact Rate (ipm)	0-4100
Max. Bolt Diameter	M14
Tool Reception	1/4" Double End Bit
Max. Torque (Nm)	124
Weight w/ 2.0 Ah Battery Pack (kg)	0.79



M12 3/8" SUB COMPACT IMPACT RATCHET

M12 IR

Voltage	12V
No Load Speed (rpm)	0-250
Anvil Type	3/8" Square
Length (mm)	274
Max. Torque (Nm)	47
Weight w/ 2.0Ah Battery Pack (kg)	0.9



M12 1/4" HEX COMPACT DRIVER

M12 BD

Voltage	12V
No Load Speed Gear 1 (rpm)	0-400
No Load Speed Gear 2 (rpm)	0-1500
Tool Reception	1/4" Hex
Max. Drilling Steel (mm)	10
Max. Drilling Wood (mm)	20
Max. Torque (Nm)	38
Weight w/ 2.0Ah Battery Pack (kg)	1.0



M12 1/4" HEX COMPACT IMPACT DRIVER

M12 BID

Voltage	12V
No Load Speed (rpm)	0-2500
Impact Rate (ipm)	0-3300
Tool Reception	1/4" Hex Double End Bit
Max. Torque (Nm)	112
Weight w/ 2.0Ah Battery Pack (kg)	1.0



M12 1/4" HEX COMPACT 2 SPEED DRIVER

M12 CD

Voltage	12V
No Load Speed Gear 1 (rpm)	0-450
No Load Speed Gear 2 (rpm)	0-1700
Max. Drilling Steel (mm)	6.35
Max. Drilling Wood (mm)	25
Max. Torque (Nm)	44
Weight w/ 2.0Ah Battery Pack (kg)	1.4



M12 RIVET TOOL

M12 BPRT

Voltage	12V
Max. Pulling Force (N)	9000
Rivet Diameter Range (mm)	2.4-4.8
Rivet Diameter (mm)	2.4, 3.2, 4.0, 4.8
Stroke Length (mm)	20.32
Weight w/ 2.0Ah Battery Pack (kg)	2.1



M12 1/4" HEX RIGHT ANGLE IMPACT DRIVER

M12 BRAID

Voltage	12V
No Load Speed (rpm)	0-2425
Impact Rate (ipm)	0-3300
Tool Reception	1/4" Hex Single End Bit
Max. Torque (Nm)	68
Weight w/ 4.0Ah Battery Pack (kg)	1.1

