



**BATTERY CHARGER PORTABLE POWER
DRILLING
FASTENING
TRANSPORTATION
CARPENTRY
CONCRETE
METALWORKING
OUTDOOR POWER EQUIPMENT
JOBSITE CLEANUP
PLUMBING & MECHANICAL
ELECTRICAL & POWER UTILITY
LASER
LIGHTING
SYSTEM ENHANCEMENT
JOBSITE APPAREL
HANDTOOLS
PACKOUT & STORAGE
PERSONAL PROTECTIVE EQUIPMENT
ACCESSORIES**



ALLIANCE SUPPLIES SDN.BHD.

www.alliance-supplies.com | www.alliancesuppliesonline.com.my | info@alliance-supplies.com | T:+606 3338889/8887/8898

M18

M18 FUEL 165MM CIRCULAR SAW

M18 CCS55

Voltage	18V
No Load Speed (rpm)	0-5000
Blade Diameter (mm)	165
Bore Size (mm)	15.87
Max. Cutting Depth 90° (mm)	55
Max. Cutting Depth 45° (mm)	41
Weight w/ 5.0Ah Battery Pack (kg)	3.2



M18 FUEL TRACK SAW

M18 FPS55

Voltage	18V
No Load Speed (rpm)	2,500 - 5,600
Blade Diameter (mm)	165
Bore Size (mm)	20
Max Cutting Depth w/ Guiderail (0° / 45°) (mm)	54 / 44
Max. Cutting Depth (mm) w/o Guiderail (0° / 45°)	59 / 44
Weight without Battery (kg)	4.2



M18 FUEL BELT SANDER

M18 FBTS75

Voltage	18V
No Load Belt Speed (m/min)	210 - 410
Belt Size (mm)	75 x 457
Variable Speed Settings	5
Dust Bag	Yes
Weight without Battery (kg)	3.4



ACCESSORIES FOR M18 FPS55 TRACK SAW

MODEL #	DESCRIPTION	IMAGE
GR800	800MM GUIDE RAIL	
GR1400	1400MM GUIDE RAIL	
GR2700	2700MM GUIDE RAIL	
PSA-1	RAIL CLAMPS	

MODEL #	DESCRIPTION	IMAGE
PSA-2	GUIDERAIL CONNECTOR	
PSA-3	SPLINTER STRIP	
PSA-4	GUIDERAIL BAG	
PSA-5	LOW FRICTION STRIP	

M18 FUEL 190MM CIRCULAR SAW

M18 CCS66

Voltage	18V
No Load Speed (rpm)	0-5000
Blade Diameter (mm)	190
Bore Size (mm)	30
Max. Cutting Depth 90° (mm)	66
Max. Cutting Depth 45° (mm)	48
Weight w/ 5.0Ah Battery Pack (kg)	4.2



M18 FUEL 190MM CIRCULAR SAW

M18 FCS66

Voltage	18V
No Load Speed (rpm)	0-5800
Blade Diameter (mm)	190
Bore Size (mm)	30
Max. Cutting Depth 90° (mm)	66
Max. Cutting Depth 45° (mm)	48
Max. Bevel Capacity (°)	50
Weight w/ 12.0Ah Battery Pack (kg)	5.4



M18 FUEL 190MM REAR HANDLE CIRCULAR SAW M18 FCSRH66

Voltage	18V
No Load Speed (rpm)	0-5800
Blade Diameter (mm)	190
Bore Size (mm)	30
Max. Cutting Depth 90° (mm)	66
Max. Cutting Depth 45° (mm)	48
Max. Bevel Capacity (°)	53
Weight w/ 12.0Ah Battery Pack (kg)	6.2



M18 FUEL JIGSAW

M18 FJS

Voltage	18V
No Load Stroke Rate (spm)	0-3500
Stroke Length (mm)	25
Bevel Cut Angel (°)	45
Max. Cutting Depth (mm)	
Wood	100
Steel	10
Weight w/ 5.0Ah Battery Pack (kg)	2.9



M18 FUEL BODY GRIP JIGSAW

M18 FBJS

Voltage	18V
No Load Stroke Rate(spm)	800-3500
Stroke Length (mm)	25
Bevel Cut Angle (°)	45
Max. Cutting Depth (mm)	
Wood	100
Aluminium	19
Steel	10
Weight w/5.0Ah Battery Pack (kg)	2.8



M18 FUEL MULTI TOOL

M18 FMT

Voltage	18V
No Load Speed (OPM)	10000-20000
Oscillation Angle Left/Right (°)	2.1/2.1
Tool Free Blade Change	Yes
LED Light	Yes
Weight w/5.0Ah Battery Pack (kg)	1.9



M18 FUEL 305MM MITRE SAW

M18 FMS305

Voltage	18V
No Load Speed (rpm)	0-3600
Blade Diameter (mm)	305
Bore Size (mm)	25.4
Mitre Capacity Left/Right (°)	50/60
Bevel Capacity Left/Right (°)	48/48
Weight w/ 12.0Ah Battery Pack (kg)	23



M18 FUEL 190MM MITRE SAW

M18 FMS190

Voltage	18V
No Load Speed (rpm)	0-5000
Blade Diameter (mm)	190
Bore Size (mm)	19
Mitre Capacity Left/Right (°)	48/48
Bevel Capacity Left/Right (°)	48/48
Weight w/ 5.0Ah Battery Pack (kg)	12.7



M18 FUEL 254MM MITRE SAW

M18 FMS254

Voltage	18V
No Load Speed (rpm)	0-4000
Blade Diameter (mm)	254
Bore Size (mm)	25.4
Mitre Capacity Left/Right (°)	50/60
Bevel Capacity Left/Right (°)	48/48
Weight w/ 5.0Ah Battery Pack (kg)	20



ACCESSORIES

Mitre Saw Stand

MSL 2000	Designed for M18 FMS190, M18 FMS254, M18 FMS305
----------	---



M18 FUEL 210MM TABLE SAW

M18 FTS210

ACCESSORIES

Voltage	18V
Saw Blade Diameter (mm)	210
Bore Size (mm)	25.4
Max. Cutting Depth (mm) 0°/45°	63.5 / 44
Max. Bevel Angle (°)	47
Distance Between Rip Fence and Saw Blade	
Left (mm)	310
Right (mm)	525 / 622
Weight w/12.0Ah Battery Pack (kg)	22.3



Table Saw Stand

TSS 1000 Designed for M18 FTS210



M18 FUEL 18GA FINISH NAILER

M18 FN18GS

M18 FUEL 16GA STRAIGHT FINISH NAILER

M18 FN16GS

Voltage	18V
Collation angle (°)	0
Fastener Type	F Type
Fastener Diameter (18Ga)	1.02mm
Fastener Length (mm)	15-54
Magazine Capacity	110 Nails
Mode	Sequential / Bump
Weight w/ 2.0Ah Battery Pack (kg)	2.9



Voltage	18V
Collation Angle	0°
Fastener Type	T Type
Fastener Diameter (mm)	1.6
Fastener Length (mm)	25-64
Magazine Capacity	43
Weight without Battery (kg)	2.9



M18 FUEL 21 DEGREE FRAMING NAILER

M18 FFN21

ACCESSORIES

Voltage	18V
Collation angle (°)	21
Fastener type	Full Round Head Nail
Fastener Diameter (mm)	2.9 - 3.8
Fastener Length min/max (mm)	50/90
Magazine Capacity (nails)	43
Mode	Sequential / Bump
LED Light	Yes
Weight w/ 5.0Ah Battery Pack (kg)	5.3



Extended Capacity Magazine

48-08-2744 Designed for M18 FFN21



M18 FUEL 7.6L COMPACT AIR COMPRESSOR

M18 FAC

M18 FUEL TRIM ROUTER

M18 FTR

Voltage	18V
Air Tank Capacity (L)	7.6
Max. Air Pressure	9.31 bar / 135 psi
Approx. Cut in Pressure	7.2 bar / 105 psi
Approx. Cut out Pressure	9.3 bar / 135 psi
Free Air Delivery	48 L/mins at 2.8 bar
Quick Connect type	1/4" Nitto
Sound Level (dBA)	68
Pump Type	Oil Free
Regulator	Single Turn
Weight w/ 5.0Ah Battery Pack (kg)	14.7



Voltage	18V
No Load Speed (rpm)	10000-31000
Max. Bit Diameter (mm)	38
Collet Diameter (mm)	6 or 1/4" (6.35)
Bit Brake	Yes
LED	Yes
Dust Shroud	Yes
Weight w/ 5.0Ah Battery Pack (kg)	2.1



M18 FUEL 1/2" MID-SIZE ROUTER

M18 FR12 ACCESSORIES

Voltage	18V
No Load Speed (RPM)	12000
Max. Bit Diameter (mm)	63
Collet Diameter (mm)	6, 6.35, 8, 12, 12.7
Plunge Capacity (mm)	60
Speed Settings	Yes
Dust Shroud	Yes
Weight without Battery (kg)	2.8



RBA-1 EMEA
001998885



RBA-2 EMEA
001998888



M18 FUEL HACKZALL

M18 FHZ

Voltage	18V
No Load Stroke Rate (spm)	0-3000
Stroke Length (mm)	22
Weight w/ 5.0Ah Battery Pack (kg)	2.6



M18 FUEL SAWZALL

M18 FSZ

Voltage	18V
No Load Stroke Rate (rpm)	0-3000
Stroke Length (mm)	32
Adjustable Shoe	Yes
LED Light	Yes
Hang Hook	Yes
Weight w/ 5.0Ah Battery Pack (kg)	3.8



M18 FUEL SUPER SAWZALL

M18 FSX

Voltage	18V
No Load Stroke Rate (spm)	0-3000
Stroke Length (mm)	32
On/Off Orbital	Yes
5-Speed Dial	Yes
Adjustable Shoe	Yes
Hang Hook	Yes
Weight w/ 12.0Ah Battery Pack (kg)	5.5



M18 TOP HANDLE JIGSAW

M18 BJS

Voltage	18V
No Load Stroke Rate (spm)	0-2800
Stroke Length (mm)	25
Bevel Cut Angel (°)	45
Max. Cutting Depth (mm)	
Wood	55
Steel	10
Weight w/ 5.0Ah Battery Pack (kg)	2.5



M18 COMPACT ONE-HANDED HACKZALL

C18 HZ

Voltage	18V
No Load Stroke Rate (spm)	0-3000
Stroke Length (mm)	20
Weight w/ 4.0Ah Battery Pack (kg)	2.5



M18 CUT OUT TOOL

M18 BCT

Voltage	18V
No Load Speed (rpm)	0-28000
Spiral Cutting bits	1/8" (3.1 mm) and 1/4" (6.3 mm) shanks
Adjustable Shoe	Yes
LED Light	Yes
Weight w/ 5.0Ah Battery Pack (kg)	1.5



M18 MULTI TOOL

M18 BMT

Voltage	18V
No Load Speed (OPM)	12000-18000
Oscillation Angle Left/Right (°)	1.5/1.5
Tool Free Blade Change	Yes
LED Light	Yes
Weight w/5.0Ah Battery Pack (kg)	1.9



M18 PLANER

M18 BP

Voltage	18V
No Load Speed (rpm)	0-14000
Planing Width (mm)	82
Adjustable Depth (mm)	0-2
Rabbit Depth (mm)	10.7
Weight w/ 4.0Ah Battery Pack (kg)	3.5



ACCESSORIES

Compact Router Plunge Base

48105601 Designed for M18 FTR



Compact Router Offset Base

48105602 Designed for M18 FTR



M18 125MM RANDOM ORBITAL SANDER

M18 BOS125

Voltage	18V
Oscillation Diameter (mm)	2.4
Oscillation Rate (opm)	14000-24000
Sanding Pad Size (mm)	125
Weight w/ 5.0Ah Battery Pack (kg)	1.6



M18 1/4 SHEET SANDER

M18 BQSS

Voltage	18V
No Load Speed (OPM)	11000 - 13000
Orbit Travel Diameter (mm)	1.6
Grinding Plate Size (mm)	113 x 104
Weight w/ 5.0Ah Battery Pack (kg)	2



M12

M12 FUEL 140MM CIRC SAW

M12 FCS442

Voltage	12V
No Load Speed (rpm)	3850
Blade Diameter	140
Bore Size	20
Max. Cutting Depth @90°	46
Max. Cutting Depth @45°	32
Weight without battery (kg)	2.03

ACCESSORIES

Framing Circular Saw Blade


4932471310A



M12 FUEL COMPACT CIRCULAR SAW

M12 CCS44

Voltage	12V
No Load Speed (rpm)	0-3600
Blade Diameter (mm)	140
Bore Size (mm)	20
Max. Cutting Depth 90° (mm)	44
Max. Cutting Depth 45° (mm)	33
Weight w/ 4.0Ah Battery Pack (kg)	2.7

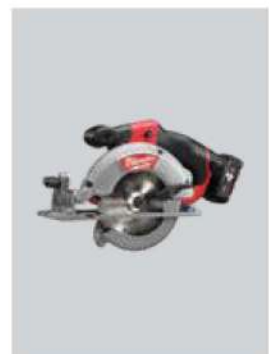

M12 FUEL
COMPACT 18GA FINISH NAILER

M12 FCN18GS

Voltage	12V
Collation Angle (°)	0
Fastener Type	F Type
Fastener Diameter (mm)	1.2
Fastener Length (mm)	15-38
Magazine Capacity	110
Weight without Battery (kg)	1.91



M12 FUEL
JIGSAW

M12 FJS

Voltage	12V
No Load Stroke Rate (SPM)	3000
Stroke Length (mm)	22
Bevel Capacity Left/Right (°)	45
Max. Cutting Depth Wood (mm)	70
Max. Cutting Depth Aluminium (mm)	15
Weight without battery (kg)	1.54



M12 FUEL
COMPACT HACKZALL

M12 CHZ

Voltage	12V
No Load Stroke Rate (spm)	0-3000
Stroke Length (mm)	15.9
Weight w/ 4.0Ah Battery Pack (kg)	1.6



M12 FUEL
CUT OFF TOOL

M12 FCOT

Voltage	12V
No Load Speed (rpm)	0-20000
Max. Disc Diameter (mm)	76
Max. Cutting Depth (mm)	16.3
Arbor Size (mm)	10
Weight w/ 6.0Ah Battery Pack (kg)	1.3



M12 FUEL
DELTA SPOT SANDER

M12 FDSS

Voltage	12V
No Load Speed (rpm)	8,000 - 14,000
Sanding Pad Dimensions (mm)	88.8 x 63.5
Variable Speed Settings	4
Orbit Travel Diameter (mm)	1.5
Sandpaper Type	POWERGRID Hook and Loop
Weight without Battery (kg)	0.6



M12 FUEL
MULTI TOOL

M12 FMT

Voltage	12V
No Load Speed (OPM)	10000-20000
Oscillation Angle Left/Right (°)	1.95/1.95
Tool Free Blade Change	Yes
LED Light	Yes
Weight w/6.0 Battery Pack (kg)	1.5



ACCESSORIES FOR M12 FDSS

POWERGRID MESH SANDING ACCESSORIES



KEY FEATURES

POWERGRID Reinforced Mesh Construction Delivers Maximum Durability

Up to **12X LIFE** VS. Standard Sandpaper
Open Weave Design is Reusable and Easily Cleaned

Shake, Vacuum, Blow or Rinse Away Debris to Extend the Life

Model #	Description
48-80-5080	POWERGRID MESH SANDING SHEET GRIT 80 (12PK + 1Pad Saver)
48-80-5120	POWERGRID MESH SANDING SHEET GRIT 120 (12PK + 1Pad Saver)
48-80-5150	POWERGRID MESH SANDING SHEET GRIT 150 (12PK + 1Pad Saver)
48-80-5180	POWERGRID MESH SANDING SHEET GRIT 180 (12PK + 1Pad Saver)
48-80-5220	POWERGRID MESH SANDING SHEET GRIT 220 (12PK + 1Pad Saver)
48-80-5320	POWERGRID MESH SANDING SHEET GRIT 320 (12PK + 1Pad Saver)
48-80-5400	POWERGRID MESH SANDING SHEET GRIT 400 (12PK + 1Pad Saver)
48-80-5402	SPONGE INTERFACE PAD
48-80-5405	POWERGRID MESH SANDING ASSORTED KIT (GRIT 80 x 4PK, GRIT 120 x 4PK, GRIT 180 x 4PK, 1Pad Saver)

M12 23GA PIN NAILER

M12 PN23GS

Voltage	12V
Collation Angle (°)	0
Fastener Type	Headless Pin Nail
Fastener Diameter (mm)	0.58
Fastener Length (mm)	13-35
Magazine Capacity	118-136
Weight without Battery (kg)	1.72



M12 BRUSHLESS PLANER

M12 BLP

Voltage	12V
No Load Speed (rpm)	14,500
Blade Width (mm)	56
Planing Depth (mm)	0-2
Weight without Battery (kg)	1.6



ACCESSORIES

56mm Planer Blade

48-38-2005

Designed for M12 BLP



M12 BRUSHLESS ROTARY TOOL

M12 BLROT

Voltage	12V
Collet Capacity (mm)	0.8, 1.6, 2.4, 3.2
No Load Speed (rpm)	5000-27500
Weight Without Battery (kg)	0.36



M12 COMPACT MULTI TOOL

C12 MT

Voltage	12V
No Load Speed (rpm)	5000-20000
Oscillation Angle Left/ Right (°)	1.5/1.5
Weight w/ 2.0Ah Battery Pack (kg)	1.2



M12 COMPACT HACKZALL

C12 HZ

Voltage	12V
No Load Stroke Rate (spm)	0-3000
Stroke Length (mm)	13
Weight w/ 2.0Ah Battery Pack (kg)	1.2



M12 COMPACT ROTARY TOOL

C12 RT

Voltage	12V
No Load Speed (rpm)	5000-32000
Collet Capacity (mm)	0.8, 1.6, 2.4, 3.2
Weight w/ 2.0Ah Battery Pack (kg)	0.8



CARPENTRY DUST MANAGEMENT SOLUTION GUIDE

		Dust Canister Included	Dust Bag Included	M18 FBPV	M12 FVCL	M18 VC-2	M18 FPOVCL	M18 FVC23L	DUST EXT
									DEK26 32mm Vacuum Hose
				3.8L 1,557L/min Dry Clean-up Solution	6.1L 1,275L/min Wet/Dry Clean-up Solution	7.5L 1,246L/min Wet/Dry Clean-up Solution	9.5L 1,416L/min Wet/Dry Clean-up Solution	23L 2,463L/min Wet/Dry Clean-up Solution	
Cut Out tool	M18 BCT								
Recip Saws	M12 CHZ								
	M18 FHZ								
	M18 FSZ								
	M18 FSX								
	M18 FSX								
Multi Tools (Sanding)	M12 FMT (Sanding)								DEK26
	M18 FMT (Sanding)								DEK26
Sanders	M12 FDSS								
	M18 BQSS								DEK26
	M18 BOS125								DEK26
	M18 FBTS75								DEK26
Planers	M12 BLP								DEK26
	M18 BP								
Jigsaws	M12 JS								
	M12 FJS								DEK26
	M18 FJS								DEK26
	M18 FBJS								DEK26
Cut Off Tool	M12 FCOT								DEK26
Routers	M18 FTR								DEK26
	M18 FR12								DEK26
Circular Saws	M12 CCS44								DEK26
	M18 CCS55								DEK26
	M18 FCS66								DEK26
	M18 FPS55								DEK26
Benchtop	M18 FMS190								DEK26
	M18 FMS254								DEK26
	M18 FMS305								DEK26
	M18 FTS210								DEK26

Occasional Use Optimal Use

