




**BATTERY CHARGER PORTABLE POWER
DRILLING
FASTENING
TRANSPORTATION
CARPENTRY
CONCRETE
METALWORKING
OUTDOOR POWER EQUIPMENT
JOBSITE CLEANUP
PLUMBING & MECHANICAL
ELECTRICAL & POWER UTILITY
LASER
LIGHTING
SYSTEM ENHANCEMENT
JOBSITE APPAREL
HANDTOOLS
PACKOUT & STORAGE
PERSONAL PROTECTIVE EQUIPMENT
ACCESSORIES**

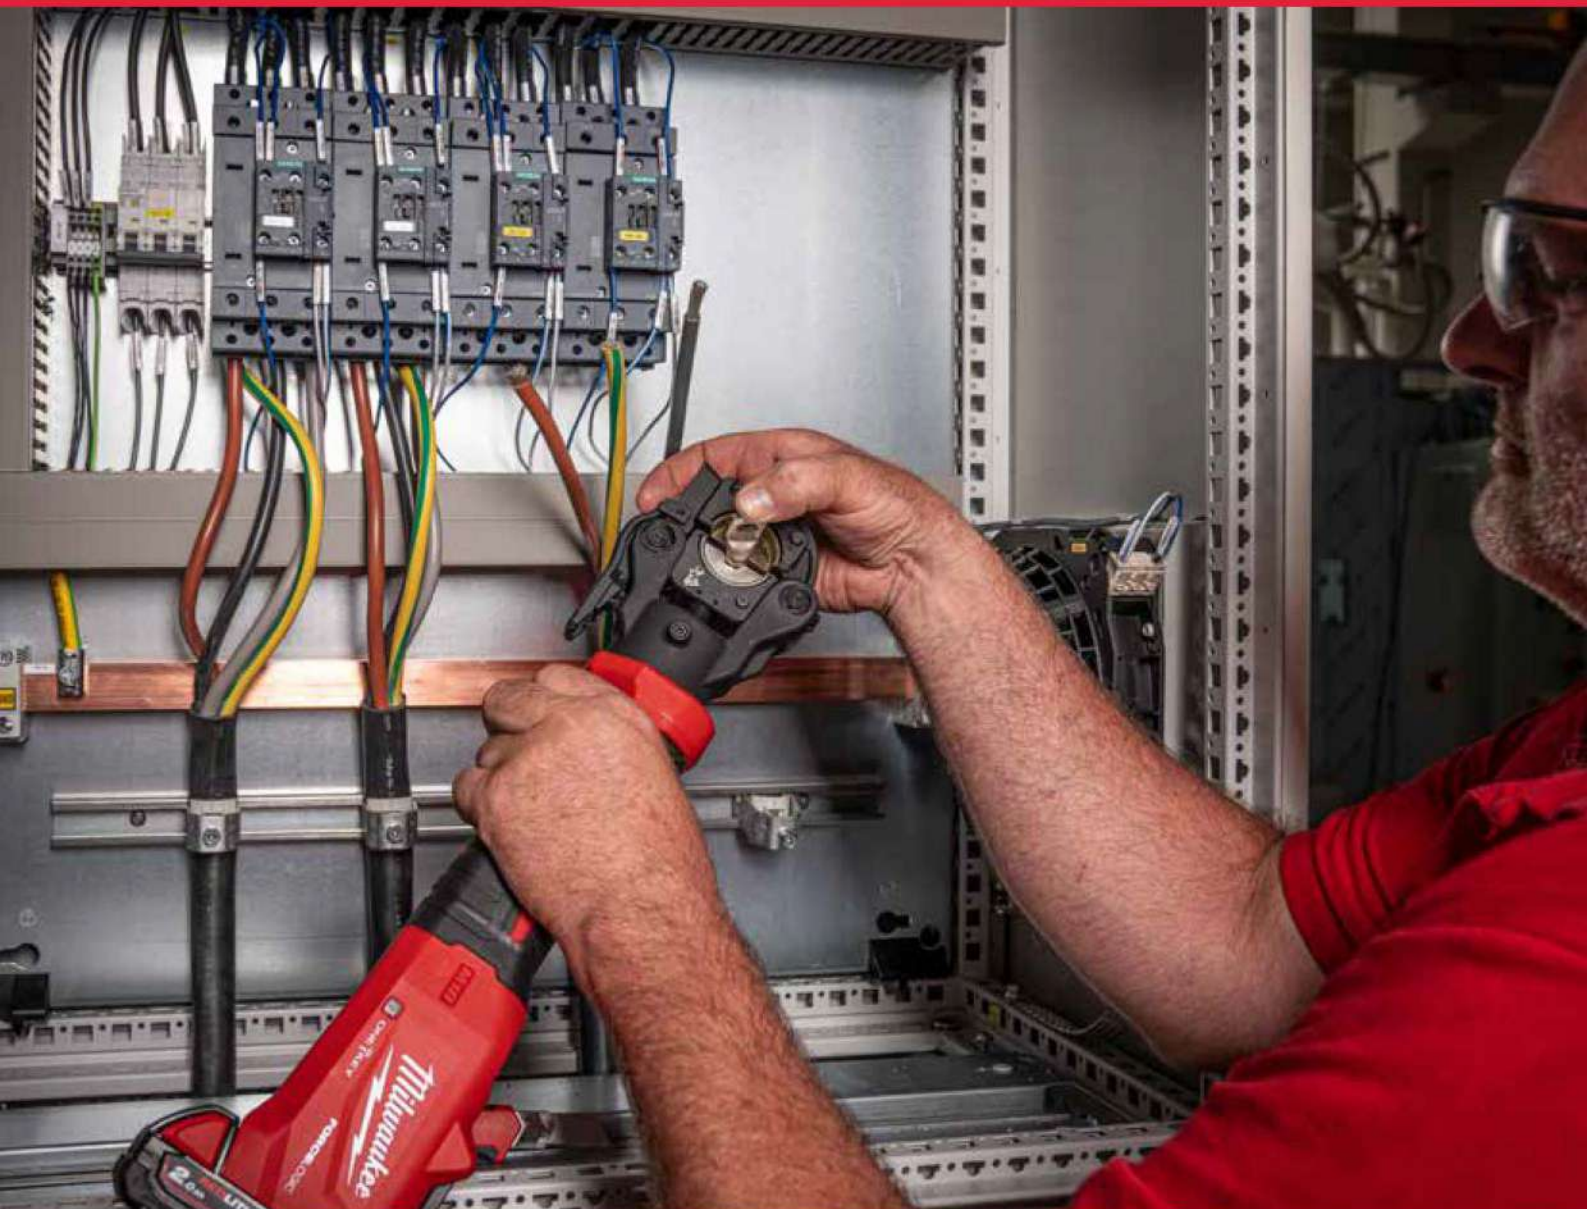

ALLIANCE SUPPLIES SDN.BHD.

www.alliance-supplies.com | www.alliancesuppliesonline.com.my | info@alliance-supplies.com | T:+606 3338889/8887/8898

M18

M18 FORCELOGIC STRUT SHEAR

Battery System	M18
Strut material	Mild steel, Galvanized steel
Max material thickness (mm)	3
Force (kN)	176.4
Cutting Cycle	5 seconds
Dual LEDs	YES
Tri-Stand Chain Vice Mount	YES
Die Retention Arm	YES
Tool dimension (mm)	444.5 x 193.8 x 243.6
Weight (Tool only) (kg)	10.7

M18 M18 FORCE LOGIC 60KN GUILLOTINE CRIMPER

M18 ONEHCCT60

Voltage	18V
Nominal Force (kN)	60
Battery Platform	18V
Max. Compression Range (mm ²)	300
Jaw Style	Guillotine



M18 FORCE LOGIC 125MM UNDERGROUND CABLE CUTTER

M18 HCC125R

Voltage	18V
Cutting Range(CU/AL/SWA) (mm)	125
Head Rotation(°)	180
Output Force (tons)	13
Weight w/ 8.0Ah Battery Pack(kg)	15.9



M18 FORCE LOGIC 15T CRIMPER

M18 HCCT15

Material Composition	Reinforced Nylon
Length (inch)	4.53
Weight (lb)	16.85
Height (inch)	6.69
Width (inch)	26.5
Force (tons)	15
Capacity Cu	#8AWG - 1500 MCM Cu
Capacity Al	#8AWG - 1250 MCM Al



M18 STSO

ACCESSORIES



49-16-0158	Strut Shearing Dies 41mm X 41mm
49-16-1316	Strut Shearing Dies 21mm X 41mm
49-16-0078	Strut Shearing Dies 22mm X 41mm
49-16-1513	Strut Shearing Dies 21mm X 41mm Combo
49-16-1578	Strut Shearing Dies 22mm X 41mm Combo



ACCESSORIES

15T P-Dies (750MCM)

4915P750C	Conductor Type - Copper
4915P750	Conductor Type - Aluminum

15T P-Dies (800MCM)

4915P800C	Conductor Type - Copper
4915P800	Conductor Type - Aluminum

15T P-Dies (1000MCM)

4915P000C	Conductor Type - Copper
4915P000	Conductor Type - Aluminum

15T P to U-Die Adapter

49-15-PUAD	15T P to U-Die Adapter
------------	------------------------



M18 FORCE LOGIC 6 TON CU/AL CABLE CUTTER

Voltage	18V
Cutting Range (CU/AL Cutting Jaw) (mm)	35
Cutting Range (ACSR Cutting Jaw 49-16-2773) (mm)	22.5
Cutting Range (Fine Stranded Cutting Jaw 49-16-2778) (mm)	35
Cut Speed (s)	3
No. of Cuts/Blade	3,000+
No. of Cuts/Battery Charge	150+
Head Rotation (°)	350
Auto Retraction	Yes
Weight w/ 5.0Ah Battery Pack (kg)	3.7

M18 FORCE LOGIC OVERHEAD CABLE CUTTER

Voltage	18V
Cutting Range (1590 Falcon ACSR) (mm)	45
Cutting Range (EHS Guy Wire) (mm)	12.7
Cut Speed (s)	7.7
No. of Cuts per 5.0Ah Battery Pack	100+
Head Rotation (°)	340
Output Force (tons)	9
Weight w/ 5.0Ah Battery Pack (kg)	6

M18 FORCE LOGIC UNDERGROUND CABLE CUTTER

Voltage	18V
Cutting Range (CU/AL Cutting Jaw) (mm)	75
Cut Speed (s)	9.5
No. of Cuts Per 5.0Ah Battery Pack	100+
Head Rotation (°)	340
Output Force (tons)	9
Weight w/ 5.0Ah Battery Pack (kg)	7.9

M18 FORCE LOGIC 6T COMMERCIAL CRIMPER

Voltage	18V
Output Force (tons)	6
Range (mm ²)	Copper: 300 Aluminum: 150
Crimp Speed (s)	3
PFM Adaptive Pressure Control System	Yes
No. of Crimps per 2.0Ah Battery Pack	220+
Head Rotation (°)	350
Weight w/ 2.0Ah Battery Pack (kg)	3.7

M18 HCC ACCESSORIES



Replacement Jaw & Blades

49-16-2778	Fine Stranded Wire Jaw
4932-4644-98	CU/AL Replacement Blades
49-16-0412	477 MCM ACSR Replacement Blades
49-44-2778	Fine Stranded Wire Replacement Blades



M18 HCC45



OVERHEAD CUTTER ACCESSORIES

49162775	Replacement Overhead Cutter
----------	-----------------------------



M18 HCC75R



UNDERGROUND CUTTER ACCESSORIES

49162774	Replacement Underground Cutter Blade
----------	--------------------------------------



M18 HCCT ACCESSORIES



019600625	Replacement CU/AL Standard Copper and Aluminium Cable Cutting Jaw
-----------	---



M18 FORCE LOGIC 6 TON KNOCKOUT TOOLS

Voltage	18V
Hole Diameter (mm)	Max. 100
Thickness (mm)	Mild Steel: 3.0 Stainless Steel: 2.5
No. of Holes per 2.0Ah Battery Pack	120
Output Force (tons)	6
Capacity (Basic Set) (mm)	12 - 50
Capacity (Additional Accessories) (mm)	63 - 100
Weight w/ 2.0Ah Battery Pack (kg)	2.0
Included:	• (49-16-2680) 7/16" (11 mm) Draw Stud • (49-16-2681) 3/4" (19 mm) Draw Stud • Quick Connect Alignment System • EXACT 1/2" (12 mm) to 2" (50 mm) Conduit Punches and Dies • (2) M18 REDLITHIUM 2.0 Batteries • M18 and M12 Multi-voltage Charger • Carrying Case

M18 HKP



M18 BRUSHLESS THREADED ROD CUTTER

Voltage	18V
Cutting Capacity Mild Steel	1/4", 3/8", 1/2"
Cutting Capacity Stainless Steel	1/4", 3/8"
Style	Shear
LED	Yes
Blades	Replacable Cutting Dies
Length	1-1/2"
Weight w/ 2.0Ah Battery Pack (kg)	3.2

M18 BLTRC



ACCESSORIES

48-44-2872 1/4", 3/8", 1/2" Replacement Cutting Die Set



M18 FUEL POWERED FISH TAPE

Voltage	18V
No Load Speed (rpm)	0-37
Non-Conductive Drum Tape Length (m)	30
Non-Conductive Drum Tape Material	Polyester
Weight w/ 2.0Ah Battery Pack (kg)	6.4

M18 FPFT



ACCESSORIES

FPFT18ACCY01 Non-Conductive Fish Tape 30m



M18 FORCE LOGIC 700 BAR HYDRAULIC PUMP

Voltage	18V
Force Output (bar)	700 (10,000 psi)
Oil Delivery Low Pressure (l/min)	2.0
Oil Delivery High Pressure (l/min)	0.4
Oil Capacity (L)	1.3
Remote Controller	Wired & Wireless
Adaptive Pressure Control	PFM
Weight w/ 12.0Ah Battery Pack (kg)	16.5

M18 HUP700



ACCESSORIES

129227516 1 Liter Can Of Hydraulic Oil



M18 BRUSHLESS SINGLE ACTION MINI HYDRAULIC PUMP

Force Output (bar)	700(10,000 psi)
Oil Delivery Low Pressure(l/min)	0.3
Oil Delivery High Pressure(l/min)	0.2
Oil Capacity (L)	1.0
Weight w/12.0Ah Battery Pack(kg)	6.6



M18 HMP700

ACCESSORIES

129227516 1 Liter Can Of Hydraulic Oil



M12

M12 COMPACT CABLE CUTTER

Voltage	12V
Cutting Range (mm)	32
Cutting Force (kN)	32
Speed Settings	2
Weight w/ 4.0Ah Battery Pack (kg)	3.0



M12 CC

ACCESSORIES

129226504 M12 600 MCM Cable Cutter Blade



M12 SOLDERING IRON

Voltage	12V
Heat Up Time (s)	20 - 30
Interchangeable Tips	Chisel & Pointed
LED	Yes
Run-Time (min)	60
Length (mm)	294
Weight w/ 2.0Ah Battery Pack (kg)	0.5



M12 SI



10-1000V DUAL RANGE VOLTAGE DETECTOR

Battery	AAA battery
Length (mm)	150.4
LED Work Light	Yes
Range	10-49V 50-1000V
Weight (g)	68.04



2203-20

TRUE RMS MULTIMETER

Battery	Alkaline (AA)
Display Type	White on Black LCD
Switch Type	Dial
TRMS	Yes
Current AC DC	10.00A
Voltage AC DC	600V
Frequency	10 Hz - 50 kHz
Resistance	40MΩ
Continuity	Audible
Capacitance	1,000μF
Contact Temperature (°C)	-40 to 400
Backlight	Yes
Bargraph	Yes



2217-20