



Socket & Ratchet

Socket Set	34-36
1/4" Socket and Accessories	36-38
3/8" Socket and Accessories	38-40
1/2" Socket and Accessories	40-43
3/4" Socket and Accessories	43
Pass-Thru Socket and Accessories	44
1/4" Dr. Bit Socket	44
3/8" Dr. Bit Socket	45
1/2" Dr. Bit Socket	45-46



09521 21Pc. 1/4" Dr. Socket Set

- 11Pc. 1/4" Dr. 6Pt. Socket (4,5,6,8,9,10,11,12,13,14mm)
- 1Pc. 1/4" Dr. Quick Release Ratchet 5"
- 1Pc. 1/4" Dr. Extension Bar 2"
- 1Pc. 1/4" Dr. Spinner Handle
- 1Pc. Bit Adaptor 1/4"Fx1/4"Hexagon
- 3Pc. 1/4" Hex Shank Bits, 25mm Length, Slotted (4,5,6mm)
- 3Pc. 1/4" Hex Shank Bits, 25mm Length, Phillips (#1,#2,#3)

No.			
09521	6	12	17.3

▲ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



09525 15Pc. 1/2" Dr. Socket Set

- 13Pc. 1/2" Dr. 6Pt. Socket (10,12,13,14,15,16,17,18,19,20,21,22,24mm)
- 1Pc. 1/2" Dr. Quick Release Ratchet 10"
- 1Pc. 1/2" Dr. Extension Bar 5"

No.			
09525	2	4	14.8

▲ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



09001 36Pc. 1/4" Dr. Socket Set

- 14Pc. 1/4" Dr. 6Pt. Socket (3,5,4,4,5,5,5,5,6,7,8,9,10,11,12,13,14)
- 5Pc. 1/4" Dr. 6Pt. Deep Socket (8,10,11,12,13mm)
- 1Pc. 1/4" Dr. Quick Release Ratchet 5"
- 2Pc. 1/4" Dr. Extension Bar (2",4")
- 1Pc. 1/4" Dr. Sliding T-Handle 4"
- 1Pc. 1/4" Dr. Universal Joint
- 1Pc. 1/4" Dr. Flexible Extension Bar 6"
- 1Pc. 1/4" Dr. Spinner Handle
- 1Pc. 1/4" Dr. Bit Adaptor 1/4"Fx1/4"Hexagon
- 3Pc. 1/4" Hex Shank Bits, 25mm Length, Slotted (4,5,6mm)
- 2Pc. 1/4" Hex Shank Bits, 25mm Length, Phillips (#1,#3)
- 4Pc. 1/4" Hex Shank Bits, 25mm Length, Hexagon (3,4,5,6mm)

No.			
09001	-	12	17.8

▲ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



09523 14Pc. 3/8" Dr. Socket Set

- 12Pc. 3/8" Dr. 6Pt. Socket (8,9,10,11,12,13,14,15,16,17,18,19mm)
- 1Pc. 3/8" Dr. Quick Release Ratchet 8"
- 1Pc. 3/8" Dr. Extension Bar 3"

No.			
09523	4	12	16.4

▲ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



09137 13Pc. 1/4" & 3/8" Series Boltbiter Set

- 2Pc. 1/4" Series Boltbiter Socket (7/8,8mm)
- 8Pc. 3/8" Series Boltbiter Socket (10B,11B,12B,13B,14B,16B,17B,19Bmm)
- 1Pc. 3/8" DR. Quick Release Ratchet W/Grip 8"
- 1Pc. 3/8" Socket Adaptor, 3/8"Fx1/4" M
- 1Pc. 3/8" DR. Extension Bar 6"
- Bi-directional design for removing or tightening damaged fasteners
- Tapered entry enables socket to easily seat on a damaged fastener
- Square drive with hex base for use with impact gun, ratchet, wrench or pliers
- Chrome molybdenum (Cr-Mo) alloy steel for exceptional strength and long lasting durability

No.			
09137	1	4	6.2

▲ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



09002 52Pc. 1/4" Dr. Socket Set

- 14Pc. 1/4" Dr. 6Pt. Socket (3,5,4,4,5,5,5,5,6,7,8,9,10,11,12,13,14mm)
- 4Pc. 1/4" Dr. 6Pt. Deep Socket (8,10,12,13mm)
- 3Pc. 1/4" Dr. Bit Socket, Slotted (4,5,5,6,5mm)
- 4Pc. 1/4" Dr. Bit Socket, Phillips (#1,#2)x2pc
- 5Pc. 1/4" Dr. Bit Socket, Hexagon (3,4,5,6,8mm)
- 6Pc. 1/4" Dr. Bit Socket, Torx® (T10,T15,T20,T25,T30,T40)
- 1Pc. 1/4" Dr. Quick Release Ratchet 5"
- 2Pc. 1/4" Dr. Extension Bar (2",4")
- 1Pc. 1/4" Dr. Sliding T-Handle 4"
- 1Pc. 1/4" Dr. Universal Joint
- 1Pc. 1/4" Dr. Spinner Handle
- 1Pc. 1/4" Dr. Bit Adaptor 1/4"Fx1/4"Hexagon
- 3Pc. 1/4" Hex Shank Bits, 25mm Length, Slotted (4,5,6mm)
- 2Pc. 1/4" Hex Shank Bits, 25mm Length, Phillips (#1,#3)
- 4Pc. 1/4" Hex Shank Bits, 25mm Length, Hexagon (3,4,5,6mm)

No.			
09002	-	12	18.2

▲ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



09524 22Pc. 3/8" Dr. Socket Set

- 14Pc. 3/8" Dr. 6Pt. Socket (6,7,8,9,10,11,12,13,14,15,16,17,18,19mm)
- 5Pc. 3/8" Dr. 6Pt. Deep Socket (12,13,14,17,19mm)
- 1Pc. 3/8" Dr. Spark Plug Socket 16mm
- 1Pc. 3/8" Dr. Quick Release Ratchet 8"
- 1Pc. 3/8" Dr. Extension Bar 6"

No.			
09524	-	10	18.5

▲ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



09138 23Pc. 1/4" & 3/8" Series Boltbiter Set

- 4Pc. 1/4" Series Boltbiter Socket (7/8,8A,8Bmm)
- 16Pc. 3/8" Series Boltbiter Socket (10A,10B,11A,11B,12A,12B,13A,13B,14A,14B,16A,16B,17A,17B,19A,19Bmm)
- 1Pc. 3/8" DR. Quick Release Ratchet W/Grip 8"
- 1Pc. 3/8" Socket Adaptor, 3/8"Fx1/4" M
- 1Pc. 3/8" DR. Extension Bar 6"
- Bi-directional design for removing or tightening damaged fasteners
- Tapered entry enables socket to easily seat on a damaged fastener
- Square drive with hex base for use with impact gun, ratchet, wrench or pliers
- Chrome molybdenum (Cr-Mo) alloy steel for exceptional strength and long lasting durability

No.			
09138	1	4	20.9

▲ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



09004 60Pc. 3/8" Dr. Socket Set

- 18Pc. 3/8" Dr. 6Pt. Socket (6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,24mm)
- 11Pc. 3/8" Dr. 6Pt. Deep Socket (8,10,11,12,13,14,15,16,17,18,19mm)
- 2Pc. 3/8" Dr. Spark Plug Socket (16,21mm)
- 3Pc. 3/8" Dr. Bit Socket, Slotted (5,5,6,5,8mm)
- 5Pc. 3/8" Dr. Bit Socket, Phillips (#1x2pc, #2x2pc, #3x1pc)
- 7Pc. 3/8" Dr. Bit Socket, Hexagon (3,4,5,6,7,8,10mm)
- 9Pc. 3/8" Dr. Bit Socket, Torx® (T10,T15,T20,T25,T30,T40,T45,T50,T55)
- 1Pc. 3/8" Dr. Quick Release Ratchet 8"
- 2Pc. 3/8" Dr. Extension Bar (3",10")
- 1Pc. 3/8" Dr. Universal Joint
- 1Pc. 1/2" Dr. 3-Way Socket Adaptor
- 1Pc. 1/4" Dr. Bit Adaptor 1/4"Fx1/4"Hexagon
- 3Pc. 1/4" Hex Shank Bits, 25mm Length, Slotted (4,5,6mm)
- 2Pc. 1/4" Hex Shank Bits, 25mm Length, Phillips (#1,#3)
- 4Pc. 1/4" Hex Shank Bits, 25mm Length, Hexagon (3,4,5,6mm)

No.			
09004	-	3	14.9

▲ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



09005 23Pc. 1/2" Dr. Socket Set

- 16Pc. 1/2" Dr. 6Pt. Socket (10,11,12,13,14,15,16,17,18,19,20,21,22,23,24,27,30,32,34mm)
- 3Pc. 1/2" Dr. 6Pt. Deep Socket (13,17,19mm)
- 1Pc. 1/2" Dr. Quick Release Ratchet 10"
- 1Pc. 1/2" Dr. Extension Bar 10"
- 1Pc. 1/2" Dr. Universal Joint
- 1Pc. 3/8" Dr. 3-Way Socket Adaptor

No.			
09005	-	4	24.3

▲ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



24Pc. 1/2" Dr. Metric Socket Set

- 1Pc. Quick-Release Ratchet
- 19Pc. Metric Sockets* (9,10,11,12,13,14,15,16,17,18,19,20,21,22,23,24,27,30,32mm)
- 4Pc. Accessories
- Wobble Extension Bars (5",10")
- Universal Joint
- T-Handle
- * 09060: 12pt. Sockets
- 09060-6: 6pt. Sockets

No.			
09060	0	4	18.8
09060-6	0	4	18.8

▲ Warranty terms of tool set comply with the individual product.



09099 33Pc. 1/2" Dr. Socket Set

- 1Pc. 4-in-1 QuadBox Ratcheting Wrench 8x10x12x13mm
- 1Pc. 4-in-1 QuadBox Ratcheting Wrench 16x17x18x19mm
- 21Pc. 1/2" Dr. 6Pt. Socket (8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23,24,27,30,32,34mm)
- 5Pc. 1/2" Dr. 12Pt. Socket (10,12,14,17,19mm)
- 1Pc. 1/2" Dr. Quick Release Ratchet 10"
- 2Pc. 1/2" Dr. Extension Bar (5",10")
- 1Pc. 1/2" Dr. Universal Joint
- 1Pc. 3/8" Dr. 3-Way Socket Adaptor

No.			
09099	-	2	11.4

▲ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



09006 46Pc. 1/2" Dr. Socket Set Metric & SAE

- 20Pc. 1/2" Dr. 6Pt. Socket (8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,24,27,30,32,34mm)
- 11Pc. 1/2" Dr. 6Pt. Socket (3/8",7/16",1/2",9/16",5/8",11/16",3/4",13/16",7/8",15/16",1")
- 7Pc. 1/2" Dr. 6Pt. Deep Socket (10,12,13,14,15,17,19mm)
- 2Pc. 1/2" Dr. Spark Plug Socket (16,21mm)
- 1Pc. 1/2" Dr. Quick Release Ratchet 10"
- 2Pc. 1/2" Dr. Extension Bar (5",10")
- 1Pc. 1/2" Dr. Flexible Handle 10"
- 1Pc. 1/2" Dr. Universal Joint
- 1Pc. 3/8" Dr. 3-Way Socket Adaptor

No.			
09006	-	3	214

▲ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



09061 25Pc. 1/2" Dr. 6Pt. Socket Set Metric

- 1Pc. Quick-Release Ratchet
- 19Pc. Metric Sockets (9,10,11,12,13,14,15,16,17,18,19,20,21,22,23,24,27,30,32mm)
- 5Pc. Accessories
- Wobble Extension Bars (5",10")
- Flex Handle 15"
- T-Handle
- Universal Joint

No.			
09061	0	4	22.5

▲ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



09007 60Pc. 1/2" Dr. Socket Set

- 17Pc. 1/2" Dr. 6Pt. Socket (10,11,12,13,14,15,16,17,18,19,20,21,22,24,27,30,32mm)
- 10Pc. 1/2" Dr. 6Pt. Deep Socket (10,11,12,13,14,15,16,17,18,19mm)
- 2Pc. 1/2" Dr. Spark Plug Socket (16,21mm)
- 3Pc. 1/4" Dr. Bit Socket, Slotted (4,5,5.6,5mm)
- 3Pc. 1/4" Dr. Bit Socket Phillips (#1,#2,#3)
- 1Pc. 1/2" Dr. Quick Release Ratchet 10"
- 2Pc. 1/2" Dr. Extension Bar (5",10")
- 1Pc. 1/2" Dr. Universal Joint
- 1Pc. 3/8" Dr. 3-Way Socket Adaptor
- 1Pc. 1/4" Dr. Spinner Handle
- 1Pc. 1/4" Dr. Bit Adaptor 1/4"Fx1/4"Hexagon
- 3Pc. 1/4" Hex Shank Bits, 25mm Length, Pozidriv (#1,#2,#3)
- 7Pc. 1/4" Hex Shank Bits, 25mm Length, Hexagon (2,3,4,5,6,7,8mm)
- 8Pc. 1/4" Hex Shank Bits, 25mm Length, Tamper-Proof Torx® (TT8,TT10,TT11,TT20,TT25,TT27,TT30,TT40)

No.			
09007	-	3	18.2

▲ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



09088 22Pc. 1/2" Dr. Socket Set, SAE

- 15Pc. 1/2" Dr. 12Pt. Socket (5/16",3/8",7/16",1/2",9/16",5/8",11/16",3/4",13/16",7/8",15/16",1",1-1/16",1-1/8",1-1/4")
- 1Pc. 1/2" Dr. Quick Release Ratchet 10"
- 1Pc. 1/2" Dr. Speeder Handle
- 1Pc. 1/2" Dr. Flexible Handle 10"
- 2Pc. 1/2" Dr. Extension Bar (5",10")
- 1Pc. 1/2" Dr. Sliding T-Handle
- 1Pc. 1/2" Dr. Universal Joint

No.			
09088	-	3	22.9




▲ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



Tool Knowledge Station

SATA Pass-Thru Socket

Pass-thru socket and connecting rod for reaching the depth of the workpiece, and replacing and breaking the working restriction of the long sleeve regardless screw and bolt length



- **Same capacity**
Torque of thin pass-thru socket same with that of common socket

- **Multiple functions**
Used together with special adapter for quick conversion to traditional 1/4", 3/8", 1/2" drive head speeder wrench for standard sockets and extension rods

- Pass-thru socket and connecting rod for reaching the depth of the workpiece (deeper than that of traditional socket)

- **Featuring easy operation**
Special gear ratchet drive mechanism for increase torqued with only 5 degrees of rotation angle, suitable for small work space

- **Powerful function**
Operation height reduced by nearly 50% and width reduced by nearly 20%





09015 15Pc. 3/4" Dr. 12Pt. Socket Set

- 10Pc. 3/4" 12pt. Socket (30,32,34,36,38,41,46,50,55,60mm)
- 1Pc. 3/4" Quick-Release Ratchet
- 2Pc. 3/4" Drive Wobble Extensions (4",8")
- 1Pc. 3/4" Drive T-Handle
- 1Pc. 3/4" Universal Joint

No.			
09015	-	1	14.9

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



09016 26Pc. 3/4"x1" Dr. Socket Set

- 1Pc. 3/4" 12pt. Socket 21 mm
- 1Pc. 3/4" 12pt. Socket 22 mm
- 1Pc. 3/4" 12pt. Socket 23 mm
- 1Pc. 3/4" 12pt. Socket 24 mm
- 1Pc. 3/4" 12pt. Socket 26 mm
- 1Pc. 3/4" 12pt. Socket 27 mm
- 1Pc. 3/4" 12pt. Socket 28 mm
- 1Pc. 3/4" 12pt. Socket 29 mm
- 1Pc. 3/4" 12pt. Socket 30 mm
- 1Pc. 3/4" 12pt. Socket 31 mm
- 1Pc. 3/4" 12pt. Socket 32 mm
- 1Pc. 3/4" 12pt. Socket 34 mm
- 1Pc. 3/4" 12pt. Socket 36 mm
- 1Pc. 3/4" 12pt. Socket 38 mm
- 1Pc. 3/4" 12pt. Socket 41 mm
- 1Pc. 3/4" 12pt. Socket 46 mm
- 1Pc. 3/4" 12pt. Socket 50 mm
- 1Pc. 1" 12pt. Socket 55 mm
- 1Pc. 1" 12pt. Socket 60 mm
- 1Pc. 1" 12pt. Socket 65 mm
- 1Pc. 3/4" Drive T-Handle 20"
- 1Pc. 3/4" Drive Strengthening Extensions 8"
- 1Pc. 3/4" Drive Strengthening Extensions 20"
- 1Pc. 3/4" L-Shaped Extensions 6"
- 1Pc. 1" Three-Way Adapter (1" F x 3/4" M)
- 1Pc. 3/4" Quick-Release Ratchets 20"

No.			
09016	-	1	23

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



09131 25Pc. 13mm Drive Pass-Thru Socket Set

- 13Pc. 13mm Drive Pass-Thru Socket (3.5,4.4,5.5,5.5,6.7,8.9,10,11,12,13mm)
- 9Pc. 13mm Drive SAE Pass-Thru Socket (5/32",3/16",1/2",9/16",5/8",11/16",3/4",7/8",1")
- 1Pc. 13mm Drive Pass-Thru Ratchet
- 1Pc. 13mm Drive Pass-Thru Extension Bar 3"
- 1Pc. 13mm Drive Pass-Thru Socket Adaptor 1/4" Drive
- Pass-through socket can be used to fasten nut on the long screw while standard socket can not work, extending the working range of socket
- Pass-through ratchet offers smaller drive head dimension and only 5° of tooth movement, fits to operate in tight working space
- Pass-through ratchet can connect standard socket for use through adaptor

No.			
09131	6	12	9.1

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



09132 30Pc. 13x20mm Drive Pass-Thru Socket Set

- 13Pc. 13mm Drive Pass-Thru Socket (3.5,4.4,5.5,5.5,6.7,8.9,10,11,12,13mm)
- 10Pc. 20mm Drive Pass-Thru Socket (10,11,12,13,14,15,16,17,18,19mm)
- 1Pc. 13mm Drive Pass-Thru Ratchet
- 1Pc. 20mm Drive Pass-Thru Ratchet
- 1Pc. 13mm Drive Pass-Thru Socket Adaptor 1/4" Drive
- 1Pc. 20mm Drive Pass-Thru Socket Adaptor 1/4" Drive
- 1Pc. 20mm Drive Pass-Thru Socket Adaptor 3/8" Drive
- 1Pc. 13mm Drive Pass-Thru Extension Bar 3"
- 1Pc. 20mm Drive Pass-Thru Extension Bar 3"
- Pass-through socket can be used to fasten nut on the long screw while standard socket can not work, extending the working range of socket
- Pass-through ratchet offers smaller drive head dimension and only 5° of tooth movement, fits to operate in tight working space
- Pass-through ratchet can connect standard socket for use through adaptor

No.			
09132	4	8	15.1

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



09134 21Pc. 20mm Drive Pass-Thru Socket Set

- 10Pc. 20mm Drive Pass-Thru Socket (10,11,12,13,14,15,16,17,18,19mm)
- 7Pc. 20mm SAE Drive Pass-Thru Socket (3/8",7/16",1/2",9/16",5/8",11/16",3/4")
- 1Pc. 20mm Drive Pass-Thru Ratchet
- 1Pc. 20mm Drive Pass-Thru Extension Bar 3"
- 1Pc. 20mm Drive Pass-Thru Socket Adaptor 1/4" Drive
- 1Pc. 20mm Drive Pass-Thru Socket Adaptor 3/8" Drive
- Pass-through socket can be used to fasten nut on the long screw while standard socket can not work, extending the working range of socket
- Pass-through ratchet offers smaller drive head dimension and only 5° of tooth movement, fits to operate in tight working space
- Pass-through ratchet can connect standard socket for use through adaptor

No.			
09134	3	12	18.8

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



1/4" Dr. 6Pt. Socket

No.	Ø	L(mm)			
11101	5/32"	24.5	12	-	-
11102	3/16"	24.5	12	-	-
11103	7/32"	24.5	12	-	-
11104	1/4"	24.5	12	-	-
11105	9/32"	24.5	12	-	-
11106	5/16"	24.5	12	-	-
11107	11/32"	24.5	12	-	-
11108	3/8"	24.5	12	-	-
11109	7/16"	24.5	6	-	-
11110	1/2"	24.5	6	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



1/4" Dr. 6Pt. Deep Socket

No.	Ø	L(mm)			
11201	3/16"	49	12	-	-
11202	7/32"	49	12	-	-
11203	1/4"	49	12	-	-
11204	9/32"	49	12	-	-
11205	5/16"	49	12	-	-
11206	11/32"	49	12	-	-
11207	3/8"	49	6	-	-
11208	7/16"	49	6	-	-
11209	1/2"	49	6	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



Tool Knowledge Station

The locking connecting rod can be used singly or in groups. Each connecting rod is locked to each other to ensure the locking of the socket head in the end.



Press the button to lock



Press the button again to unlock



Capable of preventing socket extension or universal joint from dropping, and requiring just one hand for operation, featuring convenient and efficient



Each locking extension rod is provided with a locking/quick release button. Press the locking/quick release button to lock the socket head. Each connecting rod is locked to each other to ensure the locking of the socket head in the end, which can be released by press the button again.



1/4" Dr. 6Pt. Socket

No.	Ø	L(mm)			
11301	3.5	24.5	12	-	-
11302	4	24.5	12	-	-
11303	4.5	24.5	12	-	-
11304	5	24.5	12	-	-
11305	5.5	24.5	12	-	-
11306	6	24.5	12	-	-
11307	7	24.5	12	-	-
11308	8	24.5	12	-	-
11309	9	24.5	12	-	-
11310	10	24.5	12	-	-
11311	11	24.5	6	-	-
11312	12	24.5	6	-	-
11313	13	24.5	6	-	-
11314	14	24.5	6	-	-


⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



1/4" Dr. 6Pt. Deep Socket

No.	Ø	L(mm)			
11401	4	49	12	-	-
11402	5	49	12	-	-
11403	6	49	12	-	-
11404	7	49	12	-	-
11405	8	49	12	-	-
11406	9	49	6	-	-
11407	10	49	6	-	-
11408	11	49	6	-	-
11409	12	49	6	-	-
11410	13	49	6	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.

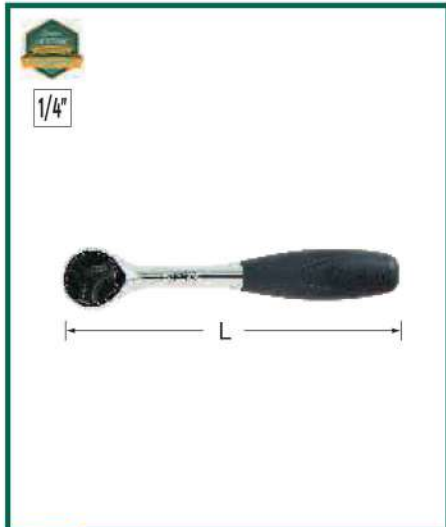

11901 1/4" Dr. Quick Release Ratchet 5"

• Capable of quick release with one hand

No.	L(mm)			
11901	143	4	-	-



11902 1/4" Dr. Quick Release Ratchet 5"

- Turning with one hand
- Easy and free operation
- Capable of quick release
- Operation with only one hand

No.	L(mm)			
11902	147	4	80	13.6



1/4" Dr. Extension Bar

- Unique design for dual function
- Turning function
- Acting as standard extension after being inserted

No.	Spec.	L(mm)			
11903	2"	50	12	-	-
11904	4"	100	12	-	-



11905 1/4"Dr. Quick-Release Ratchet(Tear Drop)

- Made of Chrom Vanadium steel
- Convenient single hand direction change switch
- Quick-release capability to easily eject an engaged socket even under slippery conditions

No.	L(mm)			
11905	143	4	24	4.2



11906 1/4"Dr. Quick-Release Ratchet(Tear Drop)

- Made of Chrome Vanadium steel
- Convenient single hand direction change switch
- Quick-release capability to easily eject an engaged socket even under slippery conditions

No.	L(mm)			
11906	143	4	24	4.1




11909 1/4" Dr. Quick Release Ratchet 5"

No.	L(mm)			
11909	140	6	-	-



SATA drop-shaped ratchet featuring:
 Durability: Special dustproof structure for harsh working conditions
 Ultra-thin appearance: Suitable for narrow working environment
 Convenient operation: Turning and releasing socket with only one hand

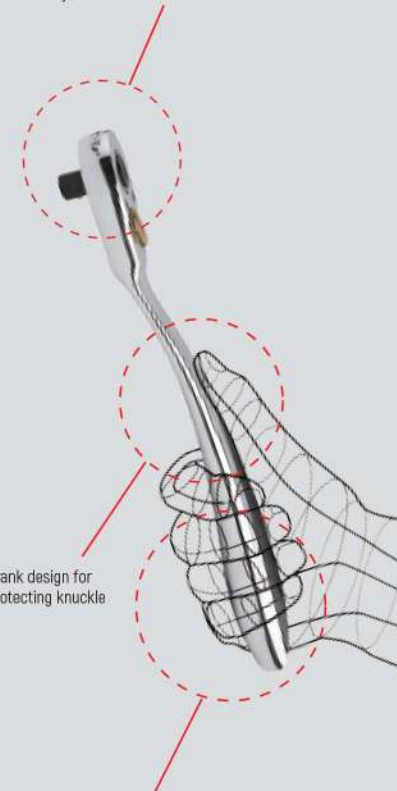

Crank design for protecting knuckle

Handle feeling comfortable for fatigue reduction



1/4"



11910 1/4" Dr. Sliding T-Handle 4"

No.	L(mm)			
11910	100	6	-	-



1/4"



11970 1/4" Dr. Offset Quick Release Ratchet

- SATA teardrop shaped rotary head
- Comfortable grip for effective use
- Crank design providing special protection for finger joints during use

No.	L(mm)			
11970	153	4	40	7.5



1/4"



11911 1/4" Dr. Spinner Handle

- Handle end to be connected with 6.3mm ratchet

No.	L(mm)			
11911	150	6	-	-



1/4"



11912 1/4" Dr. Universal Joint

No.	Male	Female			
11912	1/4"	1/4"	12	-	-



1/4"



11913 1/4" Dr. Socket Adaptor 1/4"Fx3/8"M

No.	Male	Female			
11913	1/4"	3/8"	12	-	-



1/4"



11914 1/4" Dr. Bit Adaptor 1/4"Fx1/4"Hexagon

No.	Male	Female			
11914	1/4"	1/4"	12	-	-



1/4"



11922 1/4" Dr. Flexible Extension Bar 6"

No.	Male	L(mm)			
11922	1/4"	150	25	100	8.3



3/8"

SAE



3/8" Dr. 6Pt. Socket

No.	Ø	L(mm)			
12101	1/4"	25	6	-	-
12102	5/16"	25	6	-	-
12103	3/8"	25	6	-	-
12104	7/16"	25	6	-	-
12105	1/2"	25	6	-	-
12106	9/16"	25	6	-	-
12107	5/8"	25	6	-	-
12108	11/16"	25	6	-	-
12109	3/4"	25	6	-	-
12110	13/16"	25	4	-	-
12111	7/8"	25	4	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



3/8"

SAE



3/8" Dr. 6Pt. Deep Socket

No.	Ø	L(mm)			
12201	3/8"	63.5	6	-	-
12202	7/16"	63.5	6	-	-
12203	1/2"	63.5	6	-	-
12204	9/16"	63.5	6	-	-
12205	5/8"	63.5	6	-	-
12206	11/16"	63.5	6	-	-
12207	3/4"	63.5	6	-	-
12208	13/16"	63.5	4	-	-
12209	7/8"	63.5	4	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



3/8"



3/8" Dr. 6Pt. Socket

No.	Ø	L(mm)			
12301	6	25	6	-	-
12302	7	25	6	-	-
12303	8	25	6	-	-
12304	9	25	6	-	-
12305	10	25	6	-	-
12306	11	25	6	-	-
12307	12	25	6	-	-
12308	13	25	6	-	-
12309	14	25	6	-	-
12310	15	25	6	-	-
12311	16	25	6	-	-
12312	17	25	6	-	-
12313	18	25	6	-	-
12314	19	25	6	-	-
12315	20	25	4	-	-
12316	21	25	4	-	-
12317	22	25	4	-	-
12318	24	25	4	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



3/8" Dr. 6Pt. Deep Socket

No.	Ø	L(mm)			
12401	8	63.5	6	-	-
12402	9	63.5	6	-	-
12403	10	63.5	6	-	-
12404	11	63.5	6	-	-
12405	12	63.5	6	-	-
12406	13	63.5	6	-	-
12407	14	63.5	6	-	-
12408	15	63.5	6	-	-
12409	16	63.5	6	-	-
12410	17	63.5	6	-	-
12411	18	63.5	6	-	-
12412	19	63.5	6	-	-
12413	20	63.5	4	-	-
12414	21	63.5	4	-	-
12415	22	63.5	4	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



3/8" Dr. Torx® Socket

No.	Ø	L(mm)			
12701	E4	26	6	-	-
12702	E5	26	6	-	-
12703	E6	26	6	-	-
12704	E7	26	6	-	-
12705	E8	26	6	-	-
12706	E10	26	6	-	-
12707	E11	26	6	-	-
12708	E12	26	6	-	-
12709	E14	26	6	-	-
12710	E16	26	6	-	-
12711	E18	26	6	-	-
12712	E20	26	6	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



12901 3/8" Dr. Quick Release Ratchet 8"

• Capable of quick release with one hand

No.	L(mm)			
12901	203	4	-	-



12902 3/8" Dr. Quick Release Ratchet 8"

- Turning with one hand
- Easy and free operation
- Capable of quick release
- Operation with only one hand

No.	L(mm)			
12902	203	4	60	19



3/8" Dr. Extension Bar

- Turning function
- Acting as standard extension after being inserted

No.	L			
12903	3"(75mm)	6	72	6.4
12904	6"(150mm)	6	36	6.2
12905	10"(250mm)	6	36	9.5



3/8" Dr. Locking Extension Bar


- Unique locking device, preventing socket extension or universal joint from dropping, and requiring just one hand for operation, being convenient and efficient

No.	L			
12906	3"(75mm)	6	-	-
12907	6"(150mm)	6	-	-
12908	10"(250mm)	6	-	-



12909 3/8" Dr. Flexible Handle 8"

No.	L(mm)			
12909	213	6	-	-

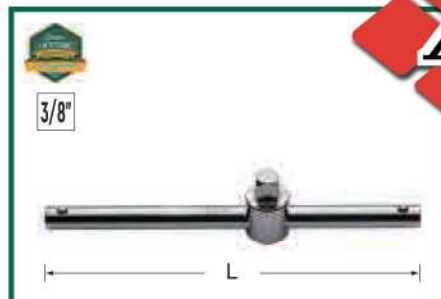

12910 3/8" Dr. Sliding T-Handle 8"

No.	L(mm)			
12910	165	6	-	-



12911 3/8" Dr. Flex-Head Quick Release Ratchet

No.	L(mm)			
12911	275	4	-	-



12912 3/8" Dr. Universal Joint

No.	Male	Female			
12912	3/8"	3/8"	6	-	-



3/8" Dr. Socket Adaptor

No.	Female	Male			
12913	3/8"	1/4"	6	-	-
12914	3/8"	1/2"	6	-	-



12917 3/8" Dr. Bit Adaptor 3/8"Fx1/4"Hexagon

No.	Female	Ø(mm)			
12917	3/8"	6.3(1/4")	6	-	-



12971 3/8" Dr. Quick-Release Ratchet (Tear Drop)

- Made of Chrome Vanadium steel
- Convenient single hand direction change switch
- Quick-release capability to easily eject an engaged socket even under slippery conditions

No.	L(mm)			
12971	200	4	24	7.7



SAE



1/2" Dr. 6Pt. Deep Socket

No.	Ø	L(mm)			
13201	3/8"	77	6	-	-
13202	7/16"	77	6	-	-
13203	1/2"	77	6	-	-
13204	9/16"	77	6	-	-
13205	5/8"	77	6	-	-
13206	11/16"	77	6	-	-
13207	3/4"	77	6	-	-
13208	13/16"	77	4	-	-
13210	15/16"	77	4	-	-
13211	1"	77	4	-	-
13212	1-1/16"	77	4	-	-
13213	1-1/8"	77	4	-	-
13214	1-1/4"	77	6	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



12922 3/8" Dr. Flexible Extension Bar 8"

No.	L(mm)	Male			
12922	150	3/8"	25	100	14.4



12972 3/8" Dr. Quick-Release Ratchet (Tear Drop)

- Made of Chrome Vanadium steel
- Convenient single hand direction change switch
- Quick-release capability to easily eject an engaged socket even under slippery conditions

No.	L(mm)			
12972	200	4	24	7.3



12930 3/8" Dr. 3-Way Socket Adaptor

No.	Female	Male			
12930	3/8"	1/2"	6	-	-



SAE



1/2" Dr. 6Pt. Socket

No.	Ø	L(mm)			
13101	5/16"	37.8	4	-	-
13102	3/8"	37.8	6	-	-
13103	7/16"	37.8	6	-	-
13104	1/2"	37.8	6	-	-
13105	9/16"	37.8	6	-	-
13106	5/8"	37.8	6	-	-
13107	11/16"	37.8	6	-	-
13108	3/4"	37.8	6	-	-
13109	13/16"	37.8	4	-	-
13110	7/8"	37.8	4	-	-
13111	15/16"	37.8	4	-	-
13112	1"	37.8	4	-	-
13113	1-1/16"	37.8	4	-	-
13114	1-1/8"	37.8	4	-	-
13115	1-1/4"	37.8	2	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



SAE



1/2" Dr. 6Pt. Socket

No.	Ø	L(mm)			
13319	8	38	6	-	-
13320	9	38	6	-	-
13301	10	38	6	-	-
13302	11	38	6	-	-
13303	12	38	6	-	-
13304	13	38	6	-	-
13305	14	38	6	-	-
13306	15	38	6	-	-
13307	16	38	6	-	-
13308	17	38	6	-	-
13309	18	38	6	-	-
13310	19	38	6	-	-
13311	20	38	4	-	-
13312	21	38	4	-	-
13313	22	38	4	-	-
13314	23	38	4	-	-
13315	24	38	4	-	-
13316	27	38	4	-	-
13317	30	38	2	-	-
13318	32	38	2	-	-
13321	34	38	2	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



12970 3/8" Dr. Offset Quick Release Ratchet

- SATA teardrop shaped rotary head
- Comfortable grip for effective use
- Crank design providing special protection for finger joints during use

No.	L(mm)			
12970	217	4	32	14.1



1/2"



1/2" Dr. 6Pt. Deep Socket

No.	Ø	L(mm)			
13401	10	77	6	-	-
13402	11	77	6	-	-
13403	12	77	6	-	-
13404	13	77	6	-	-
13405	14	77	6	-	-
13406	15	77	6	-	-
13407	16	77	6	-	-
13408	17	77	6	-	-
13409	18	77	6	-	-
13410	19	77	6	-	-
13411	20	77	4	-	-
13412	21	77	4	-	-
13413	22	77	4	-	-
13414	24	77	4	-	-
13415	27	77	4	-	-
13416	30	77	2	-	-
13417	32	77	2	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



1/2"

SAE



1/2" Dr. 12Pt. Socket

No.	Ø	L(mm)			
13501	5/16"	37.8	6	-	-
13502	3/8"	37.8	6	-	-
13503	7/16"	37.8	6	-	-
13504	1/2"	37.8	6	-	-
13505	9/16"	37.8	6	-	-
13506	5/8"	37.8	6	-	-
13507	11/16"	37.8	6	-	-
13508	3/4"	37.8	6	-	-
13509	13/16"	37.8	4	-	-
13510	7/8"	37.8	4	-	-
13511	15/16"	37.8	4	-	-
13512	1"	37.8	4	-	-
13513	1-1/16"	37.8	4	-	-
13514	1-1/8"	37.8	4	-	-
13515	1-1/4"	37.8	2	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



1/2"



1/2" Dr. Torx® Socket

No.	Ø	L(mm)			
13701	E10	38	6	-	-
13702	E12	38	6	-	-
13703	E14	38	6	-	-
13704	E16	38	6	-	-
13705	E18	38	6	-	-
13706	E20	38	4	-	-
13707	E22	38	4	-	-
13708	E24	40	4	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



1/2"



1/2" Dr. 12Pt. Deep Socket

No.	Ø(mm)	L(mm)			
13810	10	77	6	84	4.9
13812	12	77	6	84	4.9
13813	13	77	6	84	4.9
13814	14	77	6	84	5.2
13816	16	77	6	84	5.2
13817	17	77	6	84	5.2
13818	18	77	6	84	5.2
13819	19	77	6	84	5.4

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



1/2"



13901 1/2" Dr. Quick Release Ratchet 10"

• Capable of quick release with one hand

No.	L(mm)			
13901	252	4	-	-



Tool Knowledge Station



SATA metric socket is knurled, whereas the SAE one with dual groove for easy selection.



Box end with SATA drive structure to avoid nut slipping, with point of force moved to the plane of the hexagon nut



SATA socket made of Cr-V and subjected to special process for thinness, higher strength (compared with common socket), and easy operation in narrow space



Certain SATA socket with reduced OD for lightness and easy operation in narrow space

Never use extension bar on the tool or tap it with hammer
Check the tool regularly for safety and efficiency, and do not use any worn or cracked tool.
Select tenon and socket dimensions correctly



1/2"



1/2" Dr. 12Pt. Socket

No.	Ø	L(mm)			
13619	8	38	6	-	-
13620	9	38	6	-	-
13601	10	38	6	-	-
13602	11	38	6	-	-
13603	12	38	6	-	-
13604	13	38	6	-	-
13605	14	38	6	-	-
13606	15	38	6	-	-
13607	16	38	6	-	-
13608	17	38	6	-	-
13609	18	38	6	-	-
13610	19	38	6	-	-
13611	20	38	4	-	-
13612	21	38	4	-	-
13613	22	38	4	-	-
13614	23	38	4	-	-
13615	24	38	4	-	-
13616	27	38	4	-	-
13617	30	38	2	-	-
13618	32	38	2	-	-


⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



13902 1/2" Dr. Quick Release Ratchet 10"

- Turning with one hand
- Easy and free operation
- Capable of quick release
- Operation with only one hand

No.	L(mm)			
13902	255	4	36	22.6

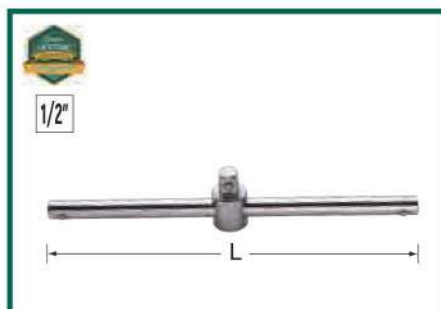

13910 1/2" Dr. Quick Release Ratchet 10"

No.	L(mm)			
13910	247	4	-	-



13919 1/2" Dr. L-Shaped Wrench 10"

No.	L(mm)	Female			
13919	260	1/2"	6	-	-



1/2" Dr. Extension Bar

- Turning function
- Acting as standard extension after being inserted

No.	Size	L(mm)			
13904	5"	125	4	-	-
13905	10"	250	4	-	-



13912 1/2" Dr. Universal Joint

No.	Male	Female			
13912	1/2"	1/2"	4	-	-



13930 1/2" Dr. 3-Way Socket Adaptor

No.	Female	Male			
13930	1/2"	3/8"	4	-	-



1/2" Dr. Locking Extension Bar

- Unique locking device, preventing socket extension or universal joint from dropping, and requiring just one hand for operation, being convenient and efficient

No.	L			
13906	3"(75mm)	4	-	-
13907	5"(125mm)	4	-	-
13908	10"(250mm)	4	-	-



13913 1/2" Dr. Socket Adaptor 1/2"Fx3/8"M

No.	Male	Female			
13913	1/2"	3/8"	4	-	-



13950 1/2"Dr Adapter (1/2" F X 3/4" M)

- Made of Chrome Vanadium steel

No.	L(mm)	Female	Male			
13950	35.1	1/2"	3/4"	4	120	15.4




1/2" Dr. Flexible Handle

No.	L			
13909	10"(250mm)	4	-	-
13911	15"(375mm)	4	-	-
13951	17"(432mm)	4	24	22.9



13914 1/2" Dr. Bit Adaptor 1/2"Fx5/16"Hexagon

No.	Size	Female			
13914	8(5/16")	1/2"	6	-	-

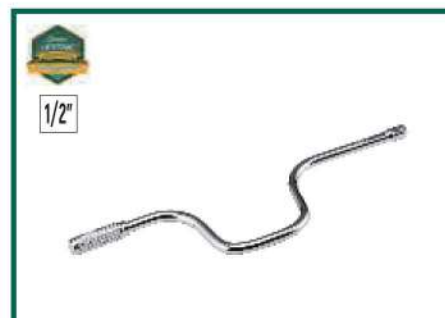

17001 1/2" Dr. Speeder Handle

No.	Female			
17001	12.5"	6	24	11.3



13970 1/2" Dr. Offset Quick Release Ratchet

- SATA teardrop shaped rotary head
- Comfortable grip for effective use
- Crank design providing special protection for finger joints during use

No.	L(mm)			
13970	261	4	20	13.3



13971 1/2" Dr. Quick-Release Ratchet (Tear Drop)

- Made of Chrome Vanadium steel
- Convenient single hand direction change switch
- Quick-release capability to easily eject an engaged socket even under slippery conditions

No.	L(mm)			
13971	250	4	24	12.8



13972 1/2" Dr. Quick Release Ratchet (Tear Drop)

- Made of Chrome Vanadium steel
- Convenient single hand direction change switch
- Quick-release capability to easily eject an engaged socket even under slippery conditions

No.	L(mm)			
13972	250	4	24	14.8



16901 3/4" Dr. Quick Release Ratchet 20"

- Capable of quick release with one hand

No.	Spec.	L(mm)			
16901	20"	500	1	8	22.3



3/4" Dr. 12Pt. Socket

No.	Ø(mm)	L(mm)			
16602	19	47.5	4	-	-
16603	21	49.5	4	-	-
16604	22	49.5	4	-	-
16605	23	49.5	4	-	-
16606	24	49.5	4	-	-
16607	25	50	4	-	-
16608	26	50	4	-	-
16609	27	52	4	-	-
16610	28	52	4	-	-
16611	29	52	4	-	-
16612	30	54	4	-	-
16613	32	56	4	-	-
16614	33	56	4	-	-
16615	34	56	4	-	-
16616	35	56	2	-	-
16617	36	58	2	-	-
16618	38	60	2	-	-
16619	41	64	2	-	-
16620	46	68	2	-	-
16622	50	72	2	-	-
16623	55	76	1	-	-
16624	60	78	1	-	-

▲ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



1/2" Dr. Locking Extension Bar


- Turning function
- Acting as standard extension after being inserted

No.	Spec.	L(mm)			
16902	4"	100	6	-	-
16903	8"	200	3	-	-
16904	16"	400	1	-	-



16905 3/4" Dr. Flexible Handle 18"

No.	L(mm)			
16905	450	1	-	-

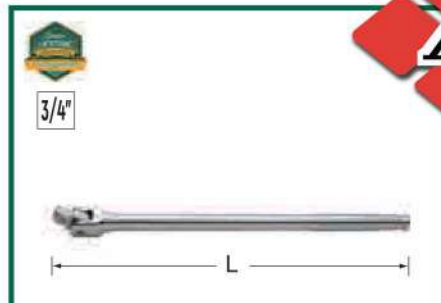

16906 3/4" Dr. Flexible Handle 18"

No.	L(mm)			
16906	450	1	-	-



16907 3/4" Dr. Universal Joint

No.	Male	Female			
16907	3/4"	3/4"	3	-	-



16908 3/4" F X 1/2" M Adapter

- Made of Chrome Vanadium steel

No.	L(mm)	Female	Male			
16908	35.1	1/2"	3/4"	6	36	8.4



16919 3/4" Dr. L-Shaped Wrench 13"

No.	Female	L(mm)			
16919	3/4"	380	1	-	-



13mm Drive Pass-Thru Socket

No.	Spec. (mm)			
19001	3.5	6	-	-
19002	4	6	-	-
19003	4.5	6	-	-
19004	5	6	-	-
19005	5.5	6	-	-
19006	6	6	-	-
19007	7	6	-	-
19008	8	6	-	-
19009	9	6	-	-
19010	10	6	-	-
19011	11	6	-	-
19012	12	6	-	-
19013	13	6	-	-
No.	Spec.			
19102	3/16"	6	-	-
19103	7/32"	6	-	-
19104	1/4"	6	-	-
19105	9/32"	6	-	-
19107	3/8"	6	96	1.3
19108	7/16"	6	-	-
19109	1/2"	6	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



Drive Pass-Thru Ratchet

No.	Spec. (mm)	L(mm)			
19201	13	145	6	48	10.8
19301	20	203	8	32	9.2
19401	30	253	4	24	7.5



Drive Pass-Thru Extension Bar

No.	Spec.	L			
19071	13"	3" (75mm)	6	-	-
19081	20"	3" (75mm)	6	-	-



1/4" Dr. Bit Socket, Hexagon

• Bit made from S2 material for durability and anti-slipping

No.	Spec.	L(mm)			
21201	3	36.5	12	-	-
21202	4	36.5	12	-	-
21203	5	36.5	12	-	-
21204	6	36.5	12	-	-
21205*	8	36.5	12	-	-
21206*	7	36.5	12	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



1/4" Dr. Bit Socket, Phillips

• Bit made from S2 material for durability and anti-slipping

No.	Spec.	L(mm)			
21301	#1	36.5	12	-	-
21302	#2	36.5	12	-	-
21303	#3	36.5	12	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



20mm Drive Pass-Thru Socket

No.	Spec. (mm)			
19021	10	6	-	-
19022	11	6	-	-
19023	12	6	-	-
19024	13	6	-	-
19025	14	6	-	-
19026	15	6	-	-
19027	16	6	-	-
19028	17	6	-	-
19029	18	6	-	-
19030	19	6	-	-
No.	Spec.			
19121	3/8"	6	-	-
19122	7/16"	6	-	-
19123	1/2"	6	-	-
19124	9/16"	6	-	-
19125	5/8"	6	-	-
19126	11/16"	6	-	-
19127	3/4"	6	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



Drive Pass-Thru Socket Adaptor

No.	Male	Spec. (mm)			
19072	1/4"	13	24	-	-
19082	1/4"	20	24	-	-
19083	3/8"	20	24	96	4.6
19092	1/2"	30	18	-	-



1/4" Dr. Bit Socket, Torx®

• Bit made from S2 material for durability and anti-slipping

No.	Spec.	L(mm)			
21101	T-8	36.5	12	-	-
21102	T-10	36.5	12	-	-
21103	T-15	36.5	12	-	-
21104	T-20	36.5	12	-	-
21105	T-25	36.5	12	-	-
21106	T-30	36.5	12	-	-
21107	T-40	36.5	12	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



1/4" Dr. Bit Socket, Pozidrive

• Bit made from S2 material for durability and anti-slipping

No.	Spec.	L(mm)			
21401	#1	36.5	12	-	-
21402	#2	36.5	12	-	-
21403	#3	36.5	12	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



1/4" Dr. Bit Socket, Slotted

• Bit made from S2 material for durability and anti-slipping

No.	Spec.	L(mm)			
21501	4.0	36.5	12	-	-
21502	5.5	36.5	12	-	-
21503	6.5	36.5	12	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



3/8" Dr. Bit Socket, Torx®

• Bit made from S2 material for durability and anti-slipping

No.	Spec.	L(mm)			
22101	T-10	48	6	-	-
22102	T-15	48	6	-	-
22103	T-20	48	6	-	-
22104	T-25	48	6	-	-
22105	T-27	48	6	-	-
22106	T-30	48	6	-	-
22107	T-40	48	6	-	-
22108	T-45	48	6	-	-
22109	T-50	48	6	-	-
22110*	T-55	48	6	-	-
22111*	T-60	48	6	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



3/8" Dr. Bit Socket, Hexagon

• Bit made from S2 material for durability and anti-slipping

No.	Spec. (mm)	L(mm)			
22201	3	48	6	-	-
22202	4	48	6	-	-
22203	5	48	6	-	-
22204	6	48	6	-	-
22205*	7	48	6	-	-
22206*	8	48	6	-	-
22207*	10	48	6	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



3/8" Dr. Bit Socket, Phillips

• Bit made from S2 material for durability and anti-slipping

No.	Spec.	L(mm)			
22301	#1	48	6	-	-
22302	#2	48	6	-	-
22303	#3	48	6	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



3/8" Dr. Bit Socket, Pozidrive

• Bit made from S2 material for durability and anti-slipping

No.	Spec.	L(mm)			
22401	#1	48	6	-	-
22402	#2	48	6	-	-
22403	#3	48	6	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



3/8" Dr. Bit Socket, Slotted

• Bit made from S2 material for durability and anti-slipping

No.	Spec. (mm)	L(mm)			
22501	5.5	48	6	-	-
22502*	6.5	48	6	-	-
22503*	8.0	48	6	-	-
22504	4.0	48	6	72	3.9

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



High quality of SATA bits Socket



1. Bit made of high-grade alloy steel (S-2) for durability and anti-slipping
2. Length of 50MM, 100MM or custom one available as required
3. 6-point screwdriver bar inserted into 6-point socket for anti-slipping



4. Cr-V socket joint for high torque
5. Spec. of 6.3MM, 10MM and 12.5MM available

SATA Bit Socket Type




3/8" Dr. Bit Socket, Tamper-Proof Torx®

• Bit made from S2 material for durability and anti-slipping
• Bit with tamper suitable for professional Torx® screws

No.	Spec.	L(mm)			
22601	T-45	48	6	-	-
22602	T-50	48	6	-	-
22603*	T-55	48	6	-	-
22604*	T-60	48	6	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.

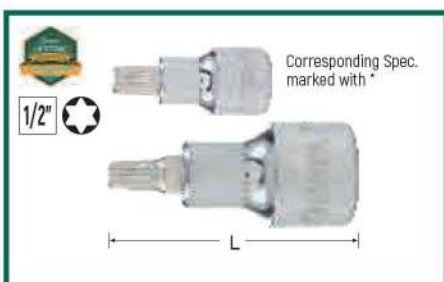


1/2" Dr. Bit Socket, 50mm Length, Torx®

• Bit made from S2 material for durability and anti-slipping

No.	Spec.	L(mm)			
24101	T-20	55	6	-	-
24102	T-25	55	6	-	-
24103	T-27	55	6	-	-
24104	T-30	55	6	-	-
24105	T-40	55	6	-	-
24106	T-45	55	6	-	-
24107	T-50	55	6	-	-
24108*	T-55	55	6	-	-
24109*	T-60	55	6	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.

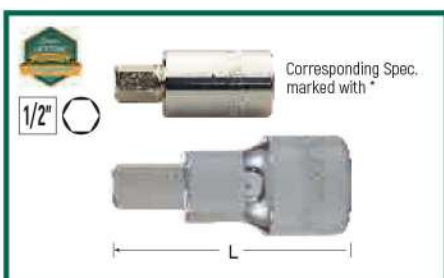


1/2" Dr. Bit Socket, 50mm Length, Hexagon

• Bit made from S2 material for durability and anti-slipping

No.	Spec.	L(mm)			
24201	4	55	6	-	-
24202	5	55	6	-	-
24203	6	55	6	-	-
24204	7	55	6	-	-
24205	8	55	6	-	-
24206	10	55	6	-	-
24207*	12	55	6	-	-
24208*	14	55	6	-	-
24209*	17	55	6	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.

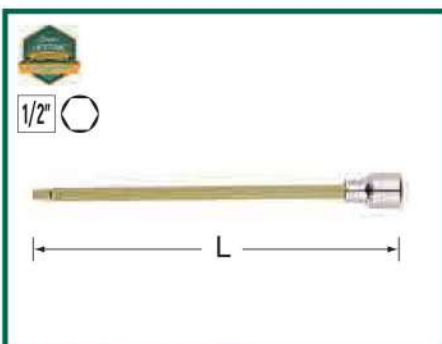


1/2" Dr. Bit Socket, Hexagon

- Used for auto repair (Volkswagen, Audi, GM, etc.)
- Bit made from S2 material for durability and anti-slipping

No.	Spec. (mm)	L(mm)			
24301	6	70	6	-	-
24302	8	120	6	-	-
24303	6	250	6	-	-
24304	5	180	6	-	-
24305	6	140	6	-	-
24306	10	140	6	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.

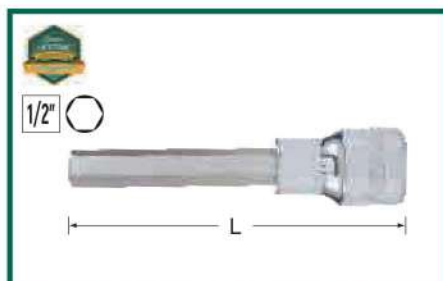


1/2" Dr. Bit Socket, 100mm Length, Hexagon

- Bit made from S2 material for durability and anti-slipping

No.	Spec. (mm)	L(mm)			
25201	4	100	6	-	-
25202	5	100	6	-	-
25203	6	100	6	-	-
25204	7	100	6	-	-
25205	8	100	6	-	-
25206	10	100	6	-	-
25207	12	100	6	-	-
25208	14	100	6	-	-
25209	17	100	6	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.

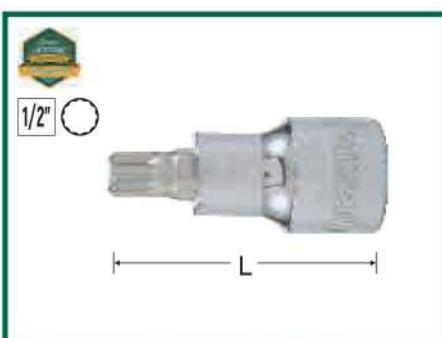

1/2" Dr. Bit Socket, 50mm Length, Triple Square

- Bit made from S2 material for durability and anti-slipping

No.	Spec.	L(mm)			
24801	M-5	55	6	-	-
24802	M-6	55	6	-	-
24803	M-8	55	6	-	-
24804	M-10	55	6	-	-
24805	M-12	55	6	-	-
24806	M-14	55	6	-	-
24807	M-16	55	6	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.




1/2" Dr. Bit Socket, 100mm Length, Triple Square

- Bit made from S2 material for durability and anti-slipping

No.	Spec.	L(mm)			
25801	M-5	100	6	-	-
25802	M-6	100	6	-	-
25803	M-8	100	6	-	-
25804	M-10	100	6	-	-
25805	M-12	100	6	-	-
25806	M-14	100	6	-	-
25807	M-16	100	6	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.

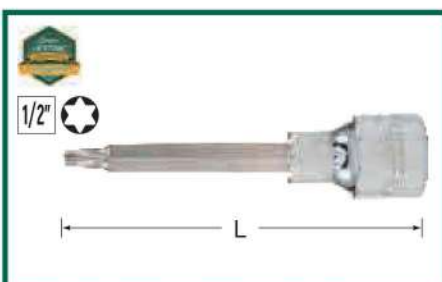

1/2" Dr. Bit Socket, 100mm Length, Torx®

- Bit made from S2 material for durability and anti-slipping

No.	Spec.	L(mm)			
25101	T-20	100	6	-	-
25102	T-25	100	6	-	-
25103	T-27	100	6	-	-
25104	T-30	100	6	-	-
25105	T-40	100	6	-	-
25106	T-45	100	6	-	-
25107	T-50	100	6	-	-
25108	T-55	100	6	-	-
25109	T-60	100	6	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.



1/2" Dr. Bit Socket, Triple Square

- Used for auto repair
- Bit made from S2 material for durability and anti-slipping

No.	Spec.	L(mm)			
25901	M-10	120	6	-	-
25902	M-12	140	6	-	-

⚠ These sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.