



## Luminaire Specifications

Power	50W, 100W, 150W, 200W
Input Voltage	AC220 – 240V 50/60Hz
Fitting Color	Black
Material	Die Cast Aluminum, polycarbonate
Ingress Protection	IP 65
Operating Temperature	20 - 50°C

## Product Features

- High brightness LED chips, high light efficiency
- High purity and density, excellent heat dissipation
- Long lifetime

## Application


- Road Lighting
- Parking Area
- Residential Road
- Factory Area
- Access way
- Express Road



Code	Watt	Lumen	Size	Hole Ø	Degree
HLP-EC-SLCET50-PZ-V	50W	5100 Lm	410*165*70 mm	50mm	120°x 75°
HLP-EC-SLCET100-PZ-V	100W	10200 Lm	485*210*80 mm	60mm	120°x 75°
HLP-EC-SLCET150-PZ-V	150W	15350 Lm	580*242*80 mm	65mm	120°x 75°
HLP-EC-SLCET200-PZ-V	200W	20200 Lm	685*300*80 mm	65mm	120°x 75°

### LED Technical Data

Light LED Source	Lumileds LUXEON 3030
Color Temperature	3000K Warm White 4000K Nature White 5700K Cool White
Rendering Index	>RA 70
LED life cycle	LM80 52,000hours @ 35°C

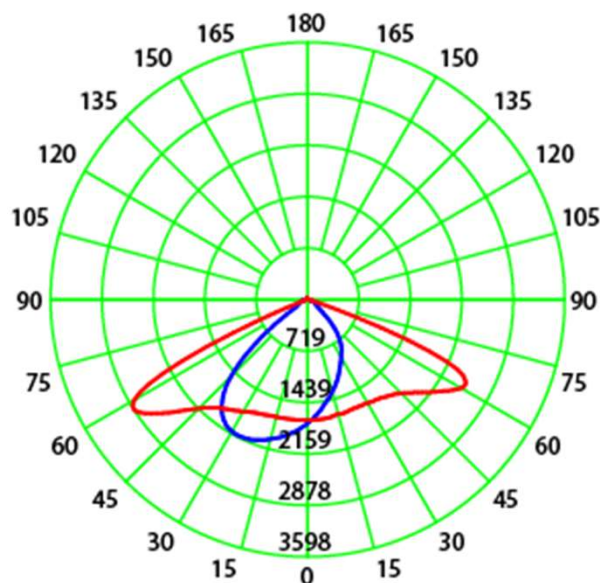

### LED Driver Technical Data

LED Driver Brands	HLP Driver
Power Factor	>0.9
Life Cycle	>20,000 hours

