




Model		S-25-5	S-25-12	S-25-15	S-25-24	S-25-48
OUTPUT	DC VOLTAGE	5V	12V	15V	24V	48V
	RATED CURRENT	5A	2.1A	1.7A	1.1A	0.52A
	CURRENT RANGE	0 ~ 5A	0 ~ 2.1A	0 ~ 1.7A	0 ~ 1.1A	0 ~ 0.52A
	RATED POWER	25W	25.2W	25.5W	26.4W	25W
	RIPPLE NOISE (Max)	50mVp-p	50mVp-p	80mVp-p	100mVp-p	100mVp-p
	VOLTAGE ADJ. RANGE	4.5 ~ 5.5V	10.8 ~ 13.2V	13.5 ~ 16.5V	21.6 ~ 26.4V	43.2 ~ 52.8V
	VOLTAGE TOLERANCE	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	SETUP, RISE TIME	200ms , 100ms				
	HOLD UP TIME (Typ.)	30ms (full load)				
INPUT	VOLTAGE RANGE	85 ~ 264VDC 120~370VDC				
	FREQUENCY RANGE	47 ~ 63Hz				
	EFFICIENCY (Typ.)	75%	80%	82%	82%	82%
	AC CURRENT (Typ.)	0.25A/230V				
	INRUSH CURRENT (Typ.)	COLD START : 18A/115V 36A/230V				
	LEAKAGE CURRENT	< 0.5mA / 240VAC				
PROTECTION	OVERLOAD	115 ~ 135% rated output power				
		Protection type: Hiccup mode, recovers automatically after fault condition is removed				
	OVER VOLTAGE	5.75 ~ 6.75V	13.8 ~ 16.2V	17.25 ~ 20.25V	28.4 ~ 32.4V	55.2 ~ 64.8V
ENVIRONMENT	WORKING TEMP.	-10 ~ +60℃ (Refer to derating curve)				
	WORKING HUMIDITY	20 ~ 90% RH non-condensing				
	STORAGE TEMP	-20 ~ +85℃ , 20 ~ 95% RH				
	TEMP.COEFFICIENT	±0.03%/℃ (0 ~ 50℃)				
	VIBRATION	10 ~ 500Hz, 2G 10min/1cycle, 60min, each X Y Z axes				
	SAFETY	SAFETY STANDARDS	GB4943.1, EN 60950.1 APPROVED			
WITHSTAND VOLTAGE		I/P-O/P:1.5KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC				
ISOLATION RESISTANCE		I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC				
EMC EMISSION		EN61000-3-2:2014/EN61000-3-3:2013				
EMC EIMMUNITY		EN 55032:2015 / EN55035:2017/60950-1				
OTHERS	MTBF	≥ 720.6K hrs MIL-HDBK-217F(25℃)				
	DIMENSION	99*97*35mm (L*W*H)				
	PACKING	0.25Kg; 60pcs/18Kg/0.9CUFT				
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input,rated load and 25℃ of ambient temperature. 2. Ripple noise are measured at 20MHz of bandwidth by using a 12 twisted pair-wire with a 0.1uf and 47uf parallel capacitors 3. Tolerance includes set up tolerance, line regulation and load regulation. 4. Derating output is required under low input voltage, Please refer to the derating curve for details. 5. The power supply should be considered as a part of the components in the system, All EMC tests will test the test samples on a metal iron plate with a thickness of 1mm, a length of 360mm width 360mm.					

Mechanical Specification


Terminal Pin No. Assignment:

Pin No.	Assignment	Pin No.	Assignment
1	AC/L	4	DC OUTPUT -V
2	AC/N	5	DC OUTPUT +V
3	FG		

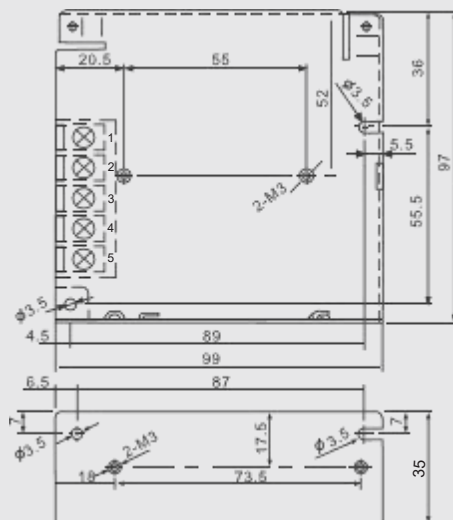


Unit:mm

Block Diagram

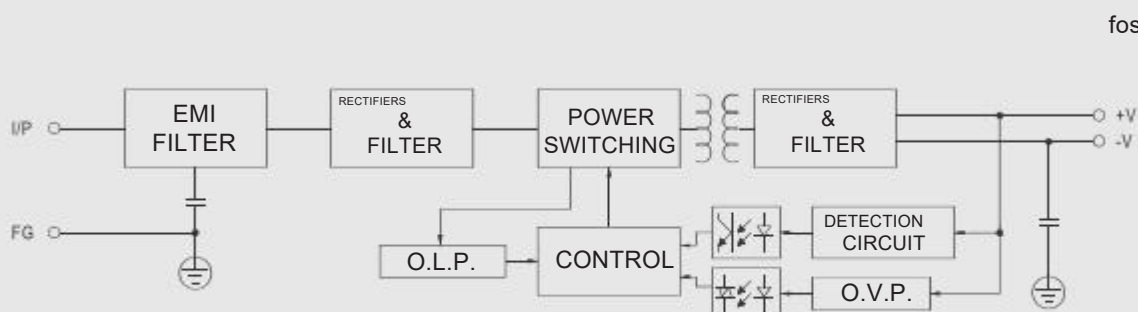

Derating Curve

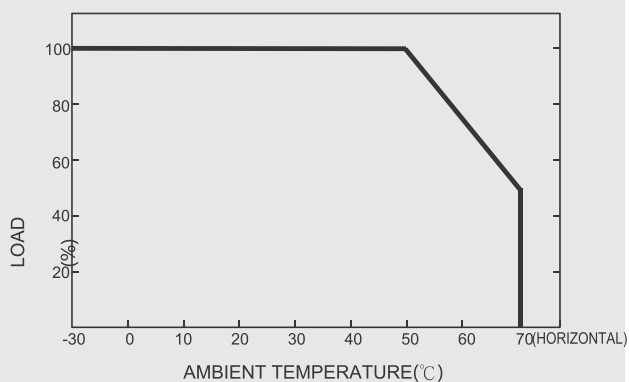

Static Characteristic

