

# Interface Terminal

## RXT-SDD10 ( 5 ~ 30VDC LOAD)



### Part Number Description

RXT - ① ② ③ ④


① Type	S : SSR
② Control Voltage	D : 4 - 32 VDC
③ Load Voltage	D : 5 - 30 VDC
④ Load Current	10 : 10A

### General Specification


▶ Input Ratings (ambient temperature 25°C)		
Rated Voltage	30 VDC	
Voltage Range	4 - 32VDC	
Control Voltage Levels	Pick-up Voltage	4 - 32VDC
	Drop-Out Voltage	Min. 4VDC
Input Current	10 ± 3mA	
Format		
Item	Low Voltage	
Rated Load Current	10A	
Rated Load Voltage	30VDC	
Load Voltage Range	5 - 30VDC	
Load Current	10A	
Peak Voltage	32VDC	
Insulation Resistance	Max. 100MΩ (500VDC)	
Dielectric Strength	2500VAC, 50/60Hz for 1minute	
Vibration Resistance	10 - 55 - 10Hz Peak Amplitude 0.35mm (Durable Amplitude 0.7mm)	
Shock Resistance	294m/s <sup>2</sup>	
Storage Temperature	-30 - +100°C (with no icing and condensation)	
Ambient Temperature	-30 - +80°C (with no icing and condensation)	
Ambient Humidity	45 - 85%RH	

### Dimension

unit : mm

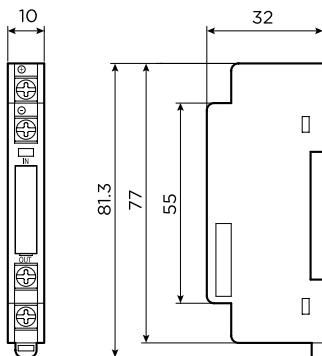

### Wirintg

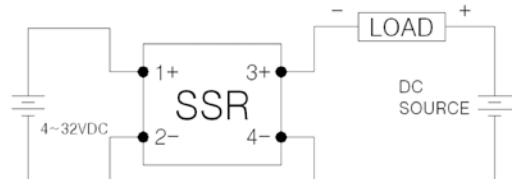

### Terminal

