


Product Features

- 1、Automatic shut off.
- 2. Three putting and two receiving devices.
- 3. Pneumatic pressurizing equipment.
- 4. Oil deposit with rotary joint-oil returndevice.
- 5. Emergency stop device.
- 6. Blanket from USA Dupont, with 100% Nomex.
- 7. Main body speed and inventer can be adjustable
- 8. Paper tension adjusting equipment.
- 9. Exhaust filter in the machine cabinet.
- 10. Indiviual adjustment on speed for paper winding device.

Power saving Easy Operation Convenient



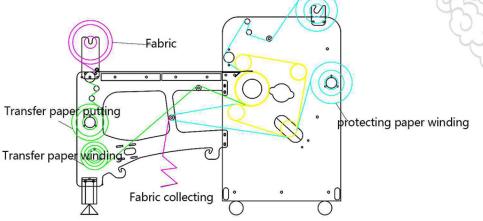

Protecting paper putting

7/24 ONLINE SERVICES One year warranty lifetime after-sales service

Model	HCM-F2012C	HCM-F2017C
Heating Media	Oil	
Voltage	Three Phase 220V/380V, Single 220V	
Heating Power	8KW	10KW
Diameter of oil drum	200mm/7.8"	
Printing speed	40-80M/H	
Max Temperature	240°C	
Transfer Width	1200mm/47.2"	1700mm/66.9"
Function of Roll-to-Roll	Yes	
Function of Piece-by-piece	Yes	
Function of Feeding Rollers	3	
Work Table	Yes,but no Glass	
Air Cylinder	Yes	
Machine Dimension	2.03*0.68*1.22m/80" *27" *48"	2.53*0.68*1.22m/100" *27" *48"



















