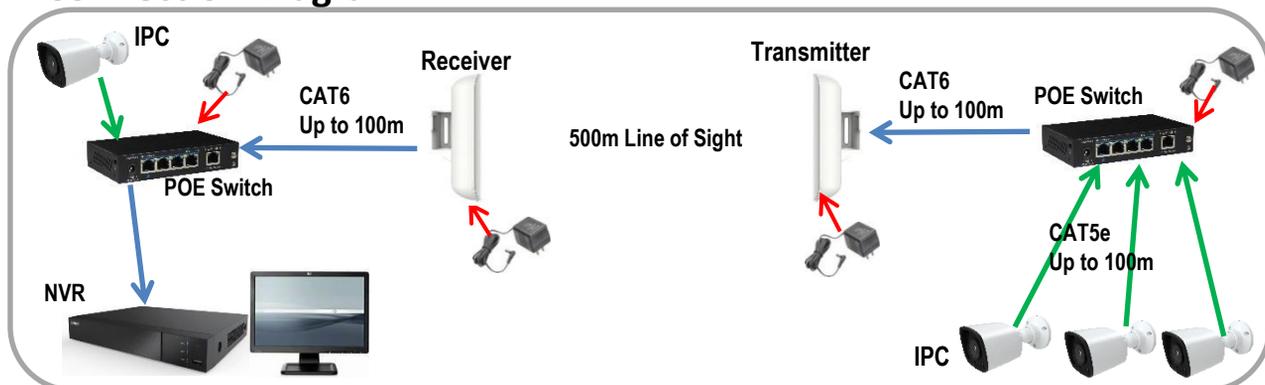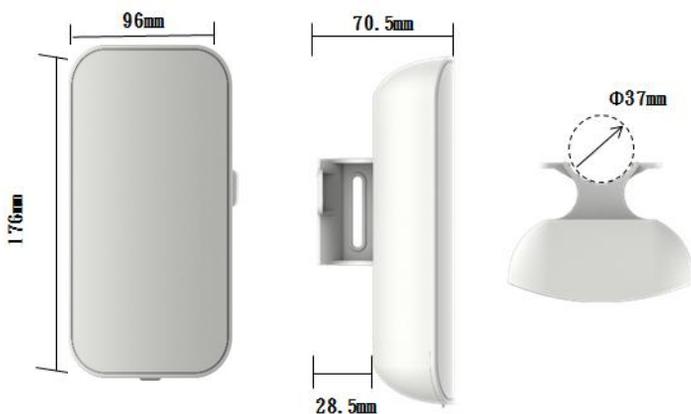## IPW0115 – 500m Network Extender

Features

- 500m Line of Sight
- 150Mbps, 5.8GHz
- 64M DDR RAM
- 10/100Mbps LAN port x1
- DIP Switch setting for easy pairing without use of PC
- Recommend for Lift, Warehouse, Store etc
- Active (Power Required) at both transmitter & receiver side
- LED indication for power & signal

Connection Diagram

IPC

Receiver

Transmitter

CAT6
Up to 100m

POE Switch

CAT6
Up to 100m

POE Switch

500m Line of Sight

CAT5e
Up to 100m

NVR

IPC

Dimension

96mm

70.5mm

Φ37mm

176mm

28.5mm

Specification

- IEEE802.11n, 11g, 11b, 802.3u
- Flash : 8MB
- IC : SiGe5012B
- DC12V, 1A
- Power Consumption <3W at both Transmitter & Receiver
- Operating Environment : -30º~65ºC / 0~95% Humidity
- ABS/PC Material with UV Protection
- Dimension & Weight : 170(H) x 96(W) x 70(D)mm, 300g (same for both Tx & Rx)

* Specification maybe changed without prior notice