



## Aluminium Foil Flexible Duct



**BDD (NKKFR 3 Layer)**

### Product Information


- Available in Silver & Gold Color.
- Use in bathroom, kitchen commercial, etc.
- Temperature range in  $-30^{\circ}\text{C}$  to  $150^{\circ}\text{C}$
- Fire retardant product Class 'O'
- Standard size for our product is 10m.



### Material Used

- Silver : Metallized PET 12micron+AL 7micron+PET 12micron
- Gold : MPET SILVER + ALU + MPET GOLD
- Steel wire 1.0mm-1.4mm
- Water base non-flammable adhesive modix

# NKK Flexible Duct Performance Chart

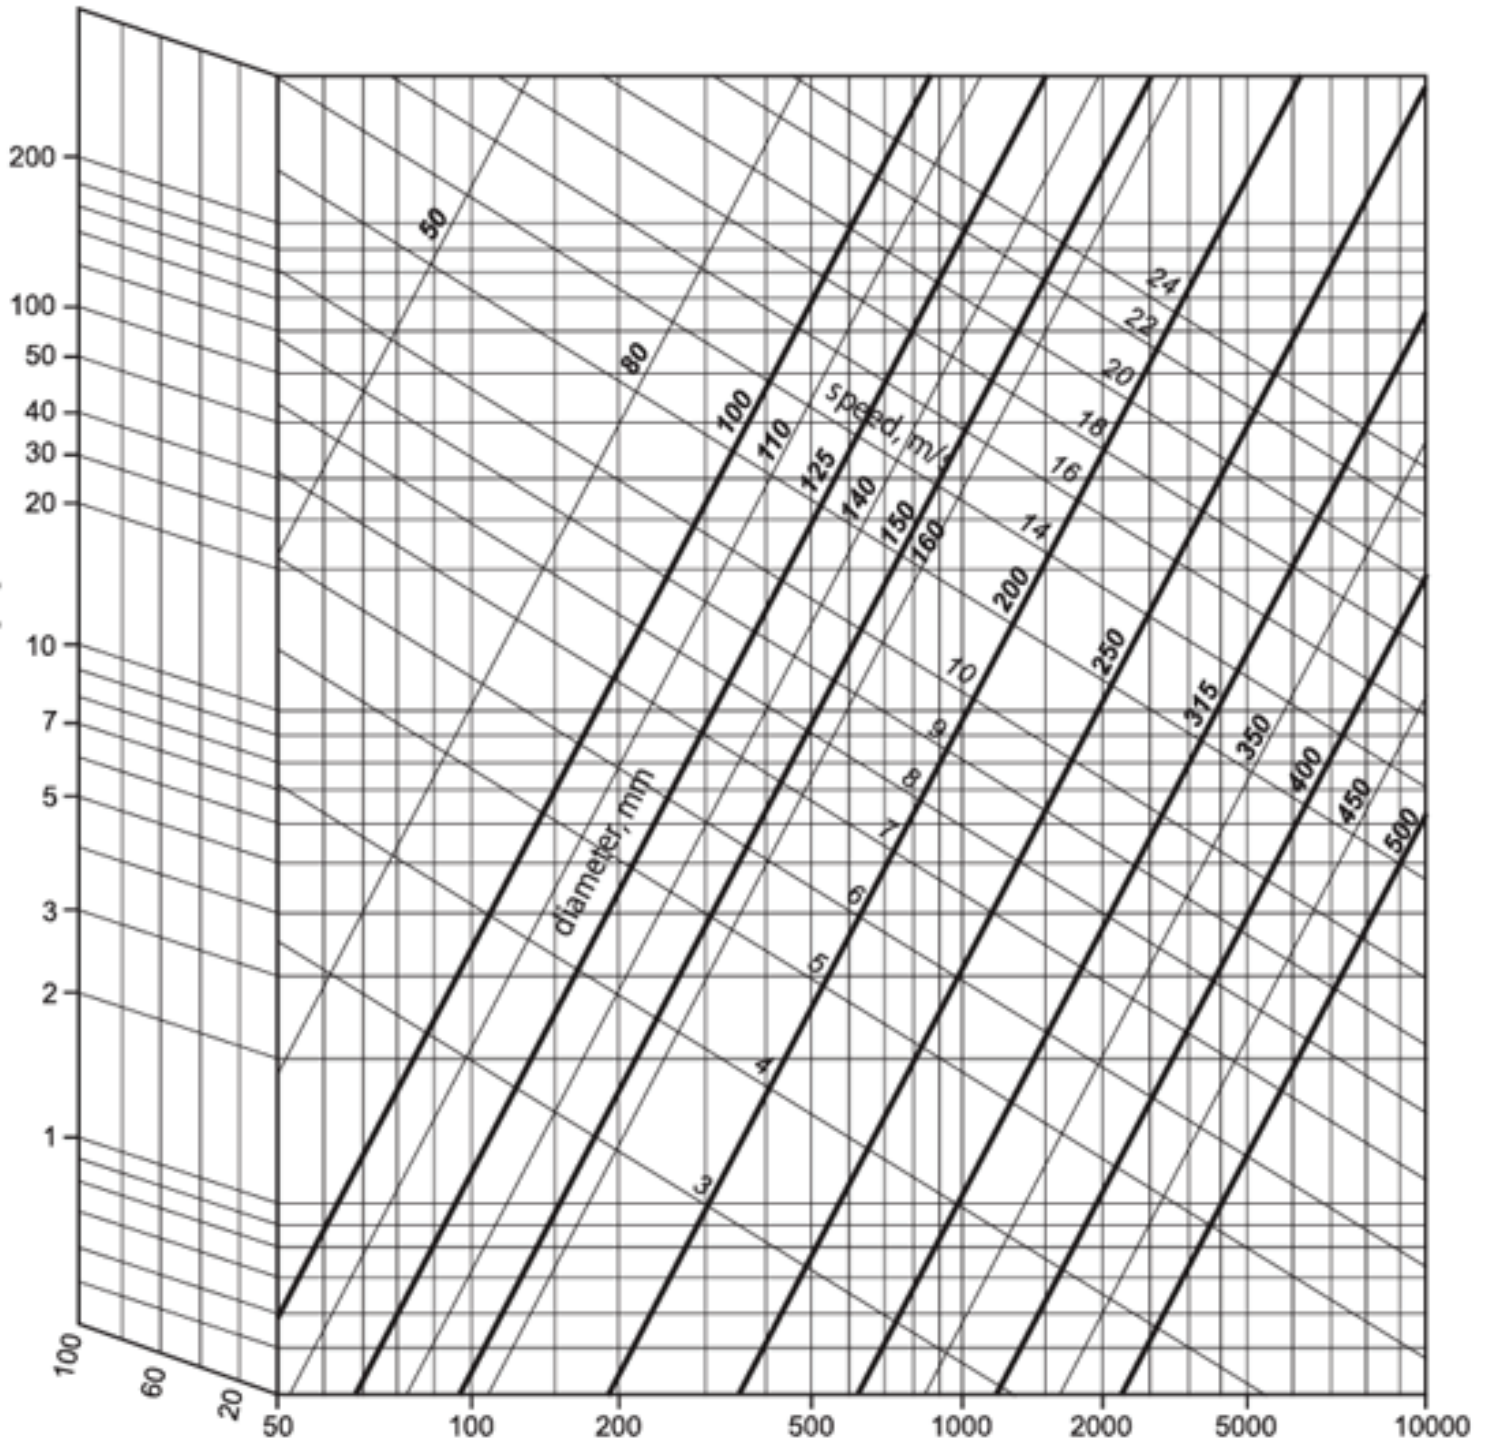

**SALES OFFICE :**

**NORTHERN NKK ENGINEERING SDN.BHD.**

49-A Medan Angsana 11500 Bandar Baru, Ayer Itam, Penang, Malaysia

[nkkengineering@hotmail.com](mailto:nkkengineering@hotmail.com)

+604-828 6992