

## Insulation Aluminium Foil Flexible Duct



### FD (2x2) With Insulation

### Product Information


- Use in HVAC system.
- Temperature range in -30°C to 120°C
- Non fire retardant product 2 Layer External 2 Layer Internal
- Standard size for our product is (R0.7 & R0.75) 10m and (R1.5) 5m.

### Material Used

- Internal : Metallized PET 12micron+PET 12micron
- External : Metallized PET 12micron+PET 12micron
- Water base non-flammable adhesive modiex
- Steel wire 1.0mm-1.4mm
- Insulation Glasswool R0.7/R0.75/R1.5



# NKK Flexible Duct Performance Chart

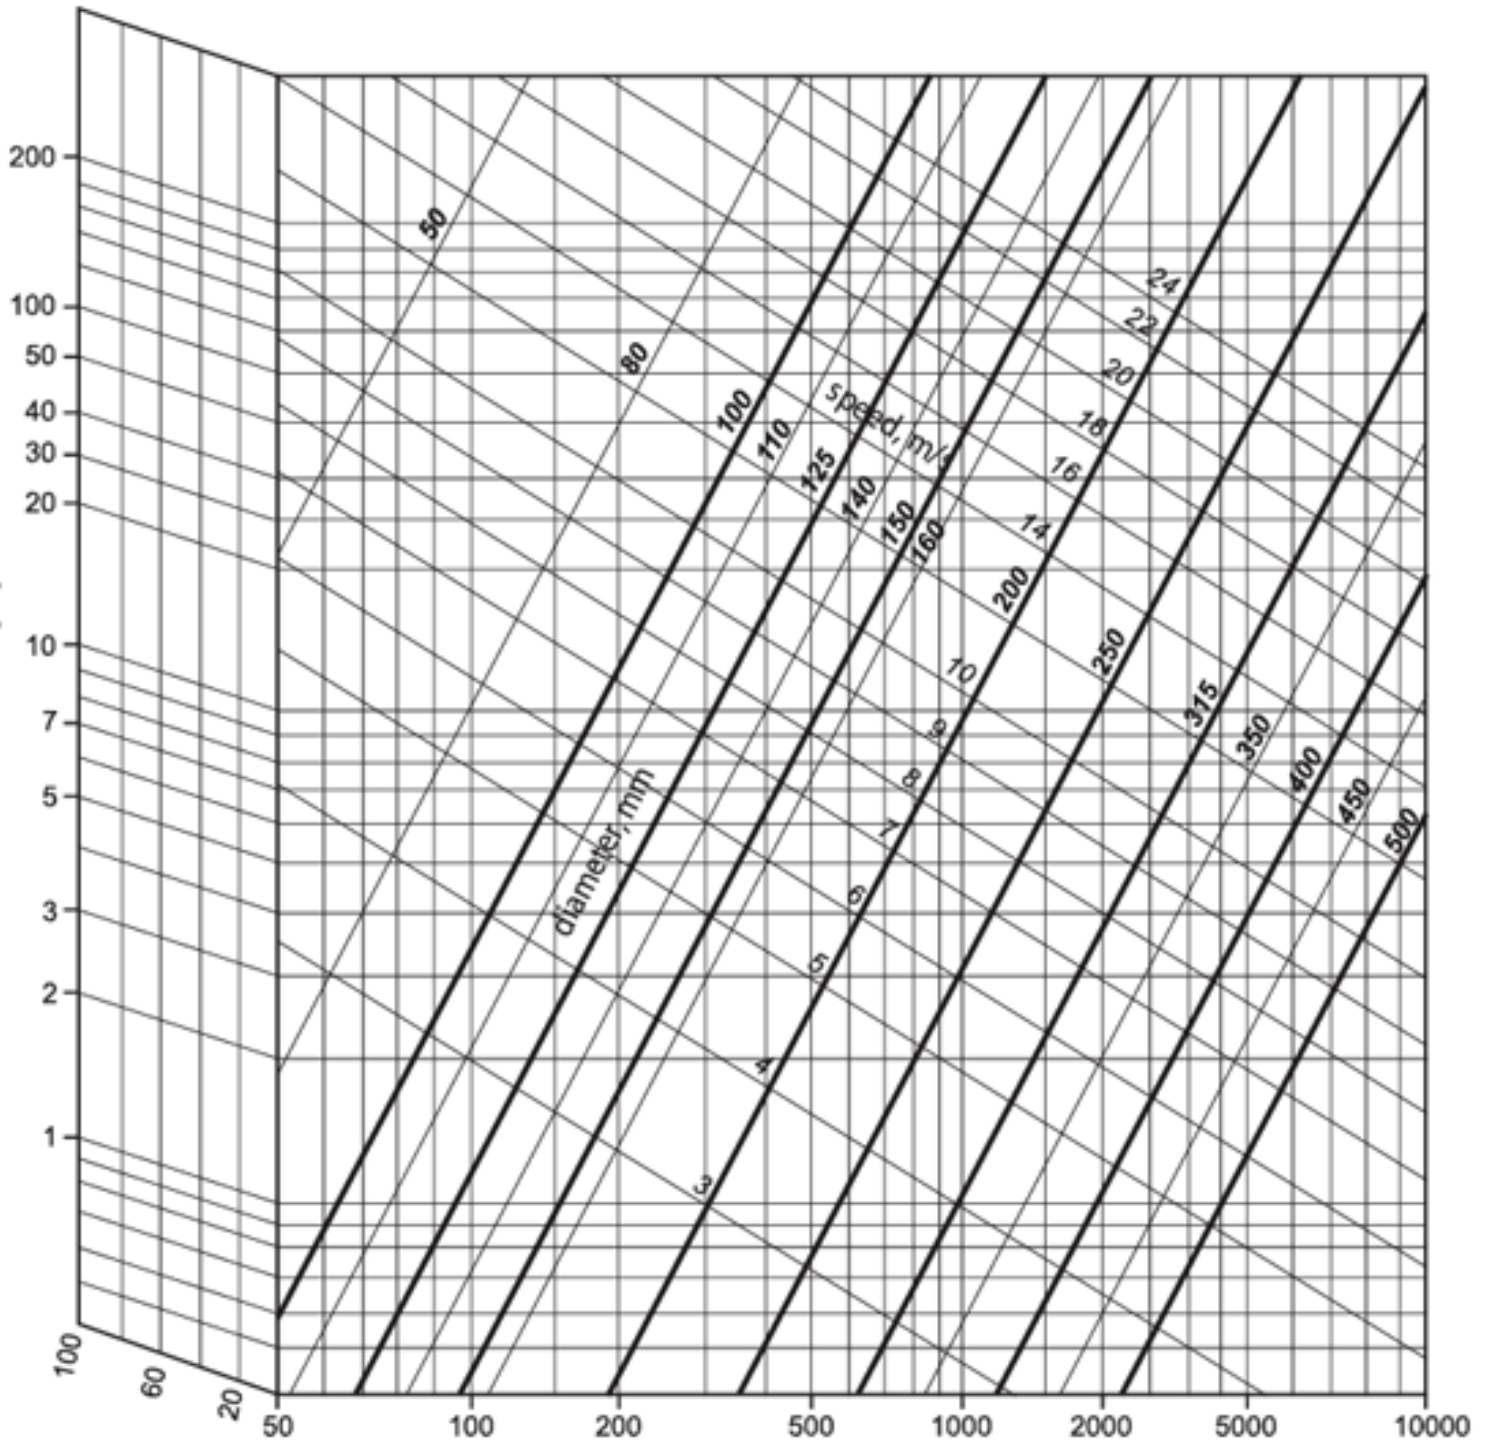

**SALES OFFICE :**

**NORTHERN NKK ENGINEERING SDN.BHD.**

49-A Medan Angsana 11500 Bandar Baru, Ayer Itam, Penang, Malaysia

[nkkengineering@hotmail.com](mailto:nkkengineering@hotmail.com)

+604-828 6992