

LED Canopy Light

150

LM/W



IP65



30°



60°






90°



120°

40x110°

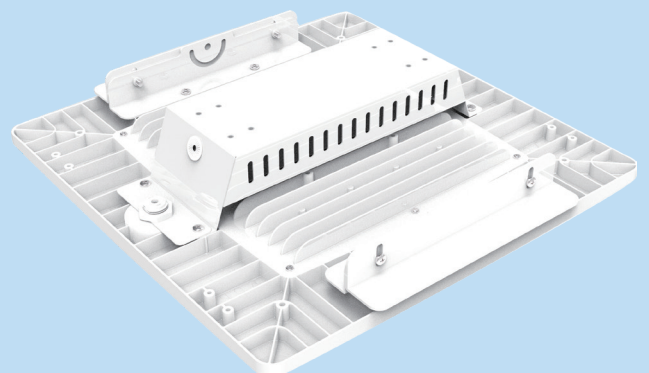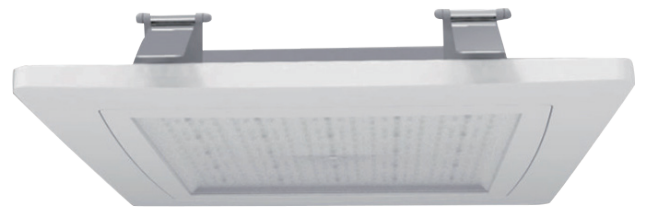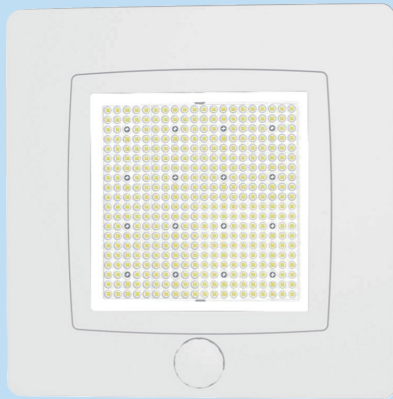



CE CB




Model NO.	EGE-CPL100-CL01		EGE-CPL150-CL01		EGE-CPL200-CL01	
Wattage		100W		150W		200W
Luminous Efficiency	150LM/W					
Lumen Flux		15,000LM		22,500LM		30,000LM
Beam Angle	30°/60°/90°/120°/40×110°					
Driver	SOSEN					
PF	>0.95					
Dimming	0-10V / DALI / PWM					
LED	Lumileds 3030					
LED Qty		192PCS		256PCS		384PCS
CCT	4000K / 5000K / 5700K / 6500K Optional					
CRI	>70(80Ra optional)					
Input	AC90-305V					
IP Rating	IP65					
IK Rating	IK08					
Life span	>50,000Hours					
Carton Size (mm)	L450mm x W450mm x H140mm					
QTY./CTN.		1pcs/CTN		1pcs/CTN		1pcs/CTN
Net Weight		5.1Kg		5.3Kg		5.5Kg
Gross Weight		6.0Kg		6.2Kg		6.4Kg
Certificate	CE,CB,SAA,C-tick,ROHS					

* Other specifications shall be confirmed with the sales representative.

Features:

- 80W to 200W capacity
- Integral LED Meanwell ELG series control gear
- Durable die-cast aluminium face profile
- Stylish white powder coat finish
- Plug and play sensor for option
- Five installation options, recessed, surface mount, large adaptor plate for retrofit applications, bracket mount and pipe mount

Distribution Curve:

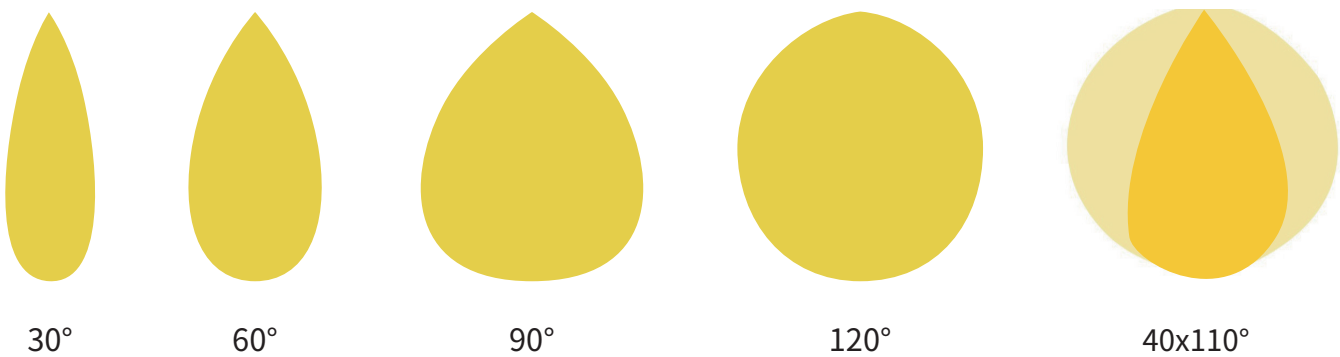

Technical Drawing :

