

NEW

Foot Operated Grease Pump

Model **FB-8**

Hands-free, waste free and mess free greasing!

YAMADA FB-8, a heavy duty, durable, foot operated grease pump that allows for hands-free, waste free and mess free operation.



686833 FB-8

Foot operated

- Just press the foot pedal for pumping. No need to bend down – minimize the fatigue
- Ideal for greasing to the agricultural machine, construction machine, etc. that have lots of grease fittings

Standard with Grease Lock Coupler

- No need to hold the nozzle during greasing
- Contribute to the safe working at tough work environment such as high place
- Leak free greasing reduces the waste and mess

Compact and durable

- 8L capacity, oval shaped durable bucket
- Convenient to carry around

Pressure return mechanism


- By hooking up the foot pedal, all the pressure in the hose is released into the bucket
- Easy, pressure free disconnection

Grease Lock Coupler (GLC-70)

By operating the lever, spring-actuated hardening steel 3-jaws connect and disconnect to/from grease fittings.



Pressure return mechanism

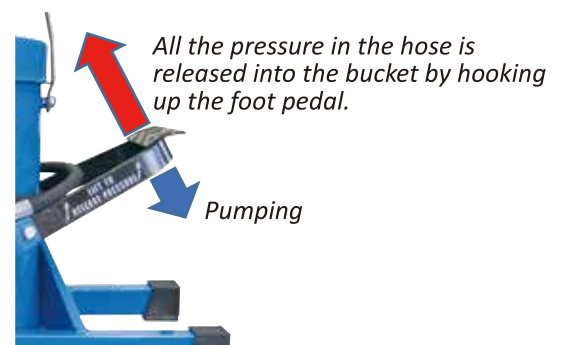

Specifications

Model No.	Model	Capacity	Discharge/stroke	Discharge press.	Hose	Dimensions (mm)	Weight
686833	FB-8	8L	2.7mL	69MPa	1/4"x2M	L450xW239xH452	8.6kg

NEW

Grease Lock Coupler Model *GLC-70*

Easy coupling – Leak proof greasing – Easy release!

YAMADA GLC-70, innovative lever action Grease Lock Coupler that solves greasing problems – simply and elegantly.




686830 GLC-70

- No mess or wasted grease – grease goes in the joint, not on the machine!
- No having to hold the coupler in place while greasing
- No struggling to keep the grease coupler aligned while operating the grease gun
- No ripping your knuckles trying to detach a stuck grease coupler
- Extended service life


How easy it is to use...

1. Activate trigger to engage – Easy coupling
2. Hands-free – Leak proof greasing
3. Activate trigger to disengage – Easy release

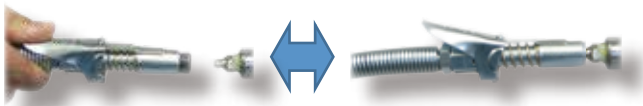

Works with all grease gun types...

- Hand grease guns
- Air operated grease guns
- Battery driven grease guns
- Hand & Foot operated grease pumps
- Air operated grease lubricators

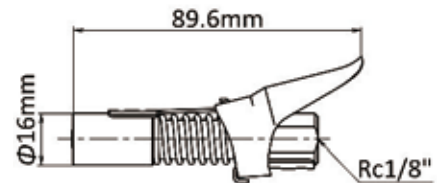

Specifications

Model No.	Model	Operating pressure	Connection	Dimensions (mm)	Weight
686830	GLC-70	69MPa	Rc1/8"	L89.6xW16xH39.4	100g

Local Distributor:

YAMADA CORPORATION

No.1-3, 1-Chome, Minami-Magome, Ohta-ku, Tokyo 143-8504, Japan
Phone : +81-(0)3-3777-0241 Fax : +81-(0)3-3777-0584
E-mail : intl@yamadacorp.co.jp URL : www.yamadacorp.co.jp/global

YAMADA (THAILAND) Co., Ltd.

41/79 Moo 6, (Bangna-Trad Road Km.16.5,) Bangcha-long, Bangplee , Sumutprakarn 10540, Thailand
Phone : +66-(0)2-130-0990 Fax : +66-(0)2-130-0993
E-mail : sales@yamada-th.com URL : www.yamadacorp.co.jp/global