




Lighting colors

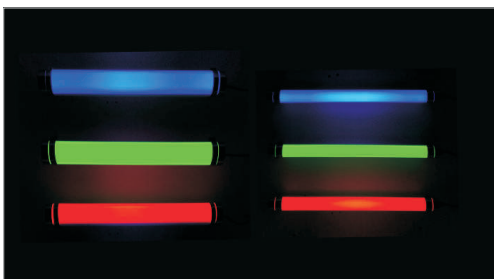

Description

1. Constructure: IP67;
2. Power Input: AC200-240V/AC100-240V 50/60Hz;
3. Outside Materials: Seamless PC pipe + Stainless Steel Caps;
4. PC Pipe: Transparent Cover and Milky Cover for options;
5. Stainless Steel Caps: SS201, SS304 and SS316 for options;
6. Inside Materials: 6063 Aluminum plate + LEDs;
7. Diameter: D45mm, D70mm, D80mm;
8. Length: 60cm, 90cm, 120cm, 150cm;
9. White Lighting: 3000K-6500K (full lighting wavelength);
10. Single Lighting: Single Red, Single Green, Single Blue;
11. Dimmable: Triac / 0-10V / 1-10V / Dali available;
12. Installation: Hanging or Surface mounted, with accessory.

Parameters

Light Diameter	D45mm		D70mm		D80mm		
Light Size	D45*600mm	D45*1200mm	D70*600mm	D70*1200mm	D80*600mm	D80*1200mm	
Watt	15W	30W	20W	40W	20W	40W	
Lighting efficiency	Milky Cover	1500lm	3000lm	2000lm	4000lm	2000lm	4000lm
	Transparent Cover	1800lm	3600lm	2400lm	4800lm	2400lm	4800lm
Lighting Angle	120°						
CRI	Ra>80/Ra>90 for options						
Color Temperature	3000 -6500K for options, full light wavelength;						
Voltage Input	AC200 -240V / 100 -240V, 50~60Hz						
Dimmable	Triac/0-10V/1-10V/Dali for options						