

**PC T8 TOP Ip, PC T8 TOP sl, 18 – 58 W**

PC TOP T8



**Product description**

- \_ CELMA Energy Efficiency Index A2
- \_ Nominal life-time up to 50,000 h (at  $t_a$  50 °C with a failure rate  $\leq$  0.2 % per 1,000 h)
- \_ Large temperature range (for values see table)
- \_ Constant luminous flux irrespective of fluctuations in mains voltage
- \_ Lamp preheating for min. 30,000 starts without replacement of lamps
- \_ Designed for THD < 10 %
- \_ For luminaires of protection class I and protection class II
- \_ Automatic start after replacement of defective lamps
- \_ Safety shutdown of defective lamps and at end of lamp life
- \_ Push terminal for rapid automatic or manual wiring
- \_ For emergency lighting systems as per EN 50172
- \_ 5-year guarantee

**Website**


<http://www.tridonic.com/22185228>



**PC T8 TOP Ip, PC T8 TOP sl, 18 – 58 W**

PC TOP T8

The complete data sheet for this product is available in the Downloads section.

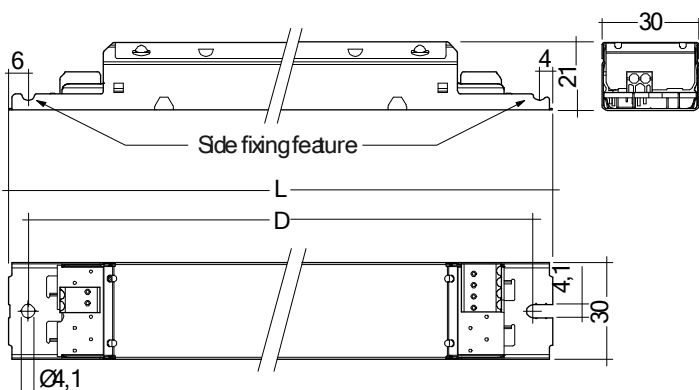

**Ordering data**

Type	Article number	Figure	Packaging, carton	Packaging, low volume	Packaging, high volume	Weight per pc.
<b>For luminaires with 3 or 4 lamps</b>						
PC 3/4x18 T8 TOP Ip	22185228	1	10 pc(s).	960 pc(s).	-	0.189 kg

**Technical data**

Mains voltage range	220 – 240 V
AC voltage range	198 – 264 V
DC voltage range	176 – 280 V (lamp start $\geq$ 198 V DC)
Mains frequency	0 / 50 / 60 Hz
Overvoltage protection	320 V AC, 1 h
Defined warm start	$\leq$ 1.5 s
Operating frequency	$\geq$ 39.5 kHz
Type of protection	IP20

**Approval marks**



**Standards**

EN 55015, EN 61347-2-4, EN 61347-2-3, EN 60929, EN 61000-3-2, EN 61547, Acc. to EN 50172, IEC 68-2-64 Fh, IEC 68-2-29 Eb, IEC 68-2-30

**Specific technical data**

Lamp wattage	Lamp type	Type	Article number	Dimensions L x W x H	Hole spacing D	Lamp power	Circuit power	EEI	Current at 50 Hz		$\lambda$ at 50 Hz		tc point max.	Ambient temperature ta	tc/ta for $\geq$ 50, 000 h
									220 V	240 V	220 V	240 V			
<b>For luminaires with 3 or 4 lamps</b>															
3 x 18 W	T26 (T8)	PC 3/4x18 T8 TOP Ip	22185228	280 x 30 x 21 mm	270 mm	50.4 W	57.8 W	A2	0.268 A	0.246 A	0.99	0.97	65 °C	-25 ... +55 °C	60/50 °C
4 x 18 W	T26 (T8)	PC 3/4x18 T8 TOP Ip	22185228	280 x 30 x 21 mm	270 mm	64.0 W	77.2 W	A2	0.355 A	0.325 A	0.99	0.97	70 °C	-25 ... +55 °C	65/50 °C