

proceq

equotip[®]

Equotip[®] 550 for Portable Leeb and Rockwell Hardness Testing




ASTM DIN EN ISO GB/T JB/T

Swiss Precision since 1954

equotip[®]


A New Breed

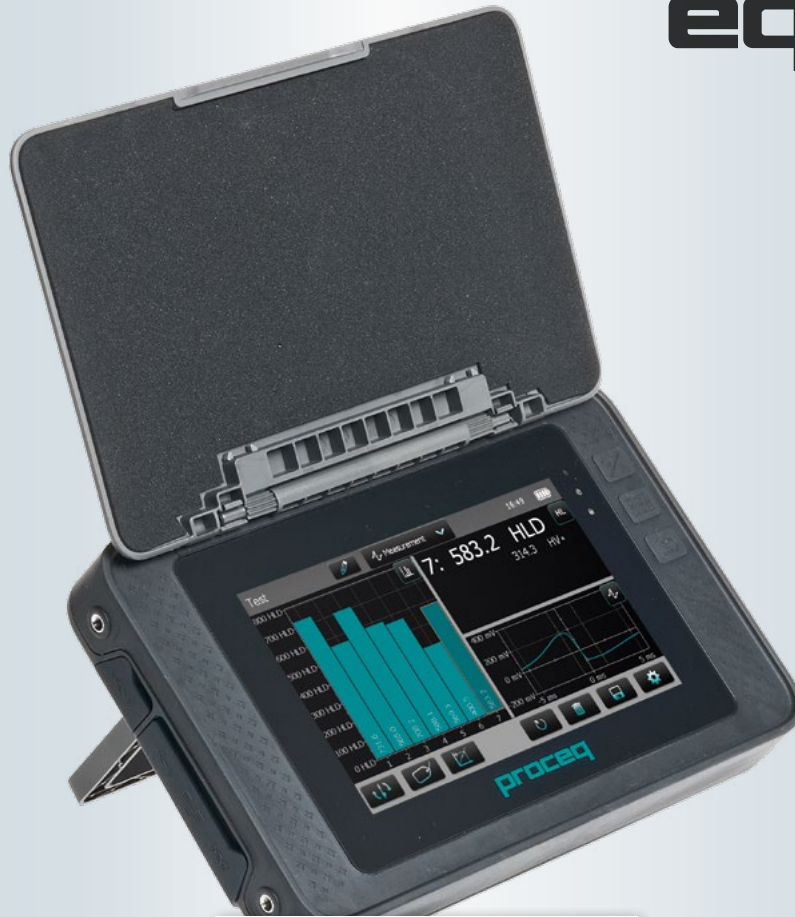

Equotip[®] 550


The All-In-One Hardness Testing Solution

Combining Leeb with Portable Rockwell and compatible with upcoming developments

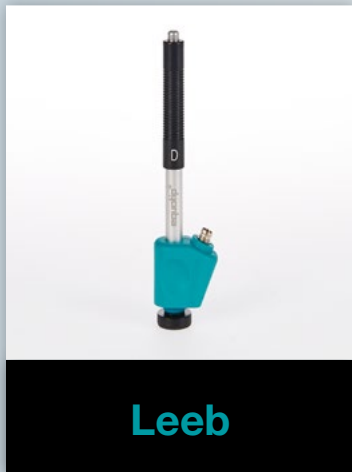


Leeb

> Find out more

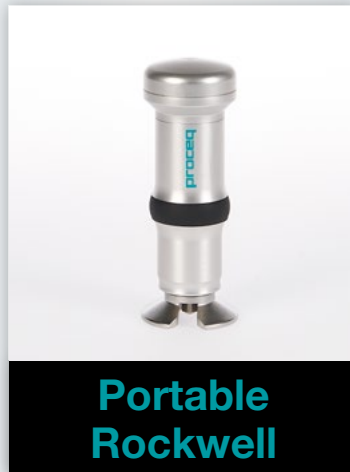

Portable Rockwell

> Find out more

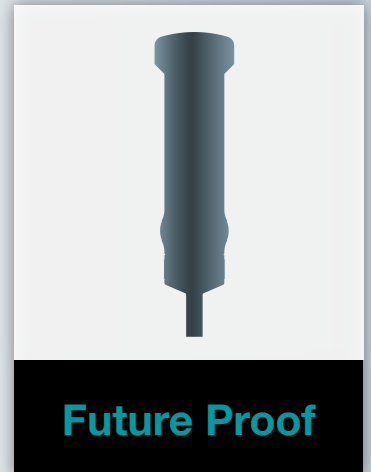

Future Proof

> Sign up for news

Equotip - the de facto industry standard since 1975

Introducing a New Generation Touchscreen Unit

Protected Hardware Connections
Probe connector, USB host, USB device and Ethernet

Elaborated User Interface
Designed by industry experts for smooth operation

Special Housing
Designed to be used on-site and in harsh environments (IP 54)

Touchscreen Features
For simplified and improved usability on high resolution display

Personalized Screens
Arrange the view according to your needs

Display	7" color display 800x480 pixels
Memory	Internal 8 GB flash memory
Regional Settings	Metric and Imperial units, multi-language and timezone supported
Power Input	12V +/-25% / 1.5A
Dimensions	250 x 162 x 62 mm
Weight	About 1525 g (incl. Battery)
Battery	Lithium Polymer, 3.6V, 14.0Ah

Battery Lifetime	> 8 h (in standard operating mode)
Humidity	< 95 % RH, non condensing
Operating Temperature	0 °C – 30 °C (Charging*, instrument on) 0 °C – 40 °C (Charging*, instrument off) -10 °C – 50 °C (Non-charging)
IP Classification	IP 54
Certification	CE

*charging equipment is for indoor use only (no IP classification)

Unique Features - Outstanding Advantages

Equotip 550 takes advantage of a new generation full color, dual processor Touchscreen Unit with enhanced software capabilities. The instrument offers a unique range of functions which ultimately help speed up on-site and laboratory inspections and analysis.



More Flexibility



Modular Concept

Flexible configuration for various industry applications with a wide range of probes and accessories



Custom Reports

Modular generator allows customized measurement reports

Increased Efficiency



Guiding Wizards

Predefined workflows to increase process reliability and to improve measurement precision



Interactive Guides

On-screen notifications to obtain the most relevant settings for your application

Improved Performance



Combined Method

Automatic on-site correlation of Leeb to Portable Rockwell true indentation hardness value



Conversion Curves

Create, edit and verify material conversion curves directly on the instrument

Enhanced Quality Assurance



Automatic Verification

Step by step verification in line with ISO 16859 and ASTM A956







Automation Option

Integration of NDT automation into quality management systems and automated testing environments

Covering Broad Hardness Testing Applications

Equotip 550 comes loaded with interactive wizards handpicked for specific industry applications in order to increase reliability and to assure precise measurements. A special new feature is the automatic combination of measurement methods which extends the scope of the Equotip 550 to a large area of use.

		Leeb	Rockwell	Combination	
				Automatic Correlation	Manual Verification
Oil & Gas					
	Weld, Base Material & HAZ			•	•
	Pressure Vessels		•		•
	Flanges	•	•	•	•
	Pipes		•		•
	Wellhead Equipment		•	•	•
Automotive					
	Engine Blocks	•			•
	Shafts	•	•		•
	Panels		•	•	•
	Gears	•			•
	Brake Systems	•			•
Aerospace					
	Turbine Blades		•	•	•
	Casings / Housings		•		•
	Panels		•		•
	Cast Objects	•			•
	Landing Gears	•	•		•
Manufacturing and Machinery					
	Roll Testing	•	•		•
	Coils		•		•
	Wedge Tightness	•			•
	Heat Treatment / Casting	•			•
	Wires		•		•

 > Application Guide



New Equotip® 550 Interactive Animation

Simulate a real measurement situation right now! Get an insight into the software features, unique user interface and innovative wizards!



[Click here to start the interactive Equotip Demo!](#)



Equotip® 550 Leeb

Standards

ASTM A956 / E140

ISO 16859
(publication upcoming)

DIN EN 50156

GB/T 17394

JB/T 9378

Guidelines

ASME CRTD-91

DGZfP Guideline MC 1

VDI / VDE Guideline 2616 Paper 1

Nordtest Technical Reports
99.12, 99.13, 99.36



*New Dimension
for Portable Dynamic
Hardness Testing*



Wide Measurement Range

Leeb impact devices are best suited for on-site testing of heavy, large or already installed parts.



Impact Devices & Accessories

Proceq offers a wide variety of impact devices along with support rings to serve most hardness testing requirements.



Broad Hardness Scales Coverage

The measurements are automatically converted to all common hardness scales (HV, HB, HRC, HRB, HRA, HS, Rm) as required.



Test Blocks Portfolio


Extensive range of precise hardness test blocks available for each impact device with different hardness levels for regular verification.

 > [Equotip Test Blocks Flyer](#)





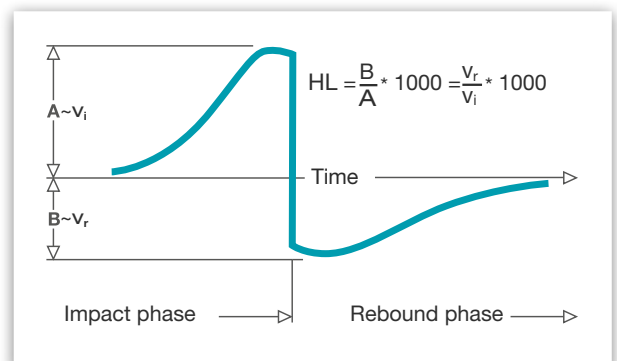

The Leeb Measuring Principle

Leeb hardness principle is based on the dynamic (rebound) method. An impact body with a hard metal test tip is propelled by spring force against the surface of the test piece. Surface deformation takes place when the impact body hits the test surface, which results in loss of kinetic energy. This energy loss is detected by a comparison of velocities v_i and v_r when the impact body is at a precise distance from the surface for both the impact and rebound phase of the test, respectively.

Velocities are measured using a permanent magnet in the impact body that generates an induction voltage in the coil which is precisely positioned in the impact device. The detected voltage is proportional to the velocity of the impact body. Signal processing is then providing the hardness reading.



Equotip® 550 Leeb Impact Devices

									
			D/DC	DL	S	E	G	C	
Impact energy			11 Nmm	11 Nmm	11 Nmm	11 Nmm	90 Nmm	3 Nmm	
Indenter			Tungsten carbide 3 mm	Tungsten carbide 2.8 mm	Ceramics 3 mm	Polycrystalline diamond 3 mm	Tungsten carbide 5 mm	Tungsten carbide 3 mm	
Scope			Most commonly used probe. For the majority of applications.	Narrow indenter (probe) tip for measurement on hard reach areas or spaces with limited access.	For measurements in extreme hardness ranges. Tool steels with a high carbide content.	For measurements in extreme hardness ranges. Tool steels with high carbide content.	Large and heavy components, e.g. casts and forged parts.	For surface hardened components, coatings, thin or impact-sensitive parts.	
Test blocks			<500 HLD ~600 HLD ~775 HLD	<710 HLDL ~780 HLDL ~890 HLDL	<815 HLS ~875 HLS	~740 HLE ~810 HLE	~450 HLG ~570 HLG	~565 HLC ~665 HLC ~835 HLC	
Measuring Range	Steel and cast steel	Vickers Brinell Rockwell Shore Rm N/mm ²	HV HB HRB HRC HRA HS σ1 σ2 σ3	81-955 81-654 38-100 20-68 30-99 275-2194 616-1480 449-847	80-950 81-646 37-100 21-68 31-97 275-2297 614-1485 449-849	101-964 101-640 22-70 61-88 28-104 340-2194 615-1480 450-846	84-1211 83-686 20-72 61-88 29-103 283-2195 616-1479 448-849	90-646 48-100 305-2194 618-1478 450-847	81-1012 81-694 20-70 30-102 275-2194 615-1479 450-846
	Cold work tool steel	Vickers Rockwell	HV HRC	80-900 21-67	80-905 21-67	104-924 22-68	82-1009 23-70	*	98-942 20-67
	Stainless steel	Vickers Brinell Rockwell	HV HB HRB HRC	85-802 85-655 46-102 20-62	*	119-934 105-656 70-104 21-64	88-668 87-661 49-102 20-64	*	*
	Cast iron lamellar graphite GG	Brinell Vickers Rockwell	HB HV HRC	90-664 90-698 21-59	*	*	*	92-326	*
	Cast iron, nodular graphite GGG	Brinell Vickers Rockwell	HB HV HRC	95-686 96-724 21-60	*	*	*	127-364 19-37	*
	Cast aluminium alloys	Brinell Vickers Rockwell	HB HV HRB	19-164 22-193 24-85	20-187 21-191	20-184 22-196	23-176 22-198	19-168 24-86	21-167 23-85
	Copper/zinc alloys (brass)	Brinell Rockwell	HB HRB	40-173 14-95	*	*	*	*	*
	CuAl/CuSn-alloys (bronze)	Brinell	HB	60-290	*	*	*	*	*
	Wrought copper alloys, low alloyed	Brinell	HB	45-315	*	*	*	*	*
Test Piece Requirements	Surface preparation	Roughness grade class ISO 1302	N7				N9	N5	
		Max. roughness depth R _t (µm / µinch)	10 / 400				30 / 1200	2.5 / 100	
		Average roughness R _a (µm / µinch)	2 / 80				7 / 275	0.4 / 16	
	Minimum sample mass	Of compact shape (kg / lbs)	5 / 11				15 / 33	1.5 / 3.3	
		On solid support (kg / lbs)	2 / 4.5				5 / 11	0.5 / 1.1	
		Coupled on plate (kg / lbs)	0.05 / 0.2				0.5 / 1.1	0.02 / 0.045	
	Minimum sample thickness	Uncoupled (mm / inch)	25 / 0.98				70 / 2.73	15 / 0.59	
		Coupled (mm / inch)	3 / 0.12				10 / 0.4	1 / 0.04	
		Surface layer thickness (mm / inch)	0.8 / 0.03					0.2 / 0.008	
	Indentation size on test surface	With 300 HV, 30 HRC	Diameter (mm / inch)	0.54 / 0.021				1.03 / 0.04	0.38 / 0.015
Depth (µm / µinch)			24 / 960				53 / 2120	12 / 480	
With 600 HV, 55 HRC		Diameter (mm / inch)	0.45 / 0.017				0.9 / 0.035	0.32 / 0.012	
		Depth (µm / µinch)	17 / 680				41 / 1640	8 / 2560	
With 800 HV, 63 HRC		Diameter (mm / inch)	0.35 / 0.013					0.30 / 0.011	
		Depth (µm / µinch)	10 / 400					7 / 280	

*Custom conversion curve / correlation

Equotip® 550 Portable Rockwell

Standards

DIN EN 50157

Guidelines

DGZfP Guideline MC 1

VDI / VDE Guideline 2616 Paper 1



*World-Class
Portable Static
Hardness Testing*



**Advanced algorithm option
for faster measurement**



**Probe can be connected
directly to PC**




Specially For Thin Parts

Particularly suited for scratch-sensitive and polished parts or on thin parts, profiles and pipes with a wall thickness that is below 2 mm (0.08").



Suits Various Sample Geometries

Unique measuring clamp and support feet are available for the probe allowing tests to be carried out on various geometries.



Broad Hardness Scales Coverage

Measurements in HRC and HV with automatic integrated conversions to HB, HRA, HRB and many more common scales in compliance to ASTM E140 and ISO 18265.




For Any Environment


The Equotip 550 Portable Rockwell can be utilized for on-site, factory and lab environment with almost no limitation.




The Rockwell Measuring Principle

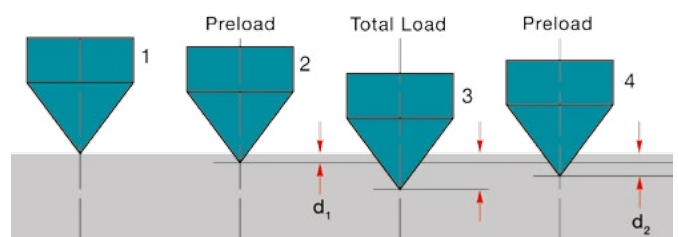The test principle of the Equotip Portable Rockwell follows the traditional Rockwell static test method. During measurements with the Equotip Portable Rockwell Probe, a diamond indenter is forced into the test piece using a precisely controlled force. The indentation depth of the diamond is continuously measured while a load is applied and released. From the indentation depths d_1 and d_2 recorded at two defined loads, the difference is calculated: $\Delta = d_2 - d_1$. This is traditionally referred to as plastic deformation.








Equotip® 550 Portable Rockwell Probe and Accessories

	Measuring range	0-100 µm; 19-70 HRC; 35-1'000 HV
	Resolution	0.1 µm; 0.1 HRC; 1 HV
	Measuring accuracy	± 0.8 µm; ~ ± 1.0 HRC over entire range
	Maximum test hardness	70 HRC; approx. 1'000 HV
	Test loads	Preload 10 N / Total Load 50 N
	Diamond indenter	Angle 100.0° ± 0.5°, diameter of flat area of 60 µm ± 0.5 µm

		
Round standard foot (magnetic) Ideal for flat parts, and test locations more than 10 mm from an edge.	Tripod foot Designed for tests that require accurate positioning (welds, heat-affected zones).	Special feet RZ 18-70 and 70-∞ Designed for curved test pieces such as cylindrical parts, tubes, pipes.

The Portable Rockwell Measuring Clamp

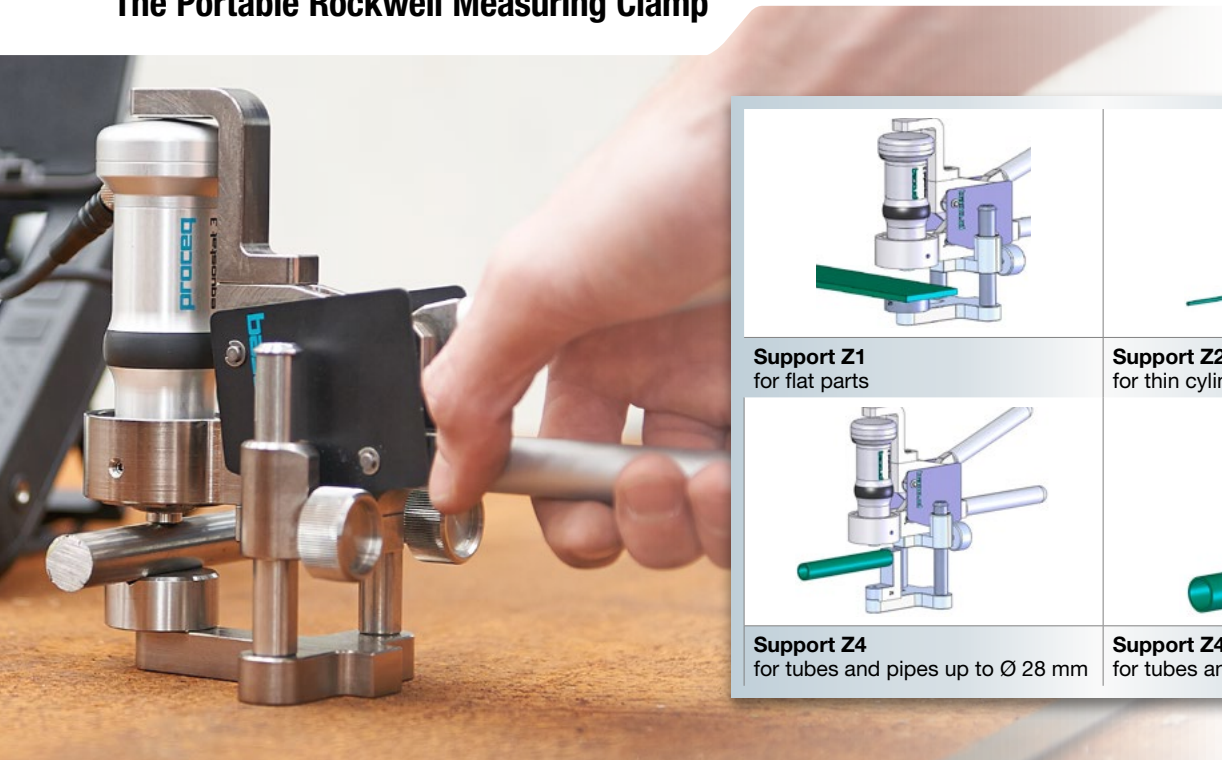

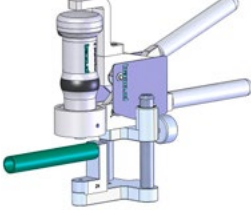	
Support Z1 for flat parts	Support Z2 for thin cylindrical parts, wires, bolts
	
Support Z4 for tubes and pipes up to Ø 28 mm	Support Z4+28 for tubes and pipes over Ø 28 mm

Equotip – one of the most trusted technologies in the NDT market

The Equotip from Proceq has higher data reliability than other hardness testers. It also has far less measurement errors and mechanical malfunctions.



Young-Hwan Lee, Manager of Casting Forging
Hyundai Motor Company

It's the ease of use of the equipment that's the outstanding feature for us.



Mark Boyce
Technical Manager
Weir Group

Only the highest product quality enables Steinhoff to secure a leading position in the international metal rolling industry. Proceq's Equotip is an integral part of our quality assurance system.

Martin Trzensiok, Quality Management
Steinhoff GmbH & Cie. OHG



The portable hardness tester Equotip allows rapid and trouble-free hardness testing of large moulds. This enables us to maintain the quality of the forging equipment at a very high level, permitting cooperation with companies in the maritime and aviation industries.

Dr. Ing. Ewa Figna-Zientz
Director
Minec



Martin Trzensiok, Quality Management
Steinhoff GmbH & Cie. OHG

Regardless of the impact direction it's always possible to perform the test which is a valuable feature for us.

Moon-Su Lee, Assistant Manager
Posco Specialty Steel Corporation



We have been using the Equotip hardness tester for measuring the hardness of incoming dies from various suppliers globally. The biggest advantages are the easy handling and the simple method of operation.

Mansoor Ali Khan Mohammed
Asst. Division Head Laboratory
Gulf Extrusions Co.LLC



I needed a hardness tester that is easy to use and portable. Proceq's Equotip fits my needs. It is very simple to navigate and obtain results. The spring loaded probe is very convenient and makes my job easy.

Thomas Davis, NDE Technician/CWI
TÜV Rheinland – Industrial Solutions



With Equotip I achieve fast and accurate results, mainly for heavy parts. No bench top tester necessary anymore.

Debora Goes, Quality Control
Eletrotêpera Tratamento
Térmico LTDA



We have been using the Equotip hardness testers for more than 25 years. At times we have tried other hardness testers however when it comes to reliability and particularly for checking hardness above 60 HRC no other portable device comes close to Equotip.



Pramod Jain
Controller, QA
AIA Engineering Ltd.

We have been successfully using Proceq's Equotip for years in the quality testing of our high-performance materials for the international aerospace, automotive and construction industries.

Jonas Loschelder, Purchasing
Otto Fuchs KG



Bestsellers

Prepacked Units

All units include: Equotip Touchscreen incl. Battery, Power Supply, USB Cable, Surface Roughness Comparator Plate, DVD with Software, Documentation, Carrying Strap and Carrying Case

Equotip® 550



356 10 001

For flexible probe configuration and for existing owners of Equotip and Equostat 3 probes

Equotip® 550 Leeb D



356 10 002
Additionally includes Equotip Leeb Impact Device D, Impact Device Cable, Test Block ~775 HLD / ~56 HRC, Coupling Paste, Cleaning Brush

Equotip® 550 Leeb G



356 10 003
Additionally includes Equotip Leeb Impact Device G, Impact Device Cable, Test Block ~570 HLG / ~340 HB, Coupling Paste, Cleaning Brush

Equotip® 550 Portable Rockwell



356 10 004
Additionally includes Equotip Portable Rockwell Probe 50 N, Probe Cable, Test Block ~62 HRC



Impact Devices & Probes

Equotip Leeb Impact Devices

356 00 500	Equotip Leeb Impact Device C
356 00 100	Equotip Leeb Impact Device D
356 00 110	Equotip Leeb Impact Device DC
356 00 120	Equotip Leeb Impact Device DL
356 00 400	Equotip Leeb Impact Device E
356 00 300	Equotip Leeb Impact Device G
356 00 200	Equotip Leeb Impact Device S

Equotip Portable Rockwell Probe

356 00 600	Equotip Portable Rockwell Probe 50 N
------------	--------------------------------------

Accessories

Equotip Leeb Accessoires

353 03 000	Set of Support Rings
356 00 080	Equotip Impact Device Cable 1.5 m (5 ft)
356 00 082	Equotip Impact Device Cable 5 m (15 ft)

Equotip Portable Rockwell Accessoires

354 01 200	Equotip Portable Rockwell Measuring Clamp
354 01 130	Equotip Portable Rockwell Tripod
354 01 250	Equotip Portable Rockwell Special Foot RZ 18 - 70
354 01 253	Equotip Portable Rockwell Special Foot RZ 70 - ∞



Test Blocks

Equotip Leeb Test Blocks Calibrated by Proceq

357 11 500	Equotip Test Block C, ~565 HLC / <220 HB
357 12 500	Equotip Test Block C, ~665 HLC / ~325 HB
357 13 500	Equotip Test Block C, ~835 HLC / ~56 HRC
357 11 100	Equotip Test Block D/DC, <500 HLD / <220 HB
357 12 100	Equotip Test Block D/DC, ~600 HLD / ~325 HB
357 13 100	Equotip Test Block D/DC, ~775 HLD / ~56 HRC
357 13 105	Equotip Test Block D/DC, ~775 HLD, one side
357 11 120	Equotip Test Block DL, <710 HLDL / <220 HB
357 12 120	Equotip Test Block DL, ~780 HLDL / ~325 HB
357 13 120	Equotip Test Block DL, ~890 HLDL / ~56 HRC
357 13 400	Equotip Test Block E, ~740 HLE / ~56 HRC
357 14 400	Equotip Test Block E, ~810 HLE / ~63 HRC
357 31 300	Equotip Test Block G, <450 HLG / <200 HB
357 32 300	Equotip Test Block G, ~570 HLG / ~340 HB
357 13 200	Equotip Test Block S, ~815 HLS / ~56 HRC
357 14 200	Equotip Test Block S, ~875 HLS / ~63 HRC

Equotip Portable Rockwell Test Blocks

357 41 100	Equotip Portable Rockwell Test Block ~20 HRC, ISO 6508-3 HRC Calibration
357 42 100	Equotip Portable Rockwell Test Block ~45 HRC, ISO 6508-3 HRC Calibration
357 44 100	Equotip Portable Rockwell Test Block ~62 HRC, ISO 6508-3 HRC Calibration

Additional Test Block Calibrations

Factory Calibrations by Proceq

357 10 109	Additional Calibration HLD / HLDC
357 10 129	Additional Calibration HLDL
357 10 209	Additional Calibration HLS
357 10 409	Additional Calibration HLE
357 10 509	Additional Calibration HLC
357 10 309	Additional Calibration HLG

By Accredited Institutes

357 90 909	Additional Calibration HL (DIN 50156-3)
357 90 919	Additional Calibration HB (ISO 6506-3)
357 90 929	Additional Calibration HV (ISO 6507-3)
357 90 939	Additional Calibration HR (ISO 6508-3)

By Accredited Institutes

357 90 918	Additional Calibration HB (ISO 6506-3)
357 90 928	Additional Calibration HV (ISO 6507-3)

Service and Support

Proceq is committed to providing the best support and service available in the industry through the Proceq certified service centers worldwide. This results in a complete support for Equotip by means of our global service and support facilities.

Subject to change without notice. All information contained in this documentation is presented in good faith and believed to be correct. Proceq SA makes no warranties and excludes all liability as to the completeness and/or accuracy of the information. For the use and application of any product manufactured and/or sold by Proceq SA explicit reference is made to the particular applicable operating instructions.

Warranty Information

Each instrument is backed by the standard Proceq warranty and extended warranty options.

- » Electronic portion of the instrument: 24 months
- » Mechanical portion of the instrument: 6 months

A Story of Success - Over more than 60 Years

60 YEARS OF INNOVATION
proceq

Market Leader

Proceq SA was established in 1954 in Zurich, Switzerland and is a leading manufacturer of high precision portable instruments for a wide range of applications such as concrete, metal, rock, paper and composites. > [Find out more on the Proceq history](#)

INVENTOR OF LEEB

INDUSTRY STANDARD

NON-DESTRUCTIVE

equotip[®]

INVENTED IN 1975

PORTABLE

LEEBS & ROCKWELL

SWISS MADE



Worldwide Local Support

Our team of dedicated experts are available to advise you on our instruments and their applications. In addition you may take further benefits from our instructional videos, evaluation tools, online webinars and of course our live seminars globally.



Swiss Made

Proceq instruments are developed, designed and manufactured in Switzerland. Since 1994, Proceq has been certified to the ISO 9001 standards that guarantee highest quality of processes, products and services.



Experience

Proceq has been a proud innovator in the field of portable non-destructive testing, developing a number of brands that have conquered the inspection industry for decades, such as the Equotip[®], Schmidt[®] Hammers, Pundit[®], Profometer[®] and Carboteq[®].

Click to find out more about the Proceq subsidiaries



○ Headquarters
● Subsidiary

Buy online



- > E-Shop Asia
- > E-Shop Europe
- > E-Shop USA

Sales & Support



Asia	+65 82 33 78 01
China	+86 21 63 17 74 79
Europe	+41 43 35 53 80 0
Middle East	+97 16 55 78 50 5
Russia	+78 12 44 83 50 0
South America	+55 11 30 83 38 89
UK	+44 12 34 83 45 13
USA	+17 24 51 20 33 0

Documents



- > Application Guide
- > Application Questionnaire
- > Operating Instructions
- > Test Blocks Flyer
- > Technical Guide

Seminars



Globally organized seminars to help you learn more about our products and applications. Contact your local representative for further information.

Proceq SA

Ringstrasse 2 - 8603 Schwerzenbach - Switzerland
 Phone: +41 (0)43 355 38 00
 Fax: +41 (0)43 355 38 12
 info@proceq.com
 www.proceq.com

