



CATEGORY 3 SOLUTIONS

APPLICATION


- ❖ ALL-LINK 2-Pair Twisted Category 3 copper cables lay the solid platform needed for a reliable 10/100 Mb.

PRODUCT FACTS

- ❖ INDOOR USE
- ❖ TWISTED PAIR

PRODUCT CODE

- ❖ TEL-ALL-050-250-BC

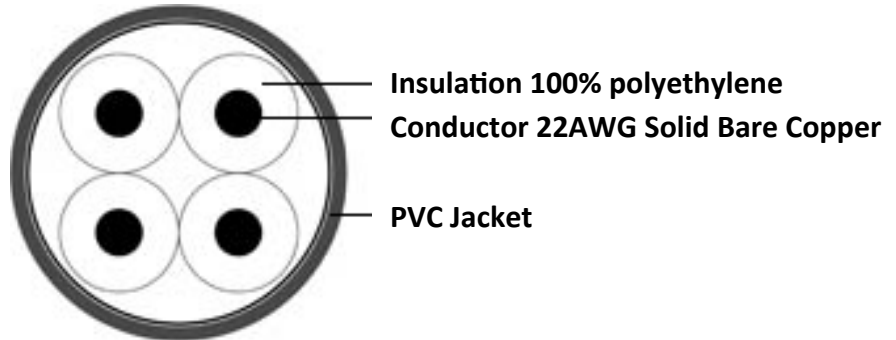

TECHNICAL DATA

DESCRIPTION	SPECIFICATION
<i>Physical Characteristics</i>	
Conductor Material	22 AWG solid bare copper x 2pair
Conductor Size	0.50 ± 0.01m
Insulation Material	100% Polyethylene
Insulation Color	White Green / White Orange
Jacket Material	PVC
Jacket Color	Grey
Thickness (Nom)	0.75 ± 0.05
Diameter (App)	0.15 ± 0.05
<i>Electrical Characteristics</i>	
Conductor Resistance (Max)	64 Ohm/ km
Conductor Resistance (Max Average)	58 Ohm/ km
Insulation Resistance (Min)	300 Mega Ohms/ km
Mutual Capacitance (Max)	90 pF/ k
Capacitance (Max)	275 pF/ k
Maximum Operating Temperature (°C)	70