

APPLICATION

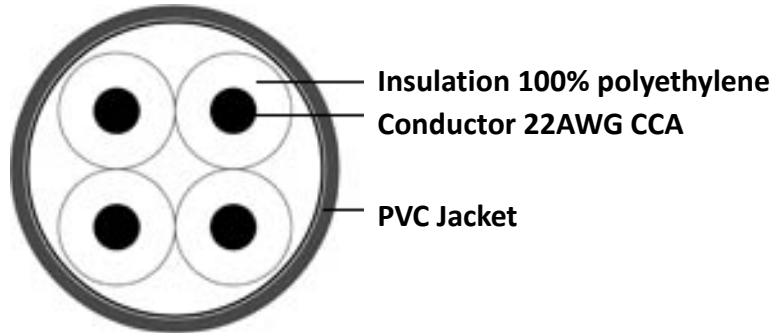
- ❖ XPRO 2-Pair Category 3 copper cables lay the solid platform needed for a reliable 10/100 Mb.

PRODUCT FACTS

- ❖ INDOOR USE
- ❖ TWISTED PAIR

PRODUCT CODE

- ❖ TEL-XPRO-063-250-CCA

**TECHNICAL DATA**

DESCRIPTION	SPECIFICATION
Physical Characteristics	
Conductor Material	22 AWG CCA x 2pair
Insulation Material	100% Polyethylene
Jacket Material	PVC
Minimum Bend Radius (Install)	25mm
Pull Tension	108N (11kg)
Electrical Characteristics	
Conductor DC resistance @ 20 °C (max)	9.38 Ω/100m
DC Resistance Unbalance (max)	5%
Mutual Capacitance @ 20 °C (max)	5.6nF/100m
Operating Voltage (max)	300VDC
Worst Case Cable Screw	45ns/100m
Nominal Velocity of Propagation	70%
Maximum Operating Temperature (°C)	70