

dewpoint

Fluenz III

DRAINAGE PUMP



dewpoint

Features


- Stylish design
- High efficiency and silent operation
- High stability and durability motor
- Unique inlet tube design, has the filtration function to prevent drainage blockage
- Innovative design with reverse flowing valve, effectively prevents water back flow
- The best PU material effectively isolating the device from outside and inside temperature change, preventing damage to the device which could cause leakages
- Simple installation, user friendly



SPECIFICATION & DIMENSION

Model	DDP1060CE	DDP1060CM
Type	ELECTRICAL	MECHANICAL
Voltage	AC220V~AC240V/1/50Hz	AC220V~AC240V/1/50Hz
Power Rating	0.25A	0.25A
Watt	27W	27W
Max. Pump Lift	3M	3M
Sound Level	36 ± 3db	36 ± 3db
Drainage Tube	1/4"	1/4"
Coverage	≤60,000 BTU/hr	≤60,000 BTU/hr
Dimension (WxDxH)	175 x 108 x 150mm	175 x 108 x 150mm
Weight	1.8kg	1.7kg
Control Method	Electronic Board	Mechanical Floating Ball

Discharge Diagram

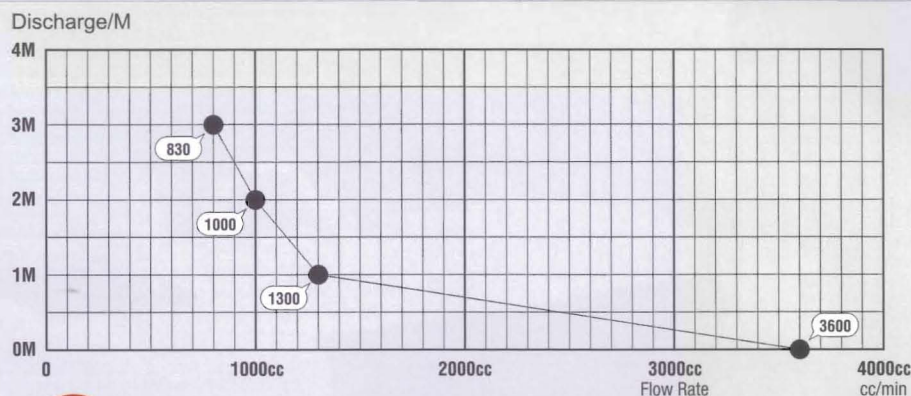

! Please use independent power point

The pump needs to be on 24 hours power supply to avoid overflow

www.york.com.my

Group Associated (C&L) Sdn Bhd (109719-M)

Head Office: Tel: 03-7718 8388 Fax: 03-7727 4371

Email: sales_enquiry@york.com.my customer_service@york.com.my

Branches:

- Penang Tel: 04-331 1670
- Perak Tel: 05-548 2307
- Sarawak Tel: 082-333 299
- Johor Tel: 07-557 7788
- Melaka Tel: 06-288 1133
- Negeri Sembilan Tel: 06-768 8969
- Pahang Tel: 09-567 6778
- Sabah Tel: 088-722 194

Service Centre:

- Alor Setar Tel: 04-331 1667 / 733 0235
- Kota Bharu Tel: 09-747 4578 / 747 4678

Authorized dealer: