

UTP1-GSW0401-TP60




- Main Ports: 4x downlink gigabit PoE Ethernet ports, 1x uplink gigabit Ethernet ports;
- Unique Feature: one-key CCTV mode, which can restrain network storm, realize VLAN function and 1~4 downlink ports only able to communicate with uplink ports;
- Power Input: DC48V~57V;
- Standard: IEEE802.3, IEEE802.3u, IEEE 802.3ab, IEEE802.3 af, IEEE802.3at;
- Protection: Superior lightning protection (6KV), ESD protection and anti-interference ability;
- Structure: stable and delicate, easy to install;
- Operation: plug and play, no any settings needed.




Introduction

The 5 Ports Full Gigabit PoE Switch is specially designed for the application of high definition network security surveillance system. The PoE switch provides 4 Gigabit downlink PoE ports support 802.3at and 1 Port Gigabit uplink ports. The total PoE power output is up to 60 watts. It's widely used in surveillance monitor and Ethernet network solution.


Application

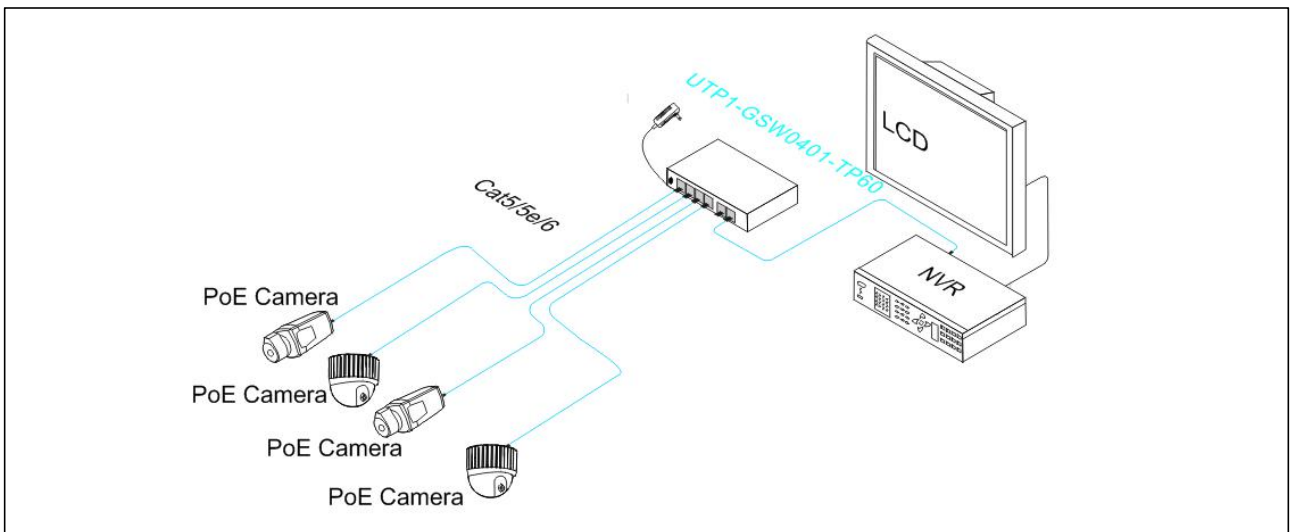

Physical Features

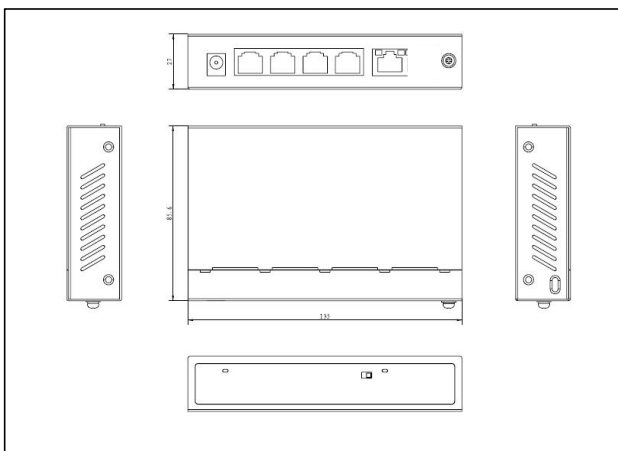

Interface drawing

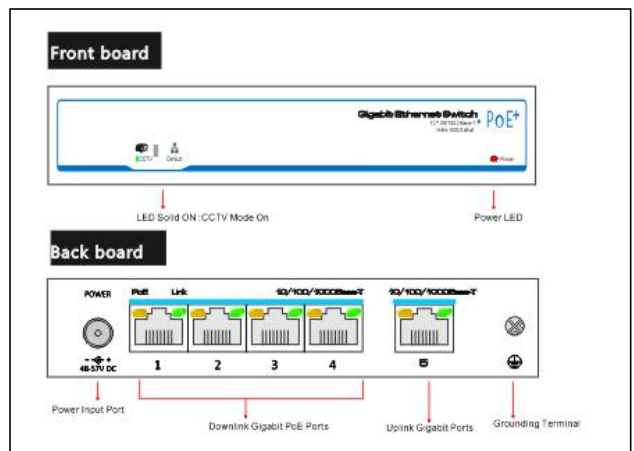

Specification

Model	UTP1-GSW0401-TP60
Downstream Ports	4* 10/100/1000Base-T (PoE)
Uplink Ports	1*10/100/1000Base-T
Standard and Protocols	IEEE802.3、IEEE802.3u、IEEE802.3ab、IEEE802.3 X
Switching Capacity	10Gbps
Packet Forwarding Rate	7.44Mpps
Forwarding Modes	Store and Forward
MAC Address Table	2K
PoE Standard	802.3af/at(PSE)
PoE Power Method	End-span
PoE Line Pair	1/2(+), 3/6(-)
PoE Output Power	54V DC , 30 watts max
PoE Budget	60 watts max
Surge Immunity	6KV Execute : IEC61000-4-5
ESD Immunity	6KV Contact discharge 8KV Air discharge Execute : IEC61000-4-2
Input Voltage	DC 48V~57V
Power Consumption	<5W
Operating Temperature	-10°C~45°C
Storage temperature	-40°C~85°C
Humidity(Non-condensing)	5%-95%
Dimension (L×W×H)	135mm×86mm×27mm
Weight	343g
Certification	CE、FCC、ROHS

Package List

Designation	Quantity
UTP3-GSW04-TP60	1
Power Adapter	1
Accessory	1
User Manual	1

Related Products

Designation	Model
8 Ports Full Gigabit PoE Switch	UTP3-GSW0802-TP120