
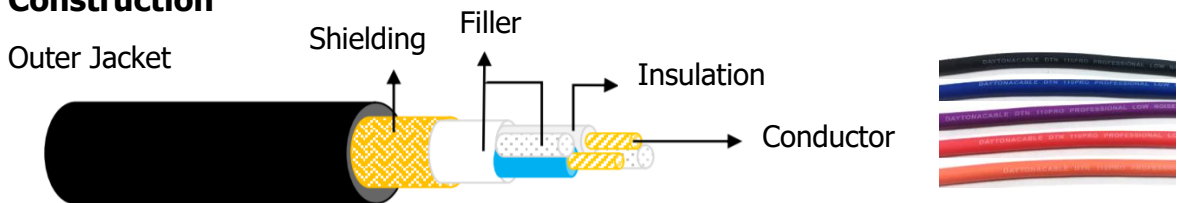


CABLE SPECIFICATION

Type: Stereo Microphone Cable
Specification: [(19 / 0.12MM BC + 1/#Tinsel Wire) x 2C + Cotton + Paper + 96 / 0.10MM BC] x 1C
Cable Printing: DAYTONACABLE DTN110PRO PROFESSIONAL LOW NOISE MICROPHONE CABLE MADE IN TAIWAN
Appearance:

SHAPE	COLOUR	LENGTH	PACKAGE
Circle	Black, Red, Blue Orange, Purple	100 Yard	Paper Spool 

Construction



Conductor

Material: Bare Copper (OFC)
 Constructor : 19 x 0.12MM + 1 x # 1 Tinsel Wire
 Cross Section: AWG 24 x 2

Insulation

Material: Polyethylene (PE)
 Thickness: 0.45MM
 Diameter: 1.6MM x 2C
 Colour: (1) White (2) Blue

Filler

Material: Cotton + Paper

Shielding

Material: Bare Copper (OFC)
 Construction: 96 x 0.10MM Braiding
 Coverage: 75%

Outer Jacket

Material: Polyvinylchloride (PVC)
 Thickness: 1.20MM
 Diameter: 6.00MM

Operation Temp: -15°C ~ 60°C

Electric Characteristic

Conductor Resistance: 86Ω/KM
 Cond. / Cond/ Capacitance: 65 PF/M

